

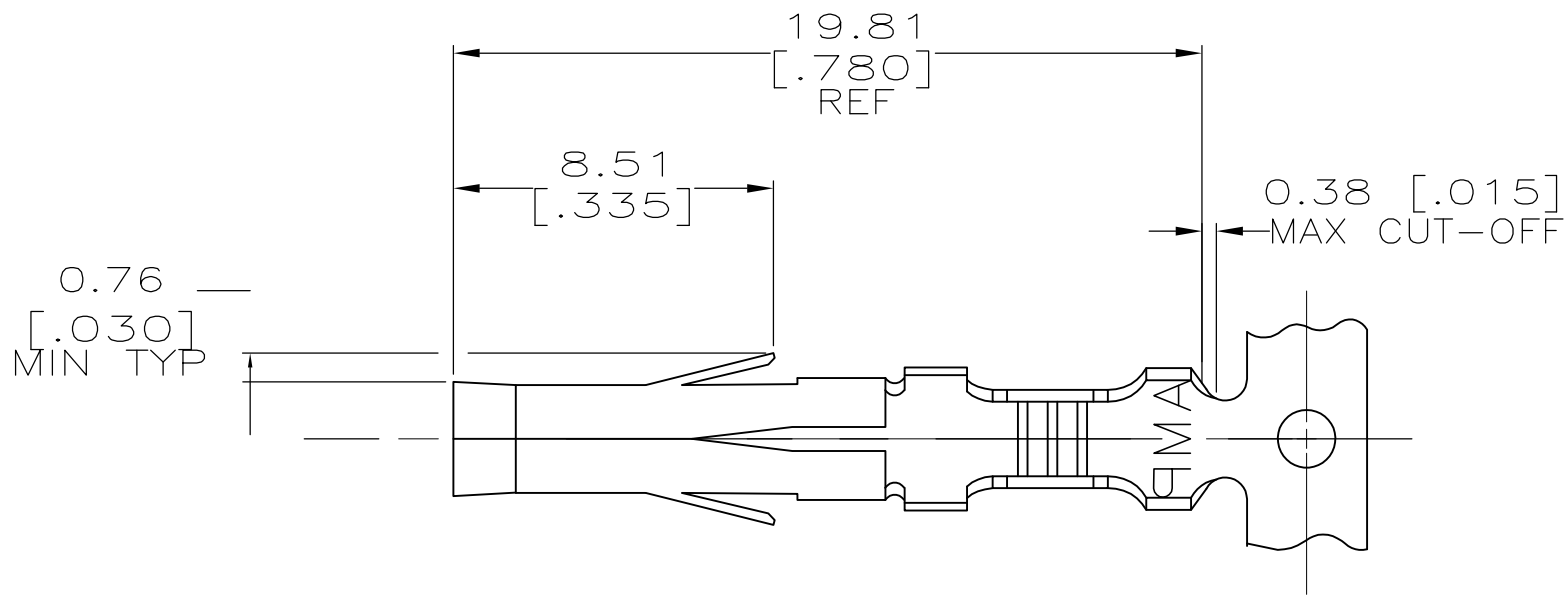
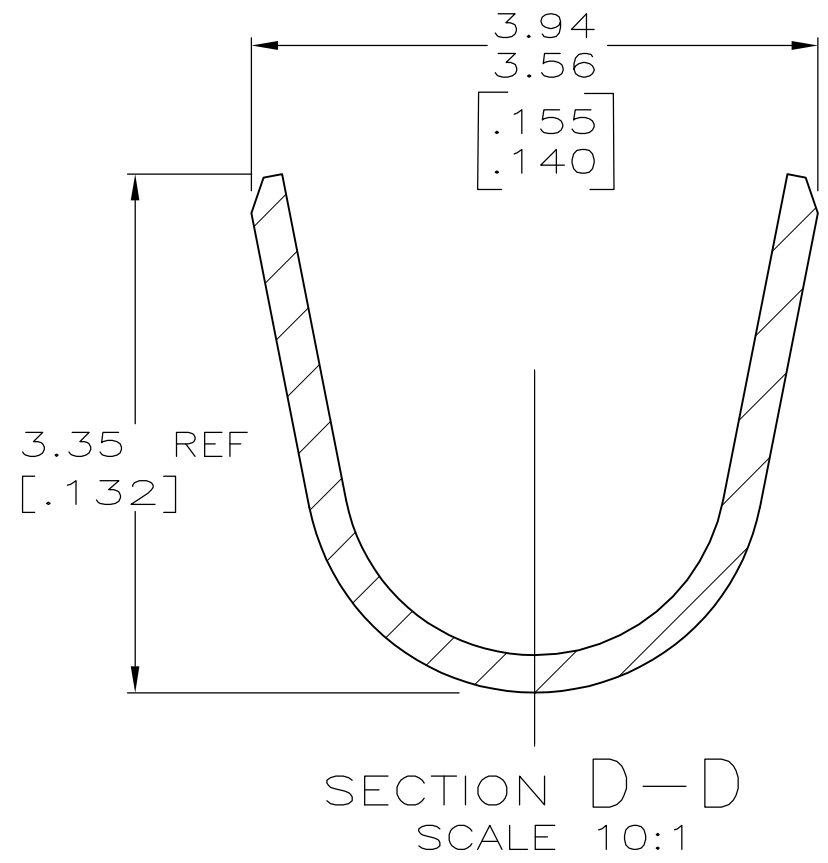
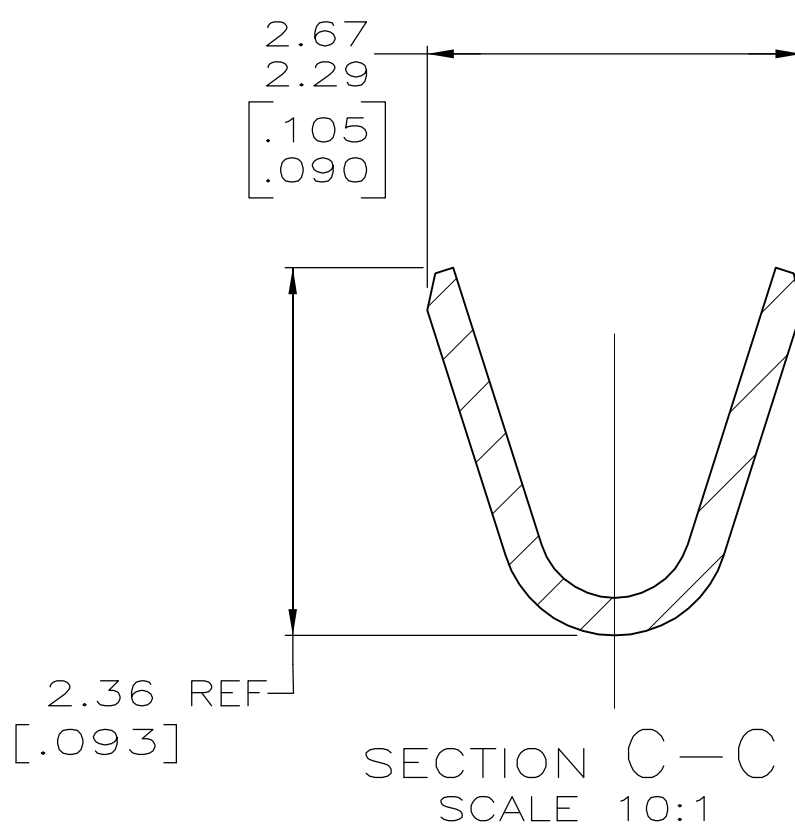
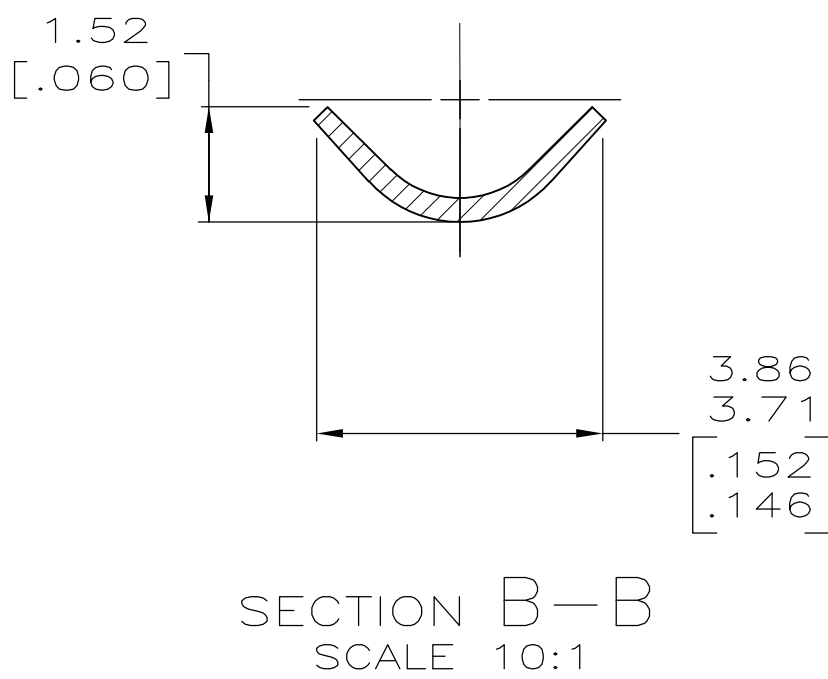
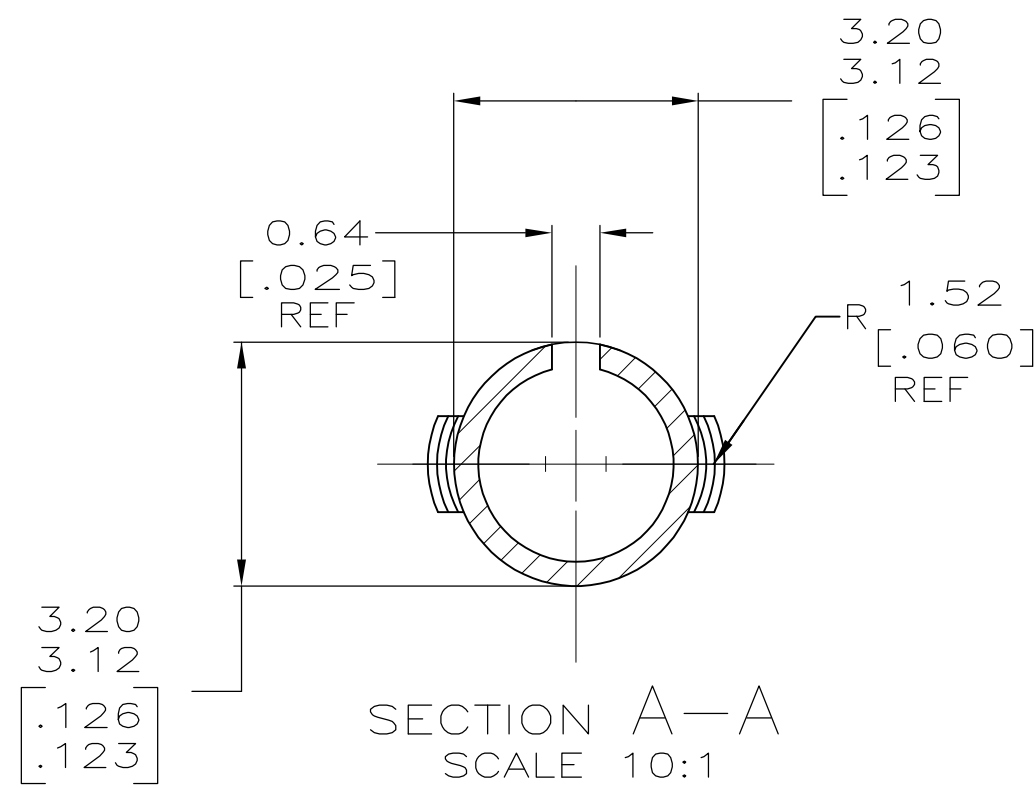


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	0	AP2	REVISED	PER ECO-11-004917	11MAR11	RK HMR

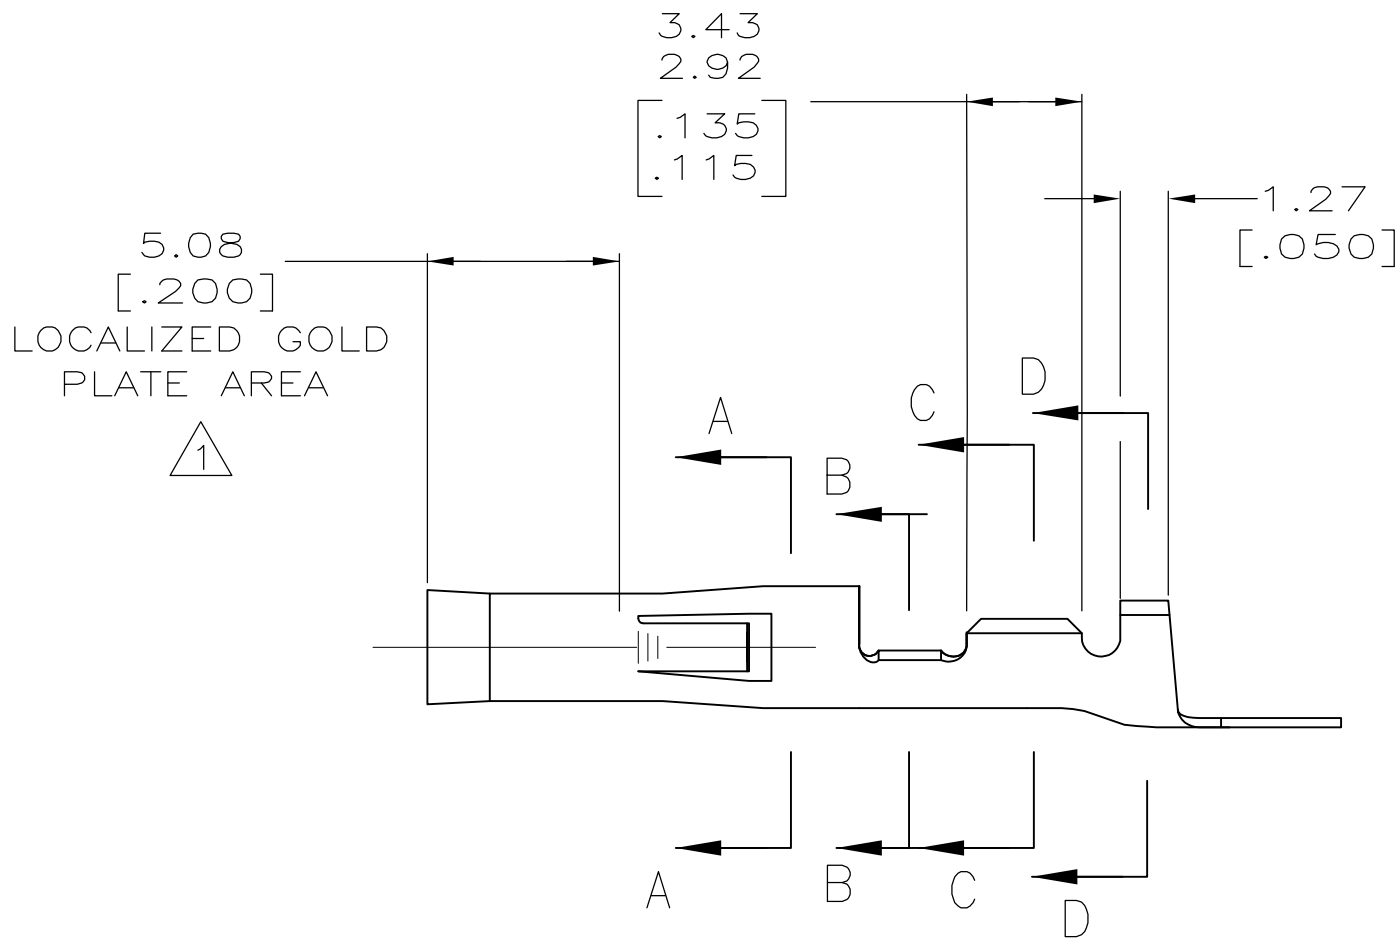


- 1 0.000762 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL.
- 2 WIRE RANGE: 0.3 – 0.84mm² (24–18 AWG).
- 3 INSULATION RANGE: 2.79 [.110] MAX. DIA.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.

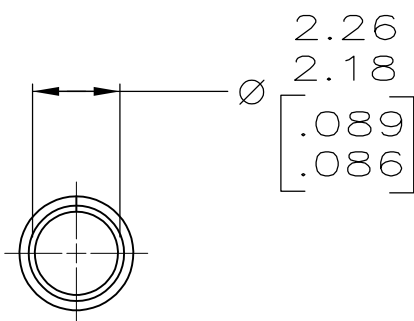

METRIC

GOLD STRIPE	0.25 [.010] BRASS	350417-5
1	0.25 [.010] BRASS	350417-3
PRE-TIN	0.25 [.010] BRASS	350417-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 22NOV2005	 TE Connectivity				
		CHK D. COLEY 22NOV2005					
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. COLEY 22NOV2005	NAME	.093 SOCKET COMMERCIAL PIN AND SOCKET —			
	0. PLC ± —	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO		
	1. PLC ± —	—				RESTRICTED TO	
	2. PLC ± —	—					
	3. PLC ± 0.13 [.005]	—					
	4. PLC ± — ± 0°30'	APPLICATION SPEC	A1	00779	C=350417		
	—	—				SCALE	
	—	—					5:1
	—	—					
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SHEET 1 OF 1				
		CUSTOMER DRAWING	REV. AP2				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350417-3](#)