

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER

ANSI/EIA-481 STANDARD

2.205 [56.0] WIDE; 1.260 [32.0] PITCH

2. REEL:

13.0 [330.2] DIA. 400 PIECES OF  
PART NO. 3006 PER REEL.

**KEYSTONE ELECTRONICS CORP.**

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME

24mm SM COIN CELL CLIP ON TAPE

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

BOONE

DATE

2.28.00

APP'D

LN

SCALE

X

TOLERANCES

INCH [MM]

DECIMAL ±.015 [±0.38]

ANGULAR ± 1°

UNLESS OTHERWISE SPECIFIED

CODE




C

DWG NO.

3006TR

4.17.06	CHANGE AS PER ECN 06-021	B
12.26.02	CHANGE AS PER ECN 02-088	A
DATE	DESCRIPTION	REV.

ACTUAL SIZE

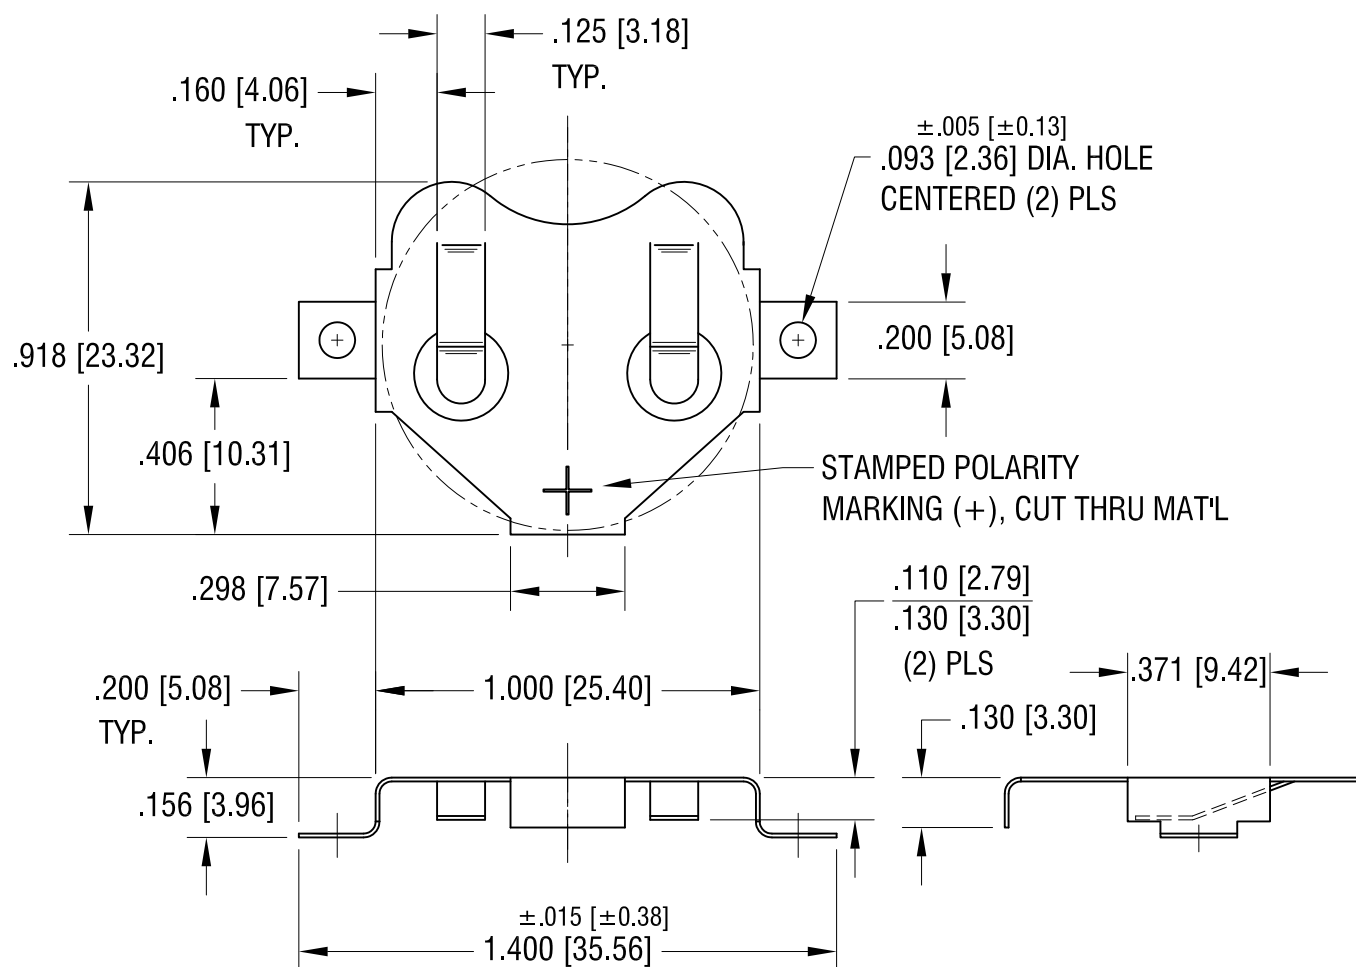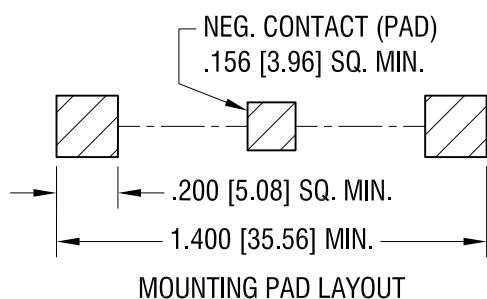

			<div>KEYSTONE ELECTRONICS CORP.</div> <div>www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900</div>			
			PART NAME			
			24mm SM COIN CELL CLIP			
			MATERIAL			
			.010 [0.25] TH'K PHOSPHOR BRONZE			
12.19.16	CHANGE AS PER ECN 16-108	L	FINISH		DRN BY	DATE
5.07.15	CHANGE AS PER ECN 15-052	K			BOONE	10.14.94
9.22.06	CHANGE AS PER ECN 06-058	H	TIN NICKEL PLATE		APP'D	SCALE
					LN	2X
			TOLERANCES		DWG NO.	
			INCH [MM]		C	
			DECIMAL ± .010 [± 0.25 ]			
			ANGULAR ± 1°			
			UNLESS OTHERWISE SPECIFIED		3006	
DATE	DESCRIPTION	REV.				

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[3006TR](#)