


D	-	-	-
	-	-	-
	-	-	-
C	-	-	-
	-	-	-
	-	-	-
B	-	-	-
	-	-	-
	-	-	-
A	-	-	-
	-	-	-
	-	-	-
D	-	-	-
	-	-	-
	-	-	-
C	-	-	-
	-	-	-
	-	-	-
B	-	-	-
	-	-	-
	-	-	-
A	-	-	-
	-	-	-
	-	-	-

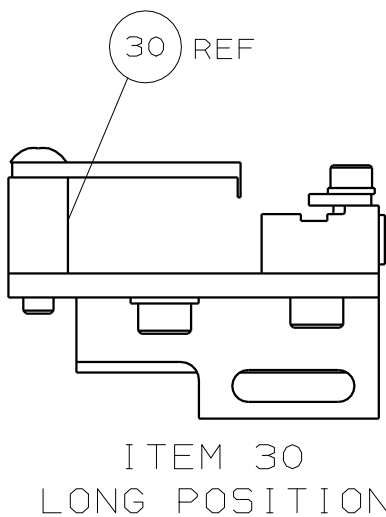

VIEW B ROTATED 180°

POST FEED 40 mm STROKE	POST FEED 30 mm STROKE	PRE FEED 30 mm STROKE	PRE FEED 40 mm STROKE

LOC
A
DIST
66

44 (REF) 49 47 48

QTY REQD PER ASSY				PARTS LIST							
		DIMENSIONS: mm [INCHES]		MATERIAL		HT TR		FIN			
		DO NOT SCALE PRINT.		-		-		-		-	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR 19APR02		APP 19APR02					
LJL	APR06	1 PLC DEC ±		M.CLIFFORD		F.BACKHURST					
LJL	AUG05	2 PLC DEC ±		CHK -		REL 04-07-02					
BH	JUL03	3 PLC DEC ±				M.CLIFFORD					
LJL	AUG02	ANGLES ±		NAME		SIDE FEED HD-I APPLICATOR				MACHINE REF	
MC	JUL02	SURF TEXTURE:		SCALE		DNG		1426314		SHEET REV	
APP	DATE	REMOVE BURRS, BREAK SHARP EDGES RO. 38 MAX		-		D				1 of 1	
		CASE CODE		CUSTOMER AND ASSEMBLY DRAWING							
		00779									
				RESTRICTED TO							
				-							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1426314-2](#)