
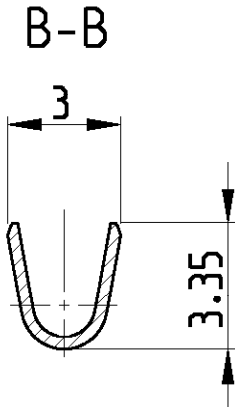
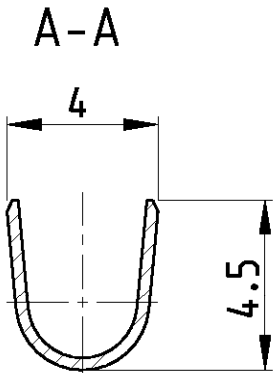
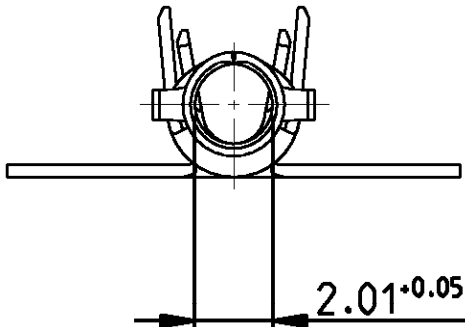



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AL	2		M5	REVISED PER ECR-16-009210	28JAN2017	BW RS

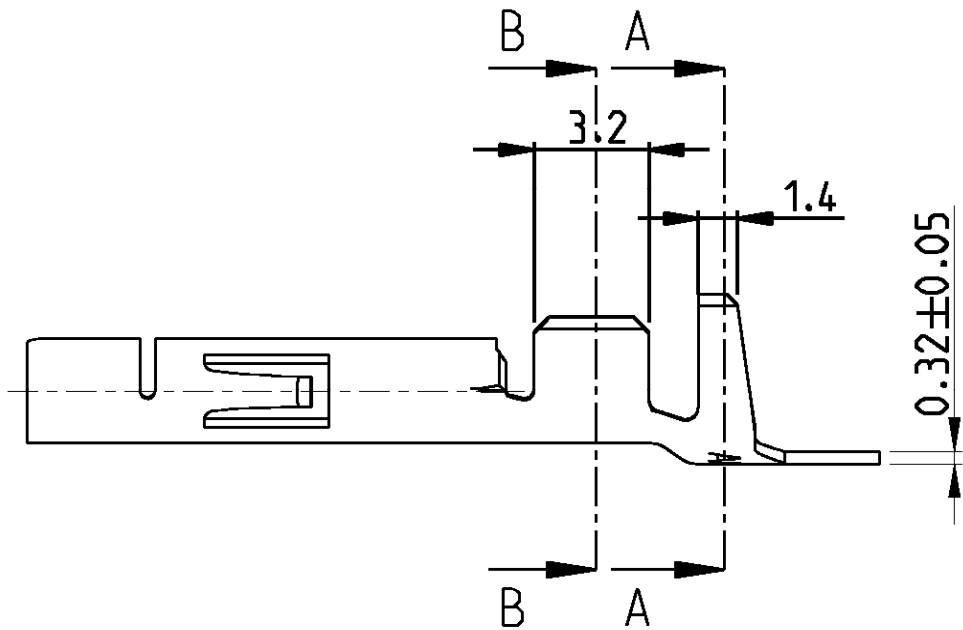



NOTES:

Bemerkungen:

- 12-6 µm Sn OVER Ni IN CRIMP-AREA  
2-6 µm Sn über Ni in der Crimpzone
- 20.8 µm Au OVER Ni IN CONTACT-AREA  
0.8 µm Au über Ni in der Kontaktzone
- 3SUITABLE FOR Ø1.0-2.5mm  
Für Isolations Ø1.0-2.5mm geeignet
- 40.8 µm Au OVER 1.3 µm Ni ON INSIDE OF WIRE BARREL AND CONTACT AREA  
0.8 µm Au über 1.3 µm Ni in der Drahtcrimp und Kontaktzonen, sonst 1.3 µm Ni

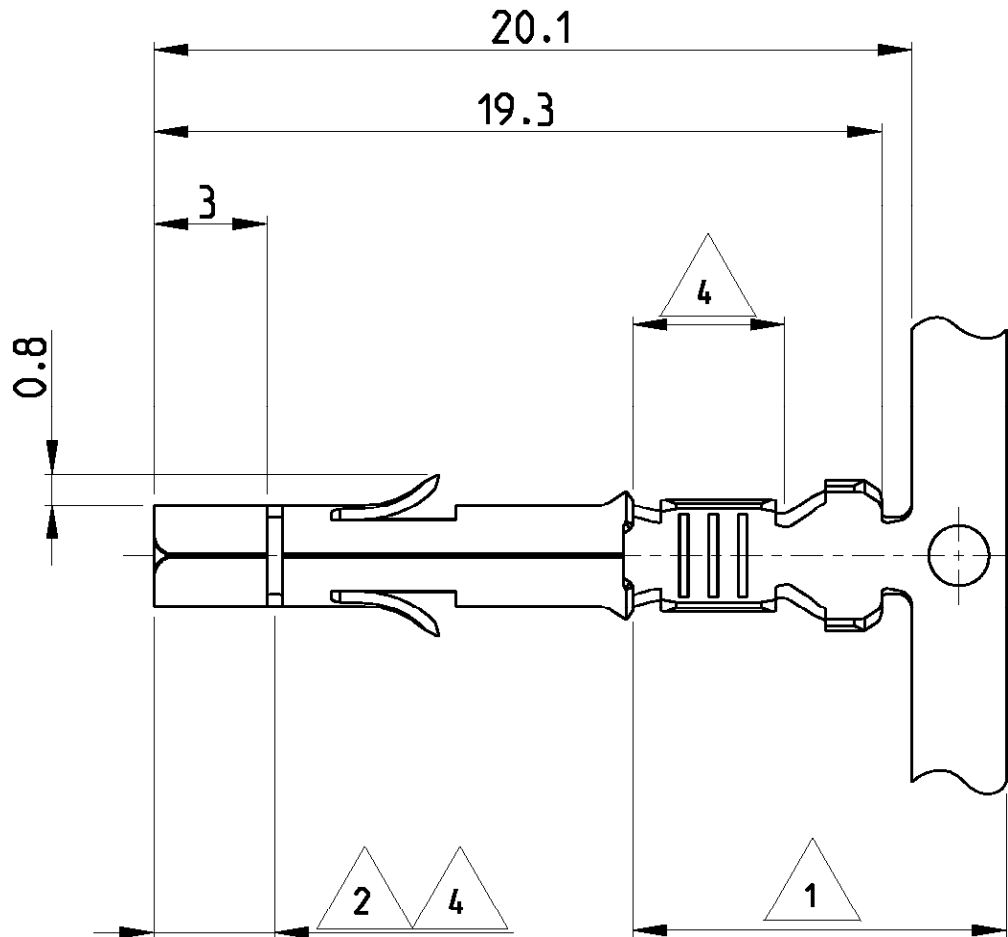

SUPERSEDED BY 350536-7 Superseded by 350536-6 OBSOLETE OBSOLETE SUPERSEDED BY 350536-2	107-3. FIG.2		926882-8	BRASS	PRE-TIN
	107-3. FIG.1	926893-7	926884-7	BRASS	12
	107-3. FIG.1	926893-6	926884-6	PHOS BRONZE	12
	107-3. FIG.1	926893-5	926882-5	COPPER ALLOY	PRE-TIN
	107-3. FIG.1	926893-4	926882-4	COPPER ALLOY	PLAIN
	107-3. FIG.1	926893-3	926882-3	PHOS BRONZE	PRE-TIN
	107-3. FIG.1	926893-2	926882-2	BRASS	4
	107-3. FIG.1	926893-1	926882-1	BRASS	PRE-TIN
	REELING	LOOSE PIECE	PART NO.	MATERIAL	FINISH

		DWN <b>J.Skoda</b> 29NOV2005	 TE Connectivity			
DIMENSIONS:  <b>mm</b>		CHK <b>R.Vlcek</b> -	NAME  <b>UNIVERSAL MNL Socket</b> <b>0.5-2.1 mm2 WIRE RANGE</b>			
		APVD <b>M.Bleicher</b> -				
		PRODUCT SPEC  <b>108-1031</b>				
		APPLICATION SPEC  <b>114-18011</b>				
		WEIGHT  <b>-</b>				
MATERIAL  <b>SEE TABLE</b>	TOLERANCES UNLESS OTHERWISE SPECIFIED:  0 PLC <b>±0.2</b> 1 PLC <b>±0.2</b> 2 PLC <b>±0.2</b> 3 PLC <b>A</b> 4 PLC <b>A</b> ANGLES <b>±1°</b>	FINISH  <b>SEE TABLE</b>	SIZE  <b>A3</b>	CAGE CODE  <b>00779</b>	DRAWING NO  <b>Ⓒ-926882</b>	RESTRICTED TO
<b>CUSTOMER DRAWING</b>			SCALE  <b>5:1</b>	SHEET  <b>1</b>	OF  <b>1</b>	REV  <b>M5</b>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[926882-7](#) [926882-3 \(Mouser Reel\)](#)