
Pomona®

Model PT080 High Density Pin Tip Plug, Each End

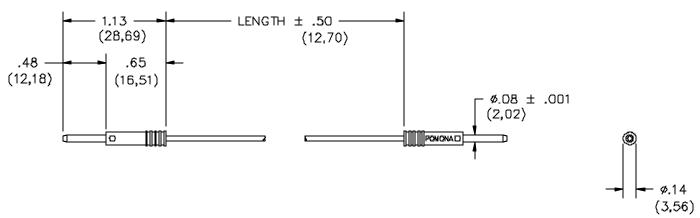

FEATURES:

- Mate to Model #3542, 4773 or any other standard .08 inch pin jack.
- Ideal for use as jumper wires on chassis boxes.

MATERIALS:

Conn: Pin Tip Plug

Material: Brass Per QQ-B-626, Alloy 360, ¹/₂ Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, Class I, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire.

Color: Matches color of wire.

Marking: "POMONA ELECTRONICS CALIF."

Wire: 22 AWG, stranding 19 x 34, t.c., PVC insulated, 1.63 (.064) O.D.

Color: See Ordering Information.

Marking: "POMONA PT080-XX"

RATINGS:

Operating Temperature: +55°C. (+131°F.) Max. Operating Voltage: 1000 WVDC Current: 3 Amperes Cont.

ORDERING INFORMATION: Model PT080-XX-*

XX = Cable Lengths, Standard Lengths: 4" (102), 8" (305), 18" (457), 24" (610), 36" (914), 48" (1219) & 60" (1524). Additional lengths can be quoted upon request.

*= Color, -0 Black, -2 Red

Ordering Example: PT080-60-2 Indicates 60" in length, Color is Red

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

 6/9/99
 Sales: 800-490-2361 Fax: 888-403-3360

 SY/EH/LS
 Technical Assistance: 800-241-2060

 S:\Engineering\Release\DataSheets\FlukeDataSheettd_PT080_1109_1_01.doc

Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona: <u>PT080-8-2</u> <u>PT080-8-0</u>