

4


3

2

1

LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D	ECR-14-011637	22AUG2014	HZ	RZ

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.2dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
2. MINIMUM RETURN LOSS: 55 dB
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702.

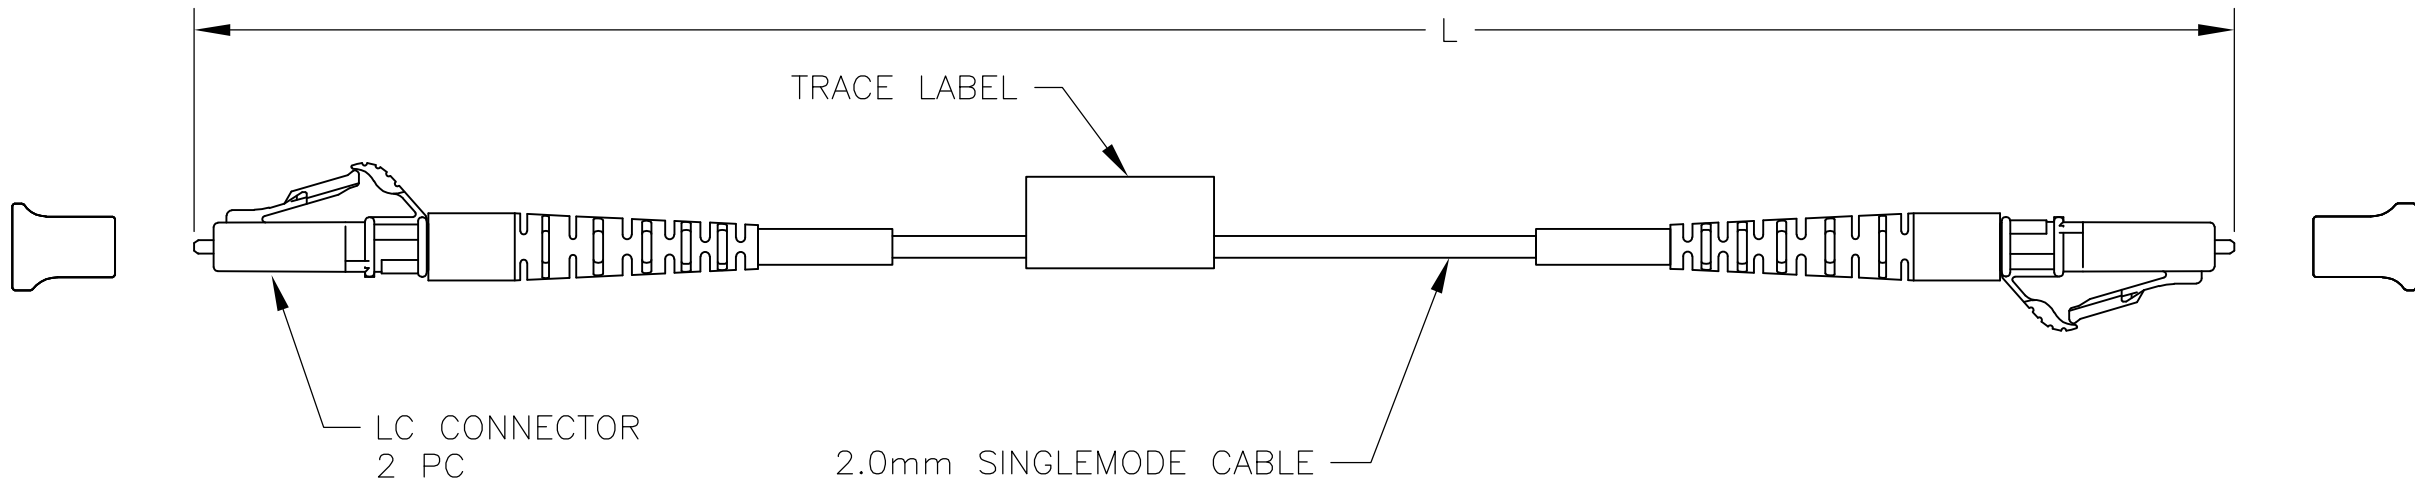

0.20	0.40+0.05/-0.0 [15.74+2.00/-0.0]	1-6374110-1
0.21	10.00±0.15 [393.70±6.0]	1-6374110-0
0.20	2.60±0.05 [102.3±2.0]	6374110-9
0.20	1.63±0.05 [64.0±2.0]	6374110-8
0.20	0.476±0.040 [18.8±1.6]	6374110-7
0.20	0.343±0.040 [13.5±1.6]	6374110-6
0.20	5.00±0.08 [196.90±3.00]	6374110-5
0.20	4.00±0.08 [157.50±3.00]	6374110-4
0.20	3.00±0.05 [118.10±2.00]	6374110-3
0.20	2.00±0.05 [78.70±2.00]	6374110-2
0.20	1.00±0.05 [39.40±2.00]	6374110-1
MAX IL (dB)		L
		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
METERS [INCHES]

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

-

DWN KATHY HE 28SEP05

CHK RICHARD ZHAO 28SEP05

APVD J.DUNCAN 28SEP05

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

CABLE ASSY, FIBER OPTIC, 2.0mm , SM

LC TO LC, OPTIMATE

SIZE A3

CAGE CODE 00779

DRAWING NO C-6374110

RESTRICTED TO

SCALE NTS

SHEET 1 OF 1

REV D

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6374110-1](#)