




Epoxy-Dipped Monolithic Ceramic Capacitors 21Rxxxx-RC Series

FEATURES

- Epoxy-dipped multilayer ceramic capacitors are built with superior moisture and shock resistant epoxy coating
- Have wide application in temperature compensation circuits, blocking, coupling, power storage and memory circuits.

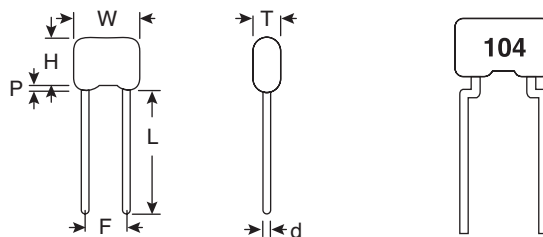

CHARACTERISTICS

Item	Characteristics		
	NPO	X7R	Z5U
Dielectric Material	NPO	X7R	Z5U
Temperature Characteristics	0 ±30ppm/°C	±15%	+22 ~ -56%
Operating Temperature	-55°C -- +125°C	-55°C - +125°C	+10°C - +85°C
Working Voltage (WV)	50 Volts	50 Volts	50 Volts
Dissipation Factor (DF)@ 25°C	0.15% max. @ 1±0.2 Vrms: 1 MHz for ≤1,000pF; 1 KHz for >1,000pF	2.5% max. @ 1±0.2 Vrms, 1 KHz	2.5% max. @ 0.5±0.1 Vrms, 1 KHz
Insulation Resistance @25°C With WV applied for 60 seconds	100G Ω or 1,000MΩ per pF; whichever is less	100G Ω or 1,000MΩ per pF; whichever is less	10G Ω or 100MΩ per pF; whichever is less
Dielectric Withstanding Voltage, 25°C	250% of WV for 5 seconds	250% of WV for 5 seconds	250% of WV for 5 seconds
Life Test	@ 125°C, 150% of WV for 1,000 hrs.	@ 125°C, 150% of WV for 1,000 hrs.	@ 85°C, 150% of WV for 240 hrs.
Aging Rate (per decade hour)	None	Typical 2.5%	Typical 5%
Available Tolerance	5%	10%	20%

MARKING SYSTEM

Capacitance is marked in 3 digits for capacitance value >100pF and marked in actual value for capacitance ≤100pF

SPECIFICATIONS

MOUSER STOCK NO.	Value	Tolerance	Dielectric	W (Max.)	T (Max.)	H (Max.)	F	L	P (Max.)	d
21RD610-RC	100pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RD622-RC	220pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RD647-RC	470pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RD710-RC	10pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RD722-RC	22pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RD747-RC	47pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RR510-RC	1000pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RR627-RC	270pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RR633-RC	330pF	5%	NPO	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RX310-RC	.1uF	10%	X7R	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RX410-RC	.01uF	10%	X7R	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RX421-RC	.02uF	10%	X7R	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RX510-RC	1000pF	10%	X7R	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RZ310-RC	.1uF	20%	Z5U	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05
21RZ410-RC	.01uF	20%	Z5U	3.8	2.5	3.8	2.5±0.25	6.0±0.5	1.5	0.5±0.05

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Xicon:](#)

[21RD610-RC](#) [21RD622-RC](#) [21RD647-RC](#) [21RD710-RC](#) [21RD722-RC](#) [21RD739-RC](#) [21RD747-RC](#) [21RR510-RC](#)
[21RR612-RC](#) [21RR627-RC](#) [21RR633-RC](#) [21RX310-RC](#) [21RX410-RC](#) [21RX510-RC](#) [21RZ310-RC](#) [21RZ410-RC](#)
[21RZ447-RC](#) [21RX421-RC](#)