


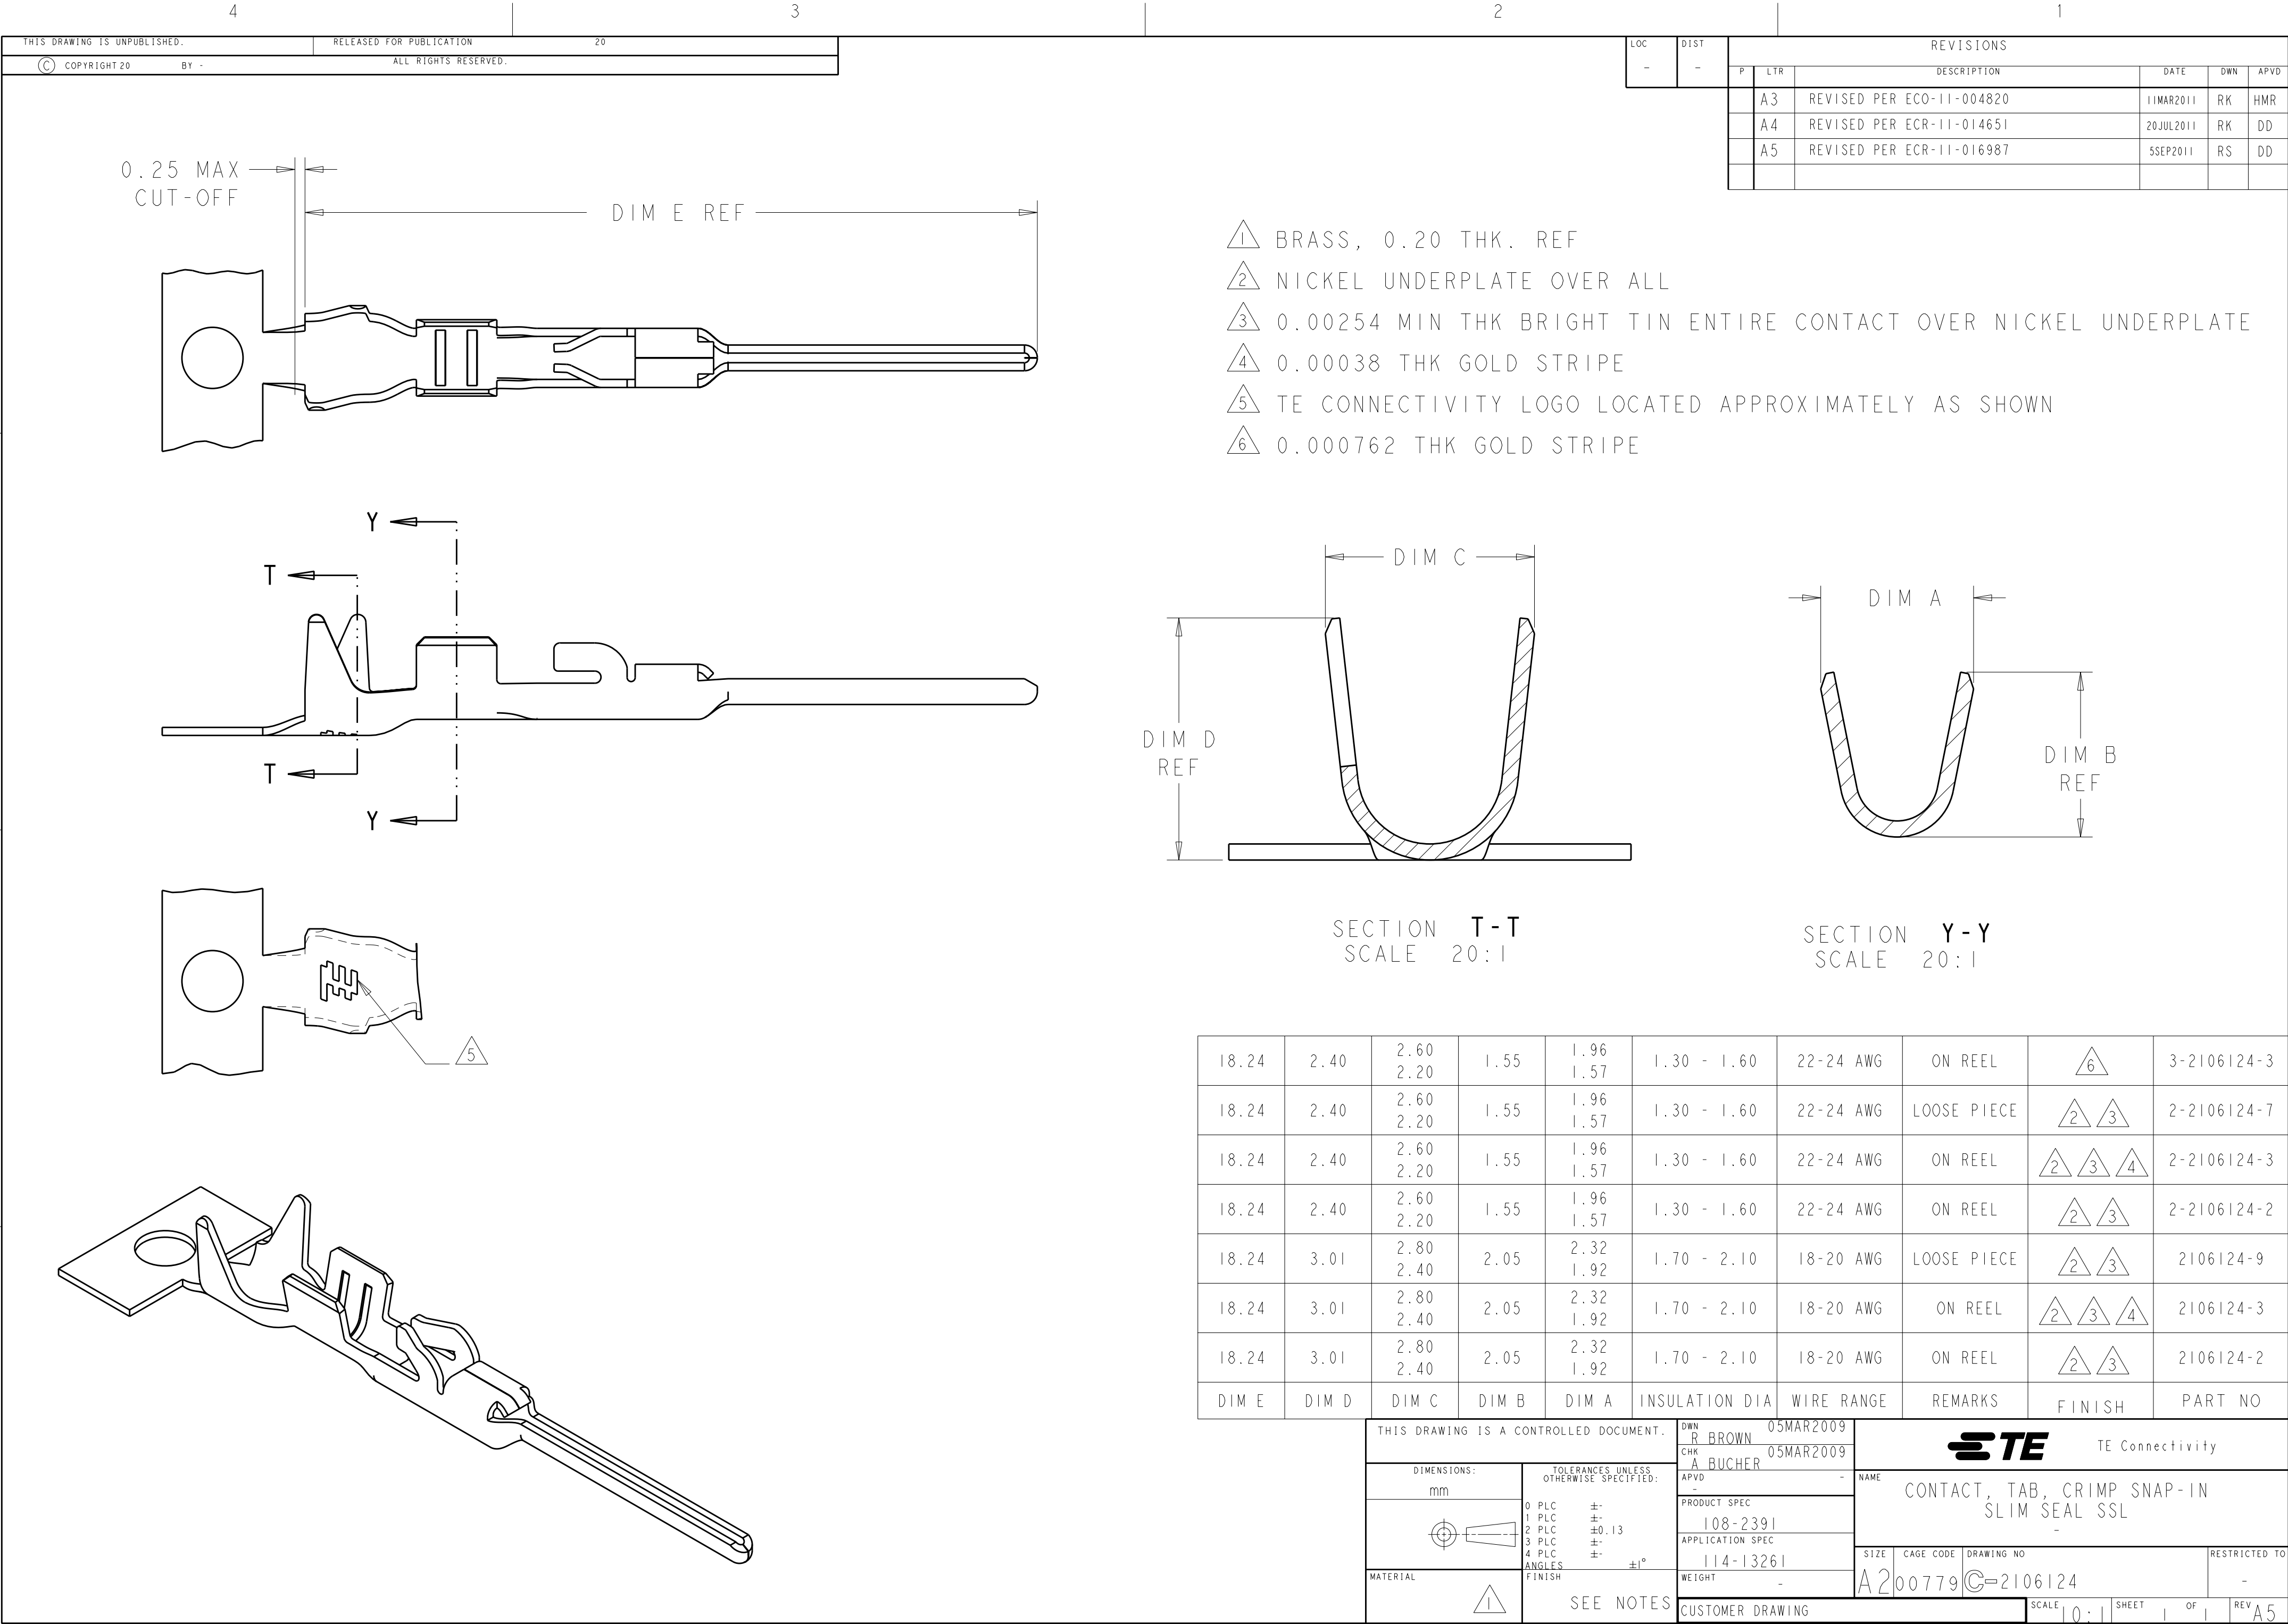

0.25 MAX CUT-OFF

DIM E REF

Y

T

T

Y

5

1

2

3

4

5

6

BRASS, 0.20 THK. REF

NICKEL UNDERPLATE OVER ALL

0.00254 MIN THK BRIGHT TIN ENTIRE CONTACT OVER NICKEL UNDERPLATE

0.00038 THK GOLD STRIPE

TE CONNECTIVITY LOGO LOCATED APPROXIMATELY AS SHOWN

0.000762 THK GOLD STRIPE

DIM C

DIM D REF

SECTION T-T

SCALE 20:1

DIM A

DIM B REF

SECTION Y-Y

SCALE 20:1

18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	ON REEL	6	3-2106124-3
18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	LOOSE PIECE	2 3	2-2106124-7
18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	ON REEL	2 3 4	2-2106124-3
18.24	2.40	2.60 2.20	1.55	1.96 1.57	1.30 - 1.60	22-24 AWG	ON REEL	2 3	2-2106124-2
18.24	3.01	2.80 2.40	2.05	2.32 1.92	1.70 - 2.10	18-20 AWG	LOOSE PIECE	2 3	2106124-9
18.24	3.01	2.80 2.40	2.05	2.32 1.92	1.70 - 2.10	18-20 AWG	ON REEL	2 3 4	2106124-3
18.24	3.01	2.80 2.40	2.05	2.32 1.92	1.70 - 2.10	18-20 AWG	ON REEL	2 3	2106124-2
DIM E	DIM D	DIM C	DIM B	DIM A	INSULATION DIA	WIRE RANGE	REMARKS	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R BROWN 05MAR2009

CHK A BUCHER 05MAR2009

APVD -

PRODUCT SPEC 108-2391

APPLICATION SPEC 114-13261

WEIGHT -

CUSTOMER DRAWING

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±0.13

3 PLC ±

4 PLC ±

ANGLES ±1°

FINISH

SEE NOTES

TE Connectivity

CONTACT, TAB, CRIMP SNAP-IN SLIM SEAL SSL

SIZE A2

CAGE CODE 00779

DRAWING NO C-2106124

RESTRICTED TO -

SCALE 10:1

SHEET 1

OF 1

REV A5

1471-9 (3/11)

Pro/ENGINEER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-2106124-8](#)