

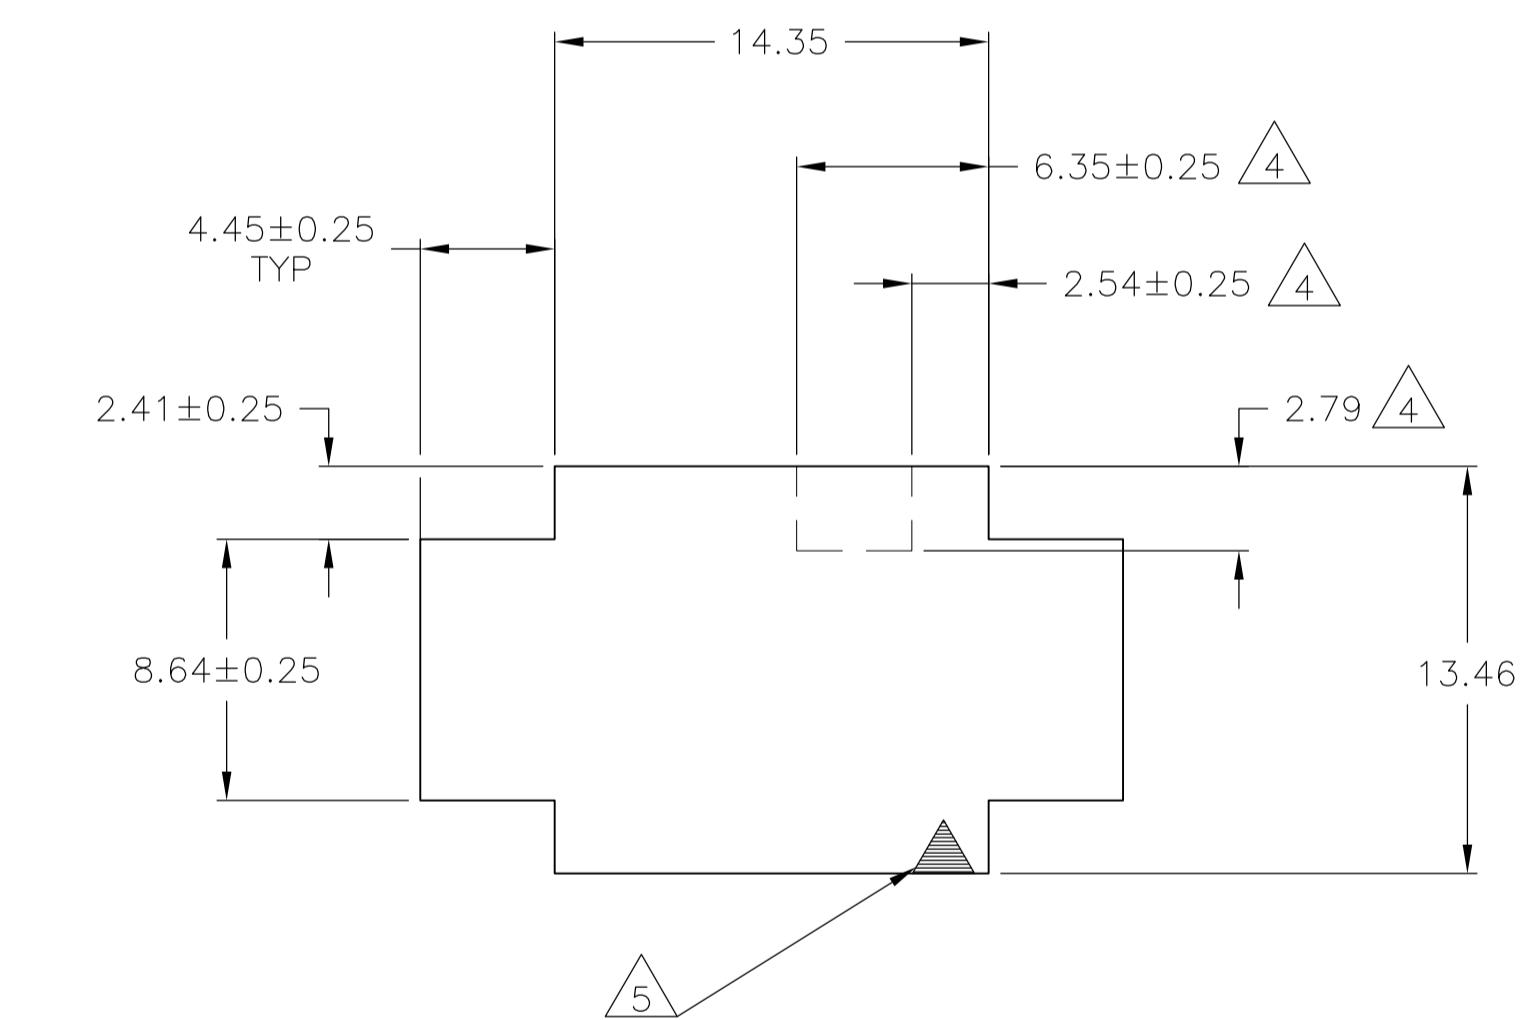


DETAIL A
OPTIONAL CONSTRUCTIONS

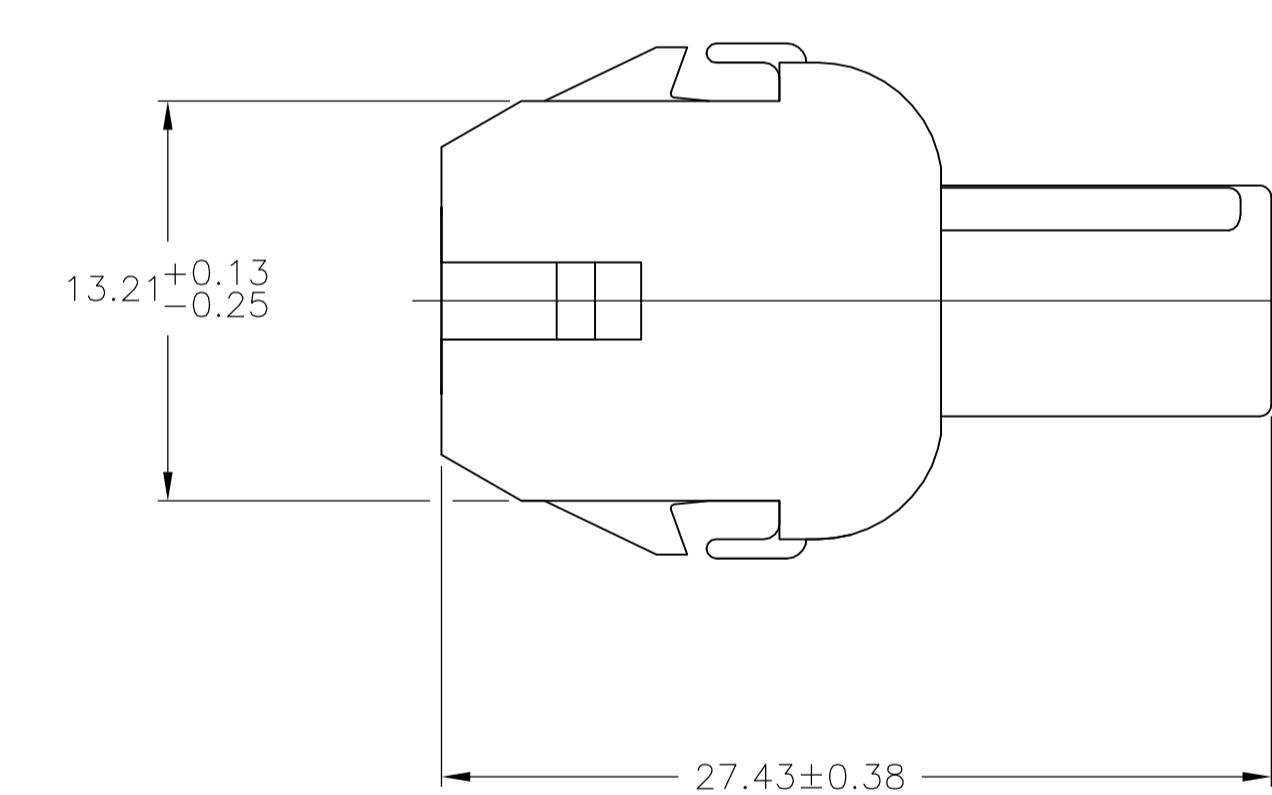

RECOMMENDED PANEL CUT OUT

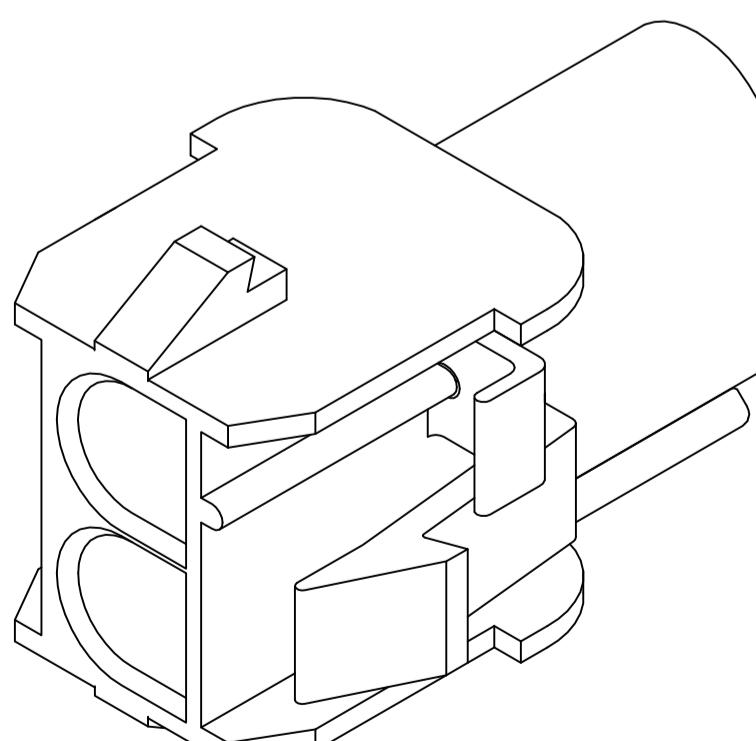

3-DIMENSIONAL MODEL
NTS

4.45	.175	27.43	1.080
2.79	.110	14.35	.565
2.54	.100	13.97	.550
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN
CONVERSION TABLE			

THIS DRAWING IS A CONTROLLED DOCUMENT.		24JUL92	TE Connectivity
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC		± -	
 R. SWING D. SELF		± 0.13	
PRODUCT SPEC		—	
APPLICATION SPEC		—	
MATERIAL NYLON,UL 94V-0		FINISH ± 1°	
WEIGHT	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	350778	—
CUSTOMER DRAWING			
SCALE 4:1 SHEET 1 OF 1 REV V3			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-350778-3](#)