
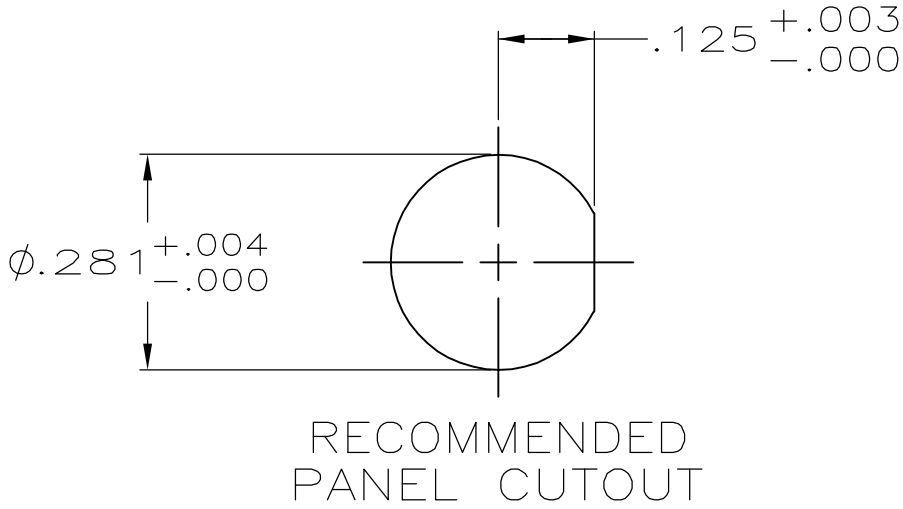


LOC	DIST	REVISIONS					
AJ	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			0	REV PER EC-0S14-0496-04	31JAN2005	LV	DC

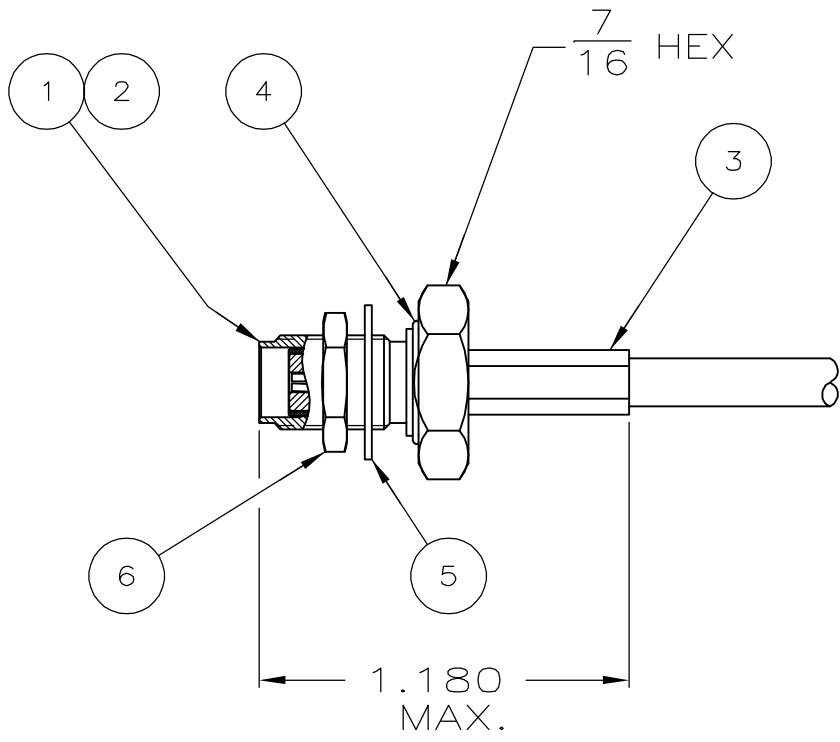

- ⚠


CENTER CONTACT: CRIMPING TOOL M22520/2-01
POSITIONER, DMC K997
SELECTOR SETTING PER TABLE.
- ⚠

FERRULE: CRIMPING TOOL M22520/5-01
DIE NUMBER OR HEX SIZE PER TABLE.
3.

PRODUCT IS DESIGNED TO MEET PRODUCT
SPECIFICATION 108-1574.
- ⚠

BRIGHT NICKEL PLATE.
5.

INSTRUCTION SHEET: 408-4032

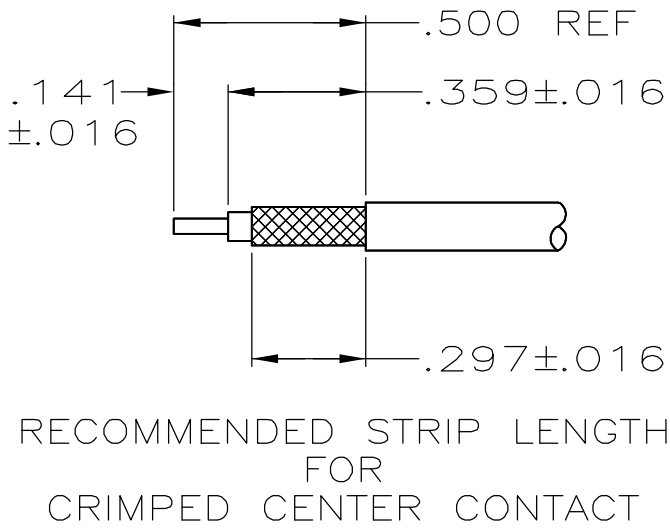

RECOMMENDED STRIP LENGTH
FOR
CRIMPED CENTER CONTACT

RG-174, 188 A, 316	DIE M22520/5-35 B OR .128X.400 HEX	#4		BRASS	2-332004-0	1-22145-3	1-22130-6	9-446556-1	447842-3	447870-4	5447650-3
CABLE SIZE	 DIE # OR HEX SIZE	 SELECTOR SETTING	FINISH	MATERIAL	 JAM NUT QTY=1	 LOCK WASHER QTY=1	 O-RING QTY=1	 FERRULE QTY=1	 CONTACT QTY=1	BULKHEAD JACK ASSY QTY=1	PART NUMBER
			SHELL								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5447650-3](#)