

UNCONTROLLED DOCUMENT



SC:1

PART NUMBER


REV.

LCM-E02002DWF

PRELIMINARY IN P/N DIR

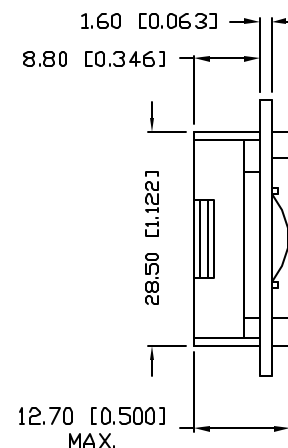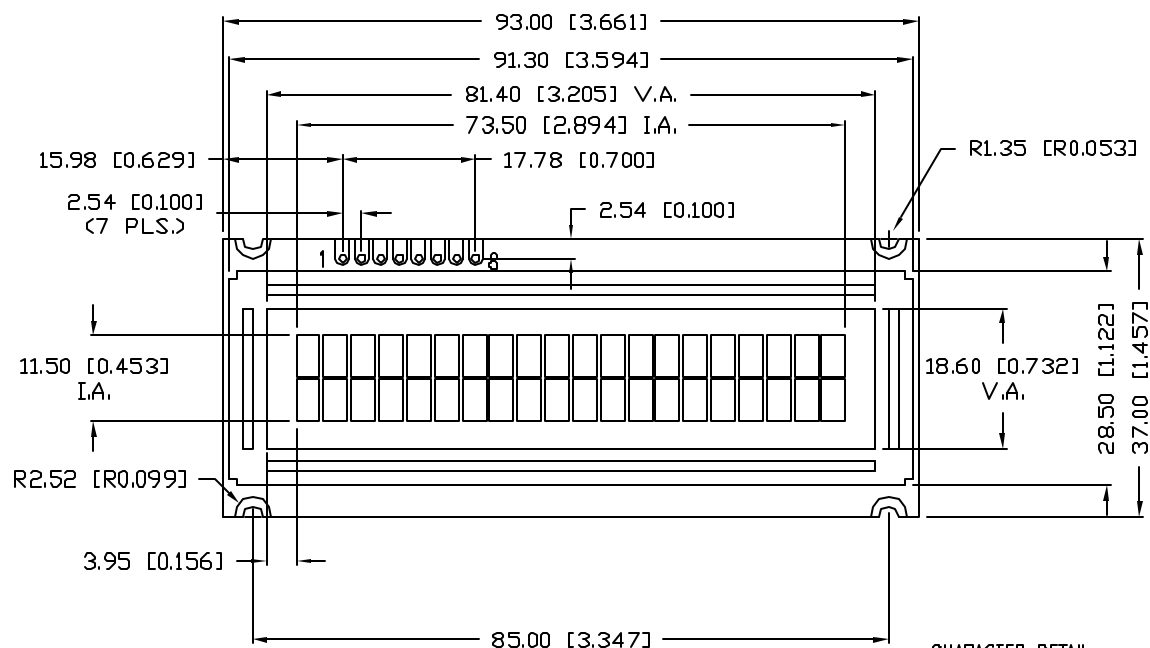

CHARACTER DETAIL

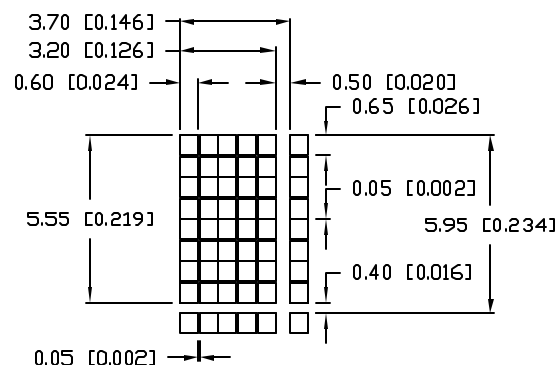

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT

REV.

PART NUMBER

LCM-E02002DWF

20 x 2 CHARACTER LCD MODULE, FSTN, TRANSFLECTIVE,
SERIAL INPUT, EDGE LIT GREEN LED BACKLIGHT,
1/17 DUTY, 1/5 BIAS, VLCD = 4.5V.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 01.31.08

PAGE: 1 OF 3


SCALE: N/A

JIN


LCM-E02002DWF

PRELIMINARY IN P/N DIR

ELECTRICAL CHARACTERISTICS		$V_{DD}=2.7V \sim 5.5V$, $T_A=-30^{\circ}C \sim +85^{\circ}C$				
ITEM	SYMBOL	CONDITION	STANDARD VALUE			UNIT
			MIN.	TYP.	MAX.	
SUPPLY VOLTAGE FOR LOGIC	$V_{DD}-V_{SS}$	—	—	5.0	—	V
SUPPLY CURRENT FOR LOGIC	I_{DD}	$V_{DD}=3V$	—	2.0	3.0	mA
INPUT VOLTAGE	HIGH	V_{IH}	—	$0.7V_{DD}$	—	V
	LOW	V_{IL}	—	-0.3	0.6	V
OUTPUT VOLTAGE	HIGH	V_{OH}	$I_{OH}=-0.205mA$	$0.75V_{DD}$	—	V
	LOW	V_{OL}	$I_{OL}=1.6mA$	—	$0.2V_{DD}$	V
LED BACKLIGHT	VOLTAGE	V_f	$I_f=TBAmA$	—	—	V
	CURRENT	I_f	—	—	—	mA
	POWER CONSUMPTION	PD	—	—	648	mW
	LUMINOUS INTENSITY	L	$I_f=TBAmA$	TBA	—	cd/m ²
	COLOR	—	—	565	—	nm

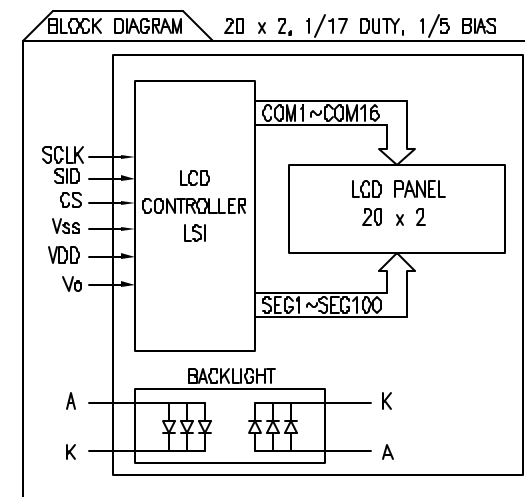

$V_{DD}-V_o$: LCD DRIVING VOLTAGE
 V_R : 10K Ω - 20K Ω



PIN CONFIGURATION				
PIN NO.	SYMBOL	LEVEL	FUNCTION	
1	V_{DD}	—	POWER SUPPLY	5V
2	V_{SS}	—		GROUND
3	V_o	—		FOR LCD DRIVE
4	$\overline{CS}$	H/L	CHIP SELECT SIGNAL H: CHIP DISABLED L: CHIP ENABLED	
5	SID	H/L	SERIAL INPUT DATA LINE	
6	SCLK	—	SERIAL CLOCK INPUT	
7	K	—	CATHODE	LED BACKLIGHT
8	A	—	ANODE	LED BACKLIGHT

ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	STANDARD VALUE		UNIT
		MIN	MAX	
POWER SUPPLY VOLTAGE	VDD	-0.3	7.0	V
POWER SUPPLY VOLTAGE	V_o	-15.0	+0.3	V
INPUT VOLTAGE	V_{in}	-0.3	3.0	V
OPERATING TEMPERATURE	T_{opr}	0	50	$^{\circ}C$
STORAGE TEMPERATURE	T_{stg}	-20	70	$^{\circ}C$

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCM-E02002DWF

20 x 2 CHARACTER LCD MODULE, FSTN, TRANSFLECTIVE,
 SERIAL INPUT, EDGE LIT GREEN LED BACKLIGHT,
 1/17 DUTY, 1/5 BIAS, VLCD = 4.5V.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
 PALATINE, IL 60067-6976
 PHONE: +1.847.359.2790
 US WEB: www.lumex.com
 TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 01.31.08

PAGE: 2 OF 3


SCALE: N/A

JIN

LCM-E02002DWF

PRELIMINARY IN P/N DIR

BACK VIEW FROM RIGHT SIDE PROJECTION

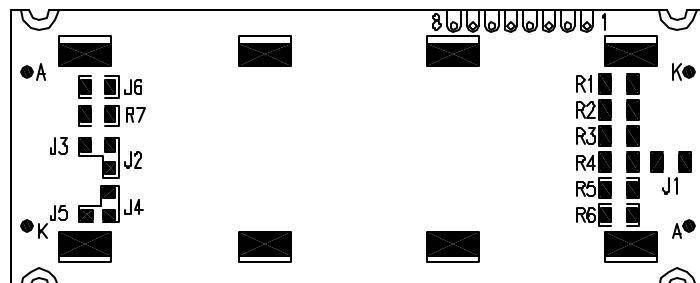

COMBINATIONS:

THE LED RESISTOR SHOULD BE BRIDGED AS FOLLOWING



THE 7TH PIN IS THE ANODE AND THE 8TH PIN IS THE CATHODE AS FOLLOWING



THE 7TH PIN IS THE CATHODE AND THE 8TH PIN IS THE ANODE AS FOLLOWING



THE METAL BEZEL IS ON GROUND AS FOLLOWING



LED POLARITY

SYMBOL	STATE	J3, J5	J2, J4	LED POLARITY	
				7 PIN	8 PIN
J2, J4	SOLDER BRIDGE	OPEN	-	ANODE	CATHODE
J3, J5	SOLDER BRIDGE	-	OPEN	CATHODE	ANODE

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCM-E02002DWF

20 x 2 CHARACTER LCD MODULE, FSTN, TRANSFLECTIVE,
SERIAL INPUT, EDGE LIT GREEN LED BACKLIGHT,
1/17 DUTY, 1/5 BIAS, VLCD = 4.5V.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 01.31.08

JN

PAGE: 3 OF 3

SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[LCM-E02002DWF](#)