


P	LTR	DESCRIPTION	DATE	DWN	APVD
	G2	SEE PCN E-14-018294	08DEC2014	MK	KR
	G3	ECR-15-002126	09FEB2015	GP	KR

1.5MM MALE TERMINAL SEALED
SUITABLE TERMINALS: FORD CAT2 (SUPPLIER YAZAKI)
2.8MM MALE TERMINAL SEALED
SUITABLE TERMINALS: FORD CAT3 (SUPPLIER YAZAKI OR TE)

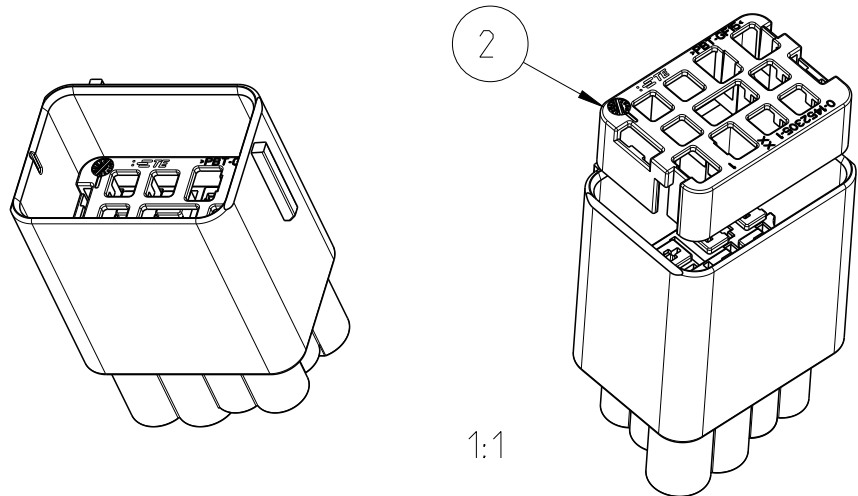

NOTES:
Bemerkungen:

DELIVERY

1 DELIVERY CONDITION: SPACER IN FIRE LOCK POSITION
Anlieferungszustand: Spacer in Vorraststellung

2 MATED WITH TE PART NO 1452299 AND 1452734
passend zu TE Teile Nr. 1452299 und 1452734

SC SIGNIFICANT CHARACTERISTIC
Significantes Merkmal

OPTIONAL BIGGER CHAMFERS ALLOWED

G3

45.9±0.3

32.9±0.3


31.8^{+0.08}_{-0.30}

A - A



7

MEASURING AREA
Messebene


CODING A

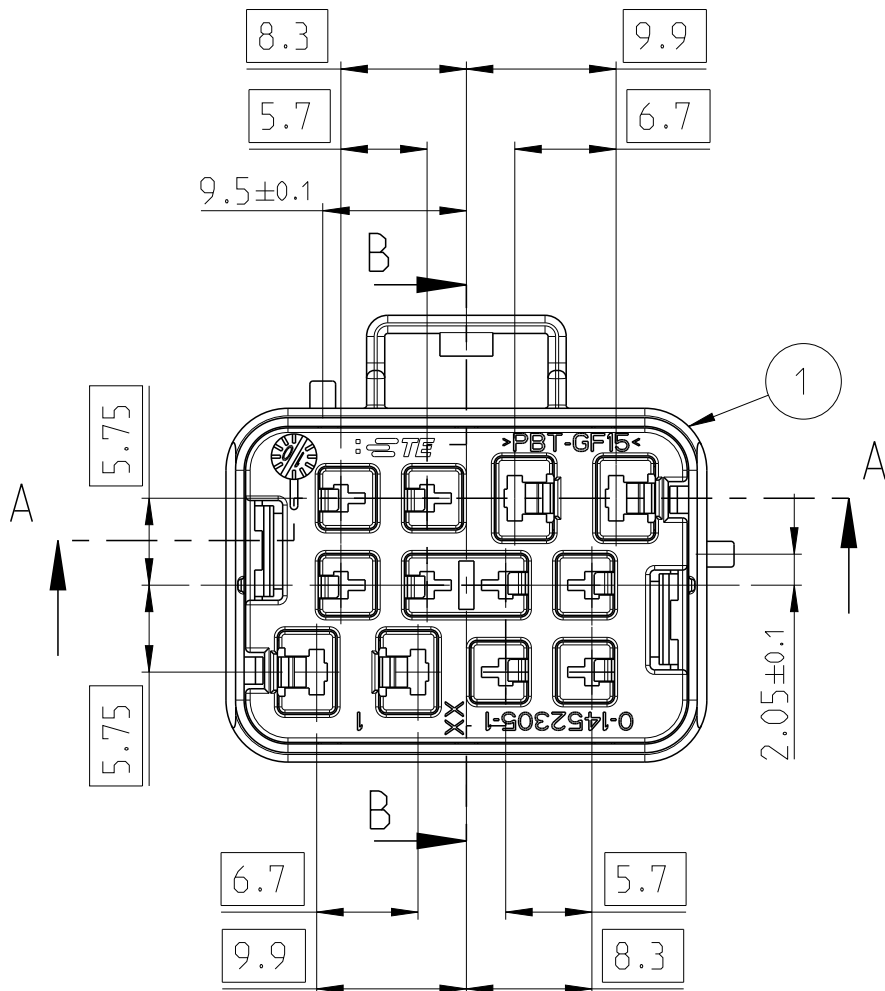


CLOSED CAVITIES / Geschlossene Kammern

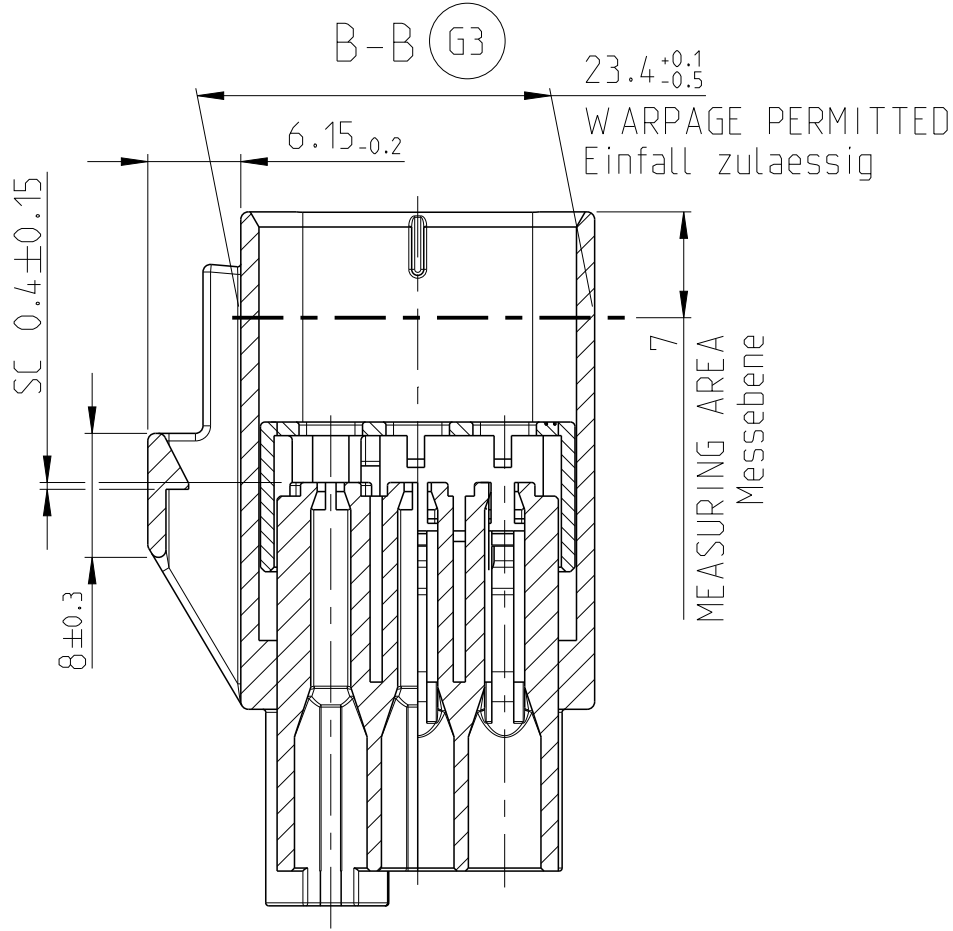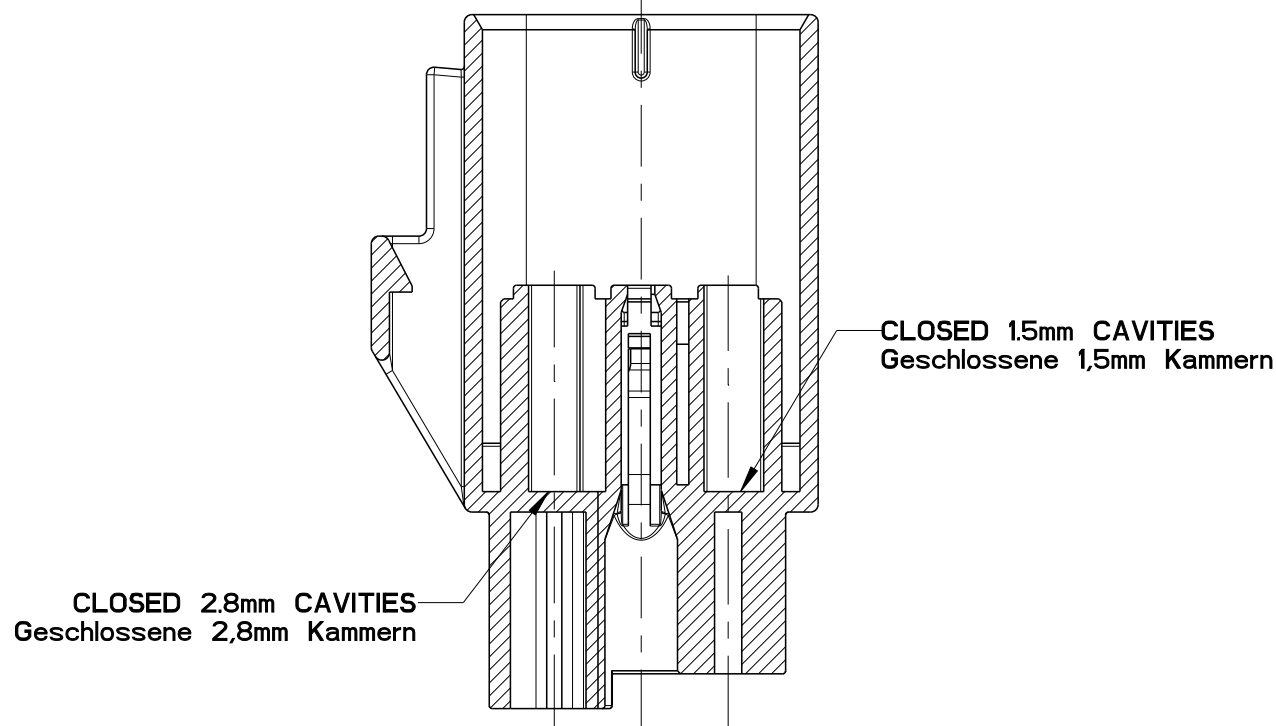

CODING B

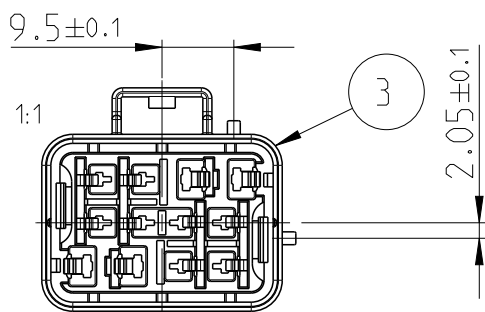

CODING C

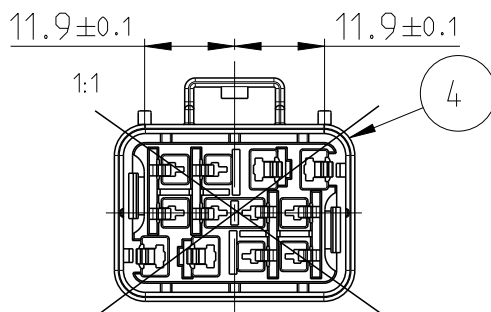

PINOUT CONFIGURATION

Pinoutkonfiguration

CODING A

3-1452303-1	X	X	X	X	X			X	X	X	X	X	X
1-1452303-1	X	X	X	X	X			X	X	X	X	X	X
0-1452303-1													
	1	2	3	4	5	6	7	8	9	10	11	12	
WITH "X" MARKED INDICATE CLOSED LOCATIONS Markierte Felder mit "X" kennzeichnen geschlossene Kammern													
BLANK CAVITIES INDICATE OPEN LOCATIONS FOR TERMINALS Leere Felder kennzeichnen offene Kammern fuer Kontakte													

CODING B

4-1452303-1	X	X	X	X	X							X	X
2-1452303-1	X	X	X	X	X							X	X
0-1452303-2													
	1	2	3	4	5	6	7	8	9	10	11	12	
WITH "X" MARKED INDICATE CLOSED LOCATIONS Markierte Felder mit "X" kennzeichnen geschlossene Kammern													
BLANK CAVITIES INDICATE OPEN LOCATIONS FOR TERMINALS Leere Felder kennzeichnen offene Kammern fuer Kontakte													

CODING C

0-1452303-3												
	1	2	3	4	5	6	7	8	9	10	11	12
WITH "X" MARKED INDICATE CLOSED LOCATIONS Markierte Felder mit "X" kennzeichnen geschlossene Kammern												
BLANKED CAVITIES INDICATE OPEN LOCATIONS FOR TERMINALS Leere Felder kennzeichnen offene Kammern fuer Kontakte												

-1 AS SHOWN
wie gezeichnet

1x		1x					PBT-GF20	MALE HSG. CODING B	green -	-
	1x		1x				PBT-GF20	MALE HSG. CODING A	black -	-
				1x			PBT-GF20	MALE HSG. CODING C	nature -	4
					1x		PBT-GF20	MALE HSG. CODING B	green -	3
1x	1x	1x	1x	1x	1x	1x	PBT-GF15	SPACER -	red -	2
						1x	PBT-GF20	MALE HSG. CODING A	black -	1
							MATERIAL	DESCRIPTION	CLOUR	ITEM NO
A	A	D	F	-	C	E	REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)			
18.3	18.3	18.3	18.3	-	18.3	18.3	WEIGHT OF EACH ASSY NO [g]			
4-1452303-1	3-1452303-1	2-1452303-1	1-1452303-1	0-1452303-3	0-1452303-2	0-1452303-1	TE ASSY PN			
B	A	B	A	C	B	A	CODING			
2-1452299-1	1-1452299-1	2-1452299-1	1-1452299-1	0-1452299-3	0-1452299-2	0-1452299-1	MATING COMPONENT TE ASSY PN			
							PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G.PUCKEL 160CT2001 CHK S.DENTER 160CT2001 APVD G.MUMPER 160CT2001		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±5		NAME 12 POS. INLINER TO REAR-BUMPER CON. ASSY MALE HOUSING	
		PRODUCT SPEC - APPLICATION SPEC 114-18487			
MATERIAL - -		FINISH - -			
		WEIGHT -		SIZE A2	
				CAGE CODE 00779	
				DRAWING NO C=1452303	
				RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 OF 1 REV G3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1452303-2](#)