

REV. 3
DCO 102710

| | |
|-----------------|----------------|
| COIL: @ 25°C | |
| RESISTANCE | 170 OHMS ± 10% |
| NOMINAL VOLTAGE | 18.0 VDC |
| MUST OPERATE | 9.7 VDC |
| MUST RELEASE | 1.15 VDC |


| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK | 50 g's 11 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: OPERATE & RELEASE 15 MS MAX.
OPERATE BOUNCE 5 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUST. OPL
CUST. NO. M5757/23-040 REV.

"07" RELAY

CUSTOMER DATA SHEET

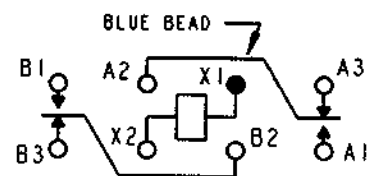

TERMINAL VIEW

| | |
|-----------------|---------------------------------|
| CONTACT RATING: | 10 AMPS 28 VDC |
| | 5 AMPS 115 VAC/400 Hz RESISTIVE |
| | 50,000 OPERATIONS |

DR. BSH 8/17/01

CK. TLG 8-17-01

CII Technologies
advanced control electronic solutions

B07D934BZ2-0356

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07D934BZ2-0356](#)