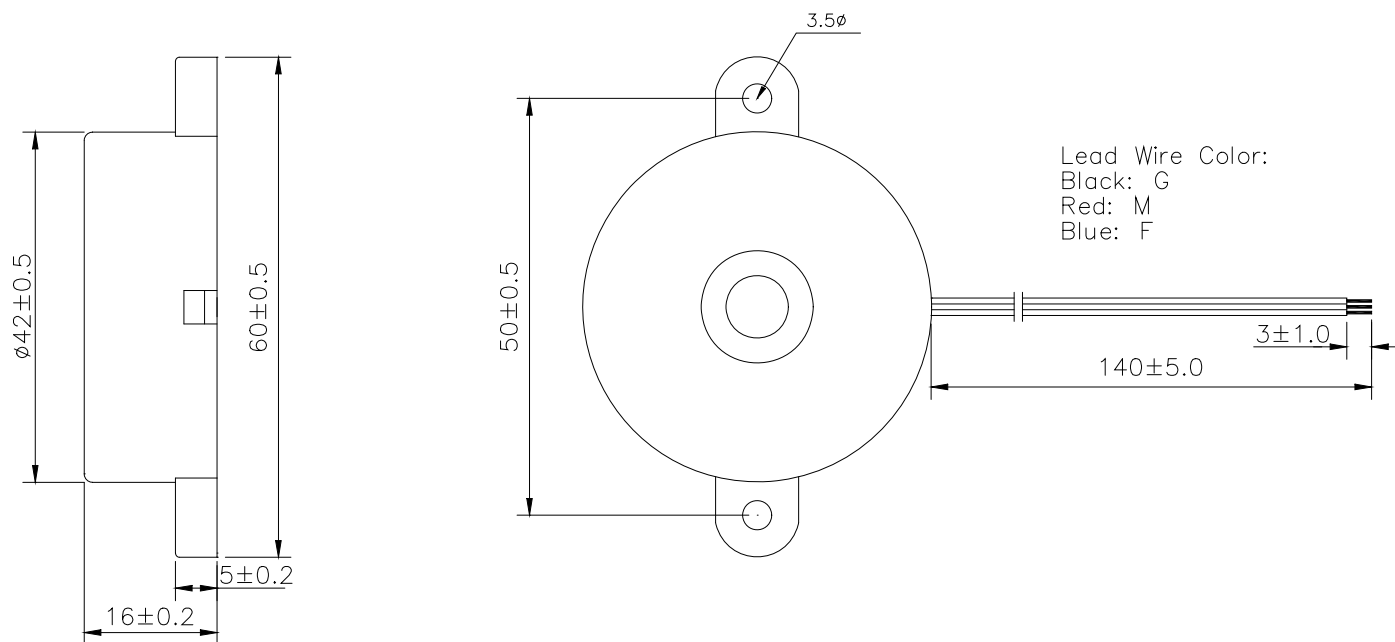


**Sales Outline Drawing****Specifications:**

|                               |                                                                     |
|-------------------------------|---------------------------------------------------------------------|
| Resonant Frequency (Hz)       | 2900 ± 500                                                          |
| Operating Voltage (Vdc)       | 3 ~ 28                                                              |
| Rated Voltage (Vdc)           | 12                                                                  |
| Current Consumption (mA/max)  | 8.0 at Rated Voltage                                                |
| Sound Pressure Level (dB/min) | 90 at 30cm at Rated voltage                                         |
| Operating Temperature (°C)    | -20 ~ +90                                                           |
| Storage Temperature (°C)      | -30 ~ +100                                                          |
| Housing                       | ABS 777D UL94HB plastic resin<br>(Color: Black)                     |
| Lead Wires                    | 28 AWG      M = Main (Ceramic);<br>F = Feedback; G = Ground (Metal) |
| Weight (Grams)                | 11.8                                                                |
| Options                       | For other options contact factory                                   |

**Dimensions:** (units: mm)**ROHS Compliant**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PT-3529FWQ](#)