
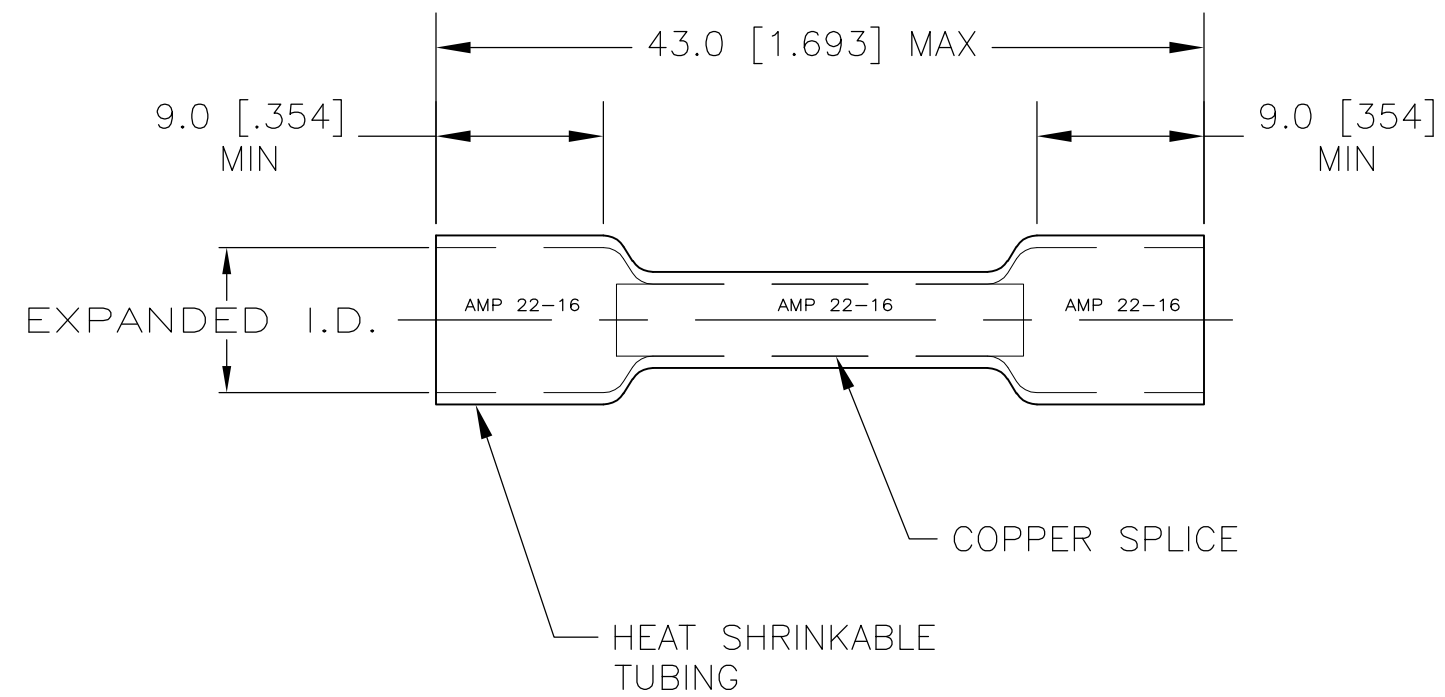


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
EY	25	P	LTR	DESCRIPTION	DATE	DWN	APVD
			N	REV PER ECR 07-027142	12NOV07	JR	TM

<b>AMP</b> WIRE RANGE	 Listed
22-16 AWG STRANDED	22-16 AWG STRANDED



- 1 TUBING MATERIAL; CROSS-LINKED POLYMER WITH MELT LINER; COLOR, RED; BLACK INK LEGEND 1/16 MIN; HEIGHT; ONE FULL APPEARANCE MIN.
- 2 TEMP RATING -65°F TO 257°F [-55°C TO 125°C ]
- 3 NO AGENCY APPROVALS, NEITHER UL OR CSA APPROVED.
- 4 SHIPPING WEIGHT .003 LBS EACH
- 5 VOLTAGE RATING: 600 V MAX ( 1000 V MAX FIXTURES & SIGNS )
- 6 MATERIAL & FINISH ; BODY - COPPER, TIN PLATED SLEEVE - NYLON
- 7 PRELIMINARY - NOT FOR PRODUCTION

3	ON TAPE, REEL	4.44 [.175]	1.65 [.065]	2500	7 2-603502-1
	LOOSE PIECE	4.44 [.175]	1.65 [.065]	1000	603502-3
	SMALL PACK	4.44 [.175]	1.65 [.065]	50/BOX	603502-2
	PACKAGE TYPE	EXPANDED I.D. MIN	RECOVERED I.D. MAX	QTY	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 24JUN04	Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: mm [INCHES]		CHK T MICHIELUTTI 24JUN04	NAME PRE-INSULATED SEALED SPLICE WIRE SIZE: 22-16 AWG		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.51 [.02] 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -		APVD T MICHIELUTTI 24JUN04	PRODUCT SPEC -		
MATERIAL - 6		FINISH - 6	APPLICATION SPEC -	SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING			DRAWING NO G-603502	RESTRICTED TO -	
			WEIGHT -	SCALE 1:1	SHEET 1 OF 1
				REV N	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[603502-3](#)