
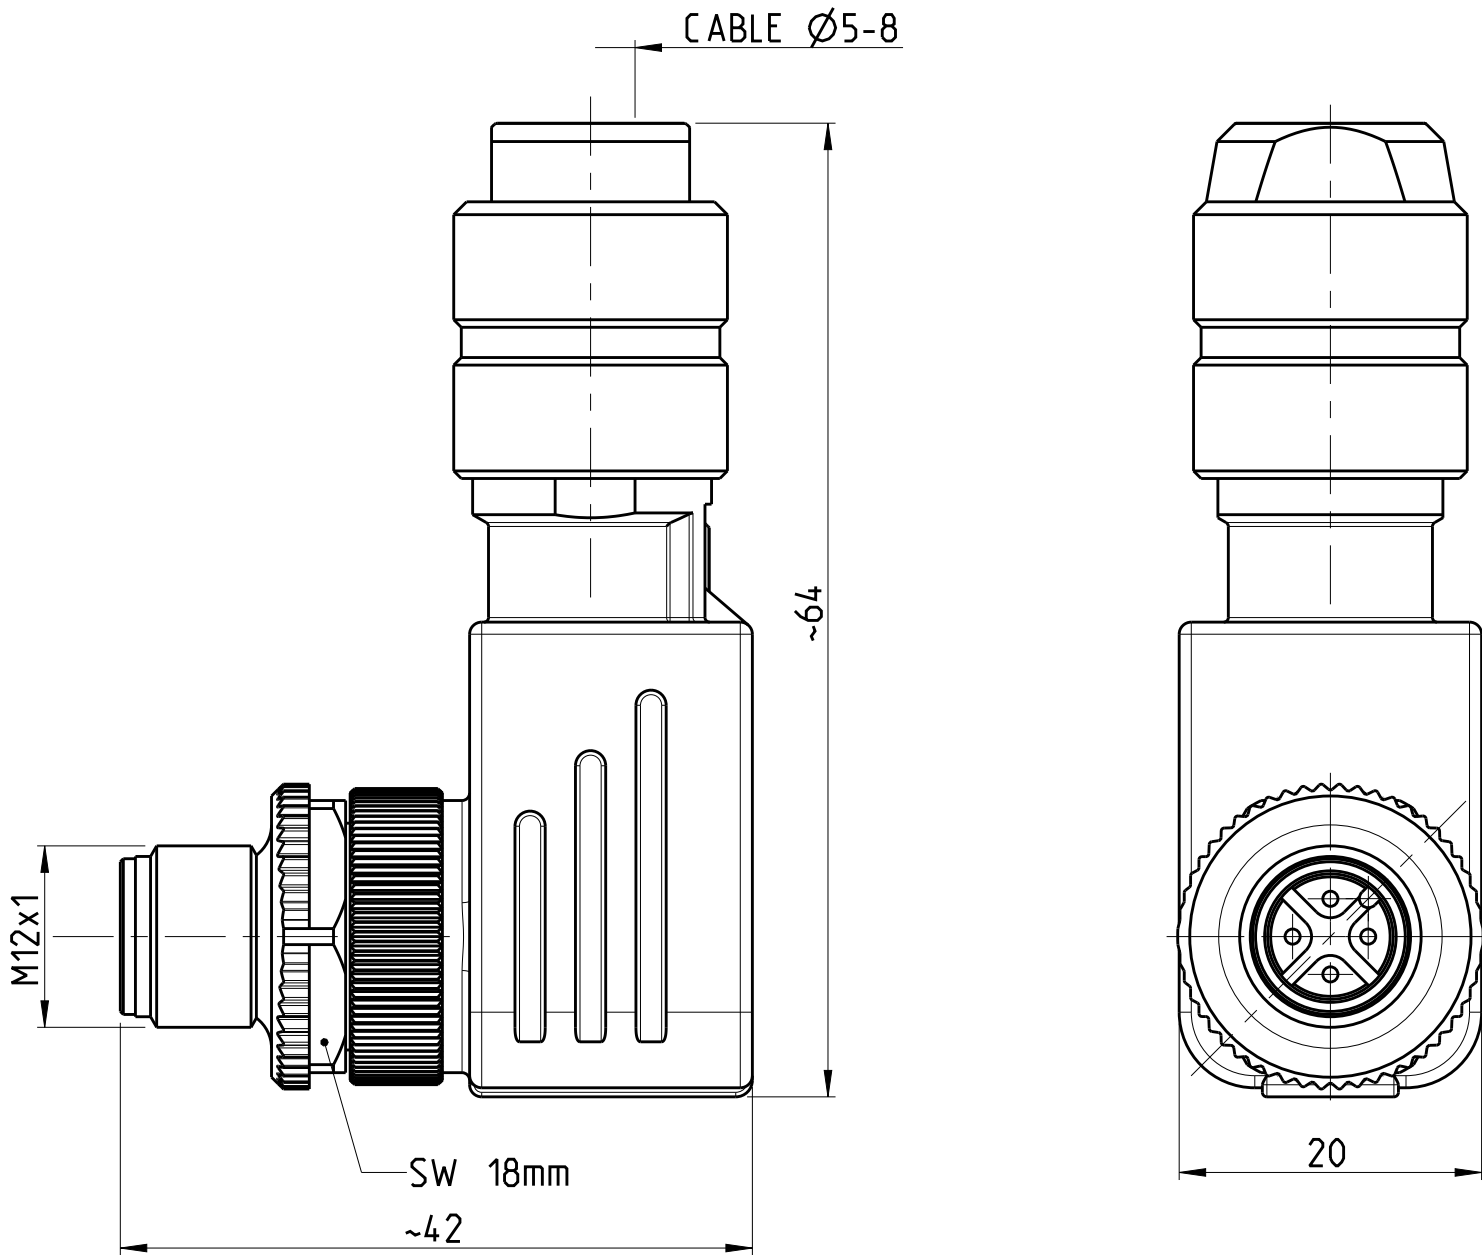


PROJECT NR.:		REVISIONS				
PRJ-14-000000805		AENDERUNGEN	DESCRIPTION	DATE	DWN	APVD
P	LTR	DESCRIPTION CORRECTED FROM SOLDER TO SCREW TERMINAL IN TITLE BLOCK				
	A2				CR	JK

- 1 MATERIAL: ITEM NO. 1: HOUSING - ZINC DIECASTING, NICKEL PLATED
ITEM NO. 2: CONTACT BODY - PA
ITEM NO. 3: CONTACT - CuZn (brass)
CONTACT FINISH - Au (Gold)
- 2 ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED
- 3 MEASUREMENT REFERENCE ONLY
- 4 PACKAGING: 1 PIECE IN A BAG

TECHNICAL DATA	3-2271123-2	4-2271123-2	5-2271123-2	6-2271123-2
RATED VOLTAGE	250V	125V	60V	30V
RATED IMPULSE VOLTAGE	2500V	1500V	800V	500V
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
RATED CURRENT	4A	4A	2A	2A
VOLUME RESISTIVITY	≤ 3mΩ	≤ 3mΩ	≤ 3mΩ	≤ 3mΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
UPPER TEMPERATURE	+85 °C	+85 °C	+85 °C	+85 °C
LOWER TEMPERATURE	-40 °C	-40 °C	-40 °C	-40 °C

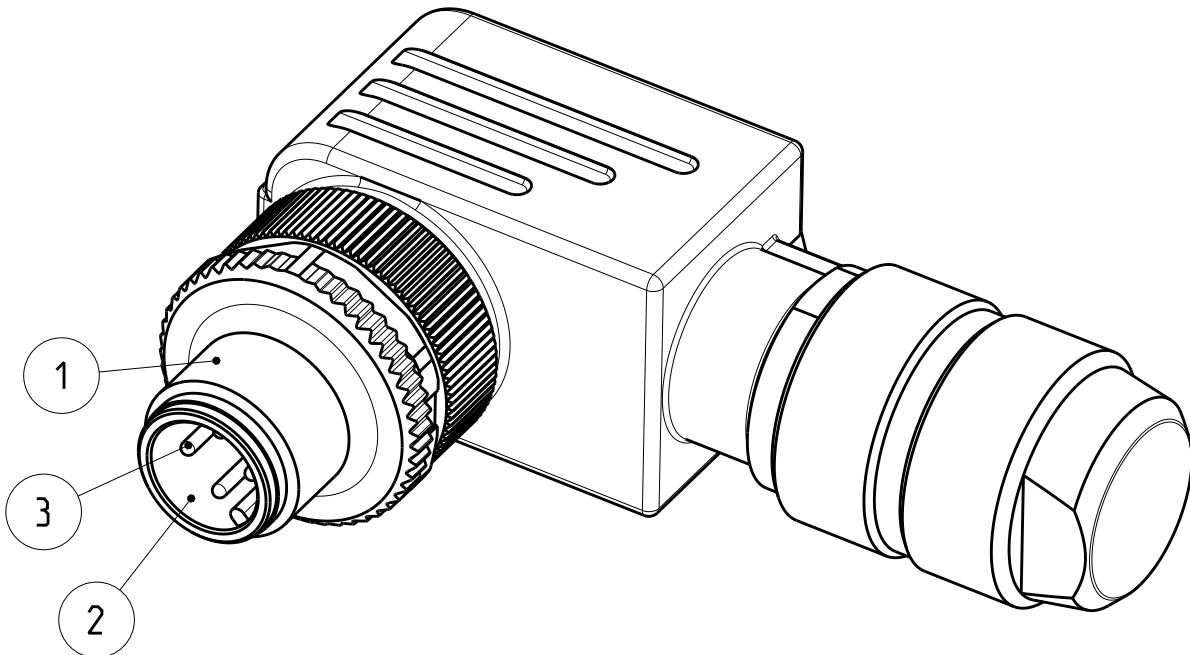

PIN ARRANGEMENT
A-CODING

3-2271123-2	4-2271123-2	5-2271123-2	6-2271123-2

SIZE ISO 14405 ⑤

3-2 AS SHOWN
WIE GEZEICHNET

6-8	24 / 0.25mm ²	⚠	12	6-2271123-2
5-8	20 / 0.50mm ²	⚠	8	5-2271123-2
5-8	18 / 0.75mm ²	⚠	5	4-2271123-2
5-8	18 / 0.75mm ²	⚠	4	3-2271123-2
CABLE FEED-THROUGH mm	WIRES AWG / mm ²	MATERIAL	NUMBER OF POLES	TE-PART-NO.

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).		DWN YASHKUMAR 19MAY2014 CHK M.STRELOW 19MAY2014 APVD C.SCHREITLINGER 19MAY2014		NAME M12 MALE 90 DEG ANGLED FIELD INSTALLABLE, SHIELDED CONNECTOR SCREW TERMINAL, A-CODING	
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		PRODUCT SPEC 108-19483 APPLICATION SPEC 114-32127		SIZE A2 CAGE CODE 00779 DRAWING NO. C-2271123	
DIMENSIONS: MASSEINHEITEN: IT(M)		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		RESTRICTED TO NUR FÜR	
MATERIAL		WEIGHT GEWICHT		SHEET 1 OF 1	
Customer Drawing		/KUNDENZEICHNUNG		REV A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-2271123-2](#)