


- 1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS
- 2 AVAILABLE IN 2 DIFFERENT SERIES
- 3 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR

Technical drawing of a rectangular plate. The drawing shows a side view of the plate with a central horizontal slot. The slot is defined by two parallel lines, with the upper line having a small semi-circular notch. The plate has a uniform thickness. Dimension A is indicated by a vertical double-headed arrow on the left side, representing the height of the plate. Dimension B is indicated by a horizontal double-headed arrow at the top, representing the width of the plate.

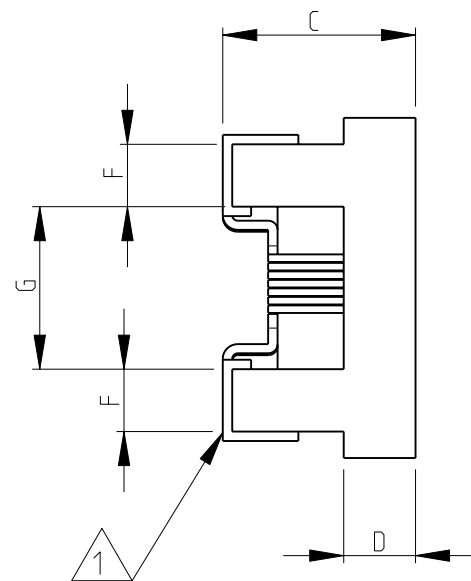


RoHS Compliant

The diagram shows a rectangular cross-section of a beam. The width is labeled H and the height is labeled K . The cross-section is filled with a cross-hatched pattern, indicating a specific material or reinforcement. The beam is shown in a perspective view, with the cross-section being the front face.

36501E	1.27	0.76	0.61	0.15	0.23	0.56	0.66	0.50	0.46
36501J	1.80	1.12	1.02	0.38	0.33	0.86	1.02	0.64	0.64
SERIES	A MAX.	B MAX.	C MAX.	D REF.	F	G	H	K	J

DWN	SUBHASH.M	14-NOV-08
CHK	PRAKASH.S	14-NOV-08
APVD	STEPHEN.P	14-NOV-08

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
		0 PLC	± 0.2
		1 PLC	± 0.1
		2 PLC	$\pm -$
		3 PLC	$\pm -$
		4 PLC	$\pm -$
		ANGLES	$\pm 5^{\circ}$
MATERIAL		FINISH	
-		-	

TE Connectivity

NAME LOW INDUCTANCE,
HIGH FREQUENCY CHIP
INDUCTOR SERIES 3650

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A 3	00779	C- 1624112	-

CUSTOMER DRAWING

SCALE	20:1	SHEET	1 OF 1	REV	BA1
-------	------	-------	--------	-----	-----

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1624112-5](#)