

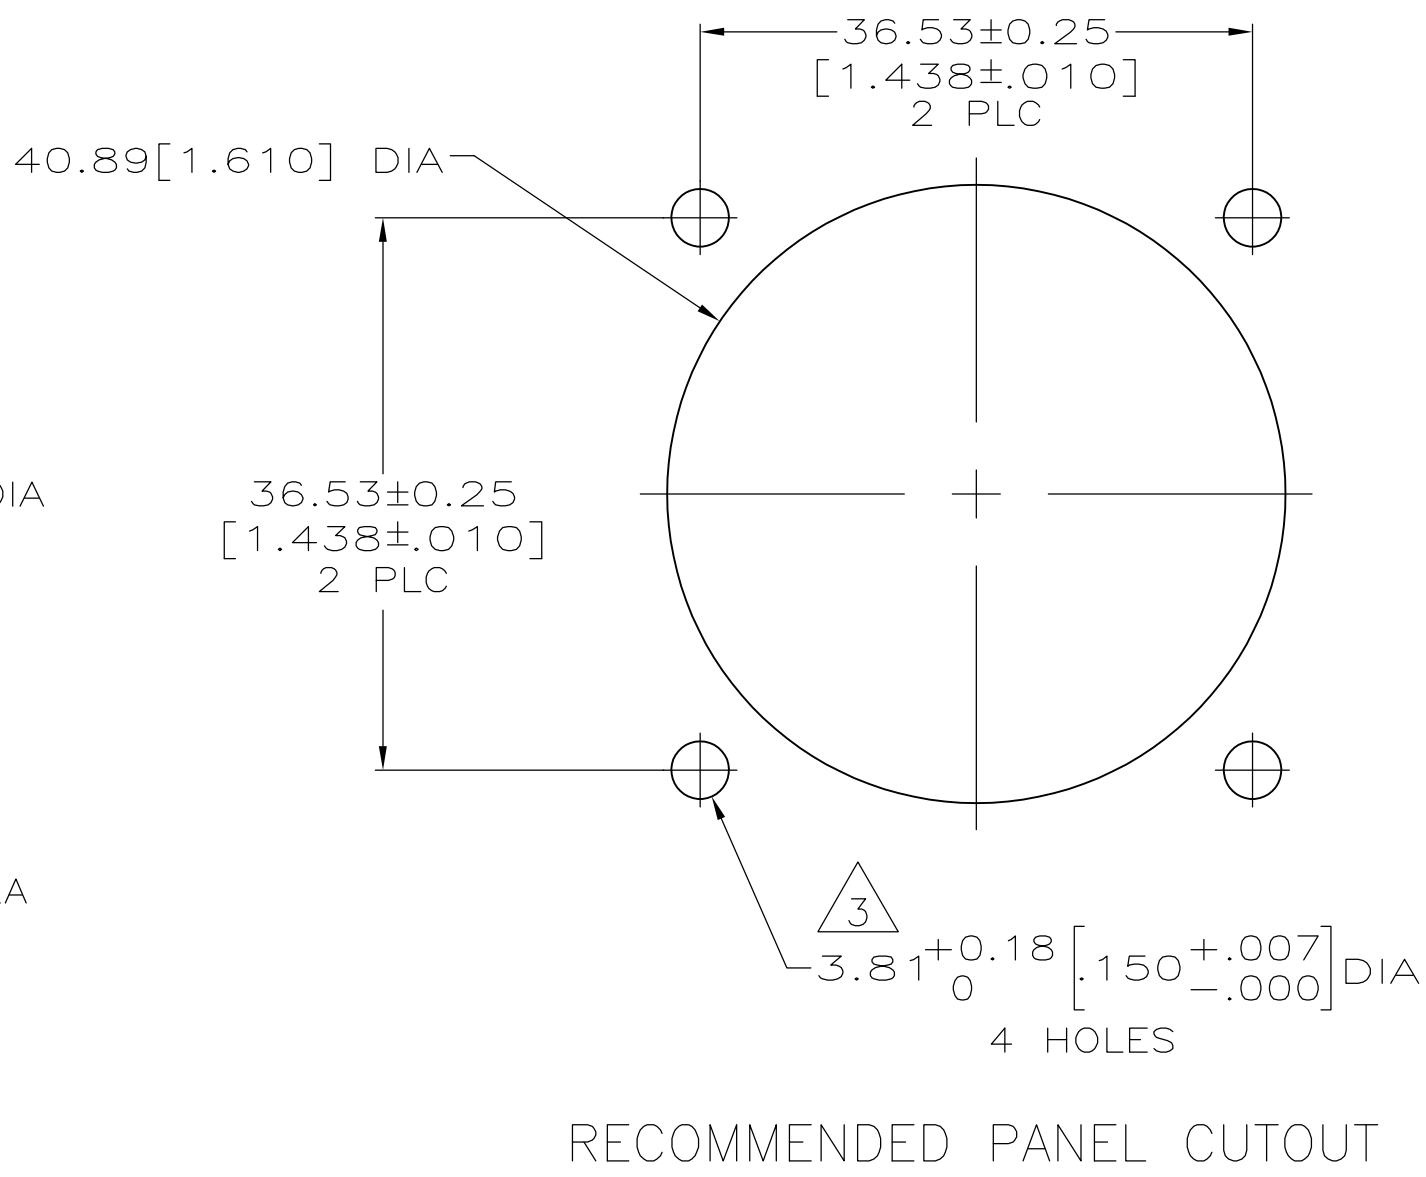
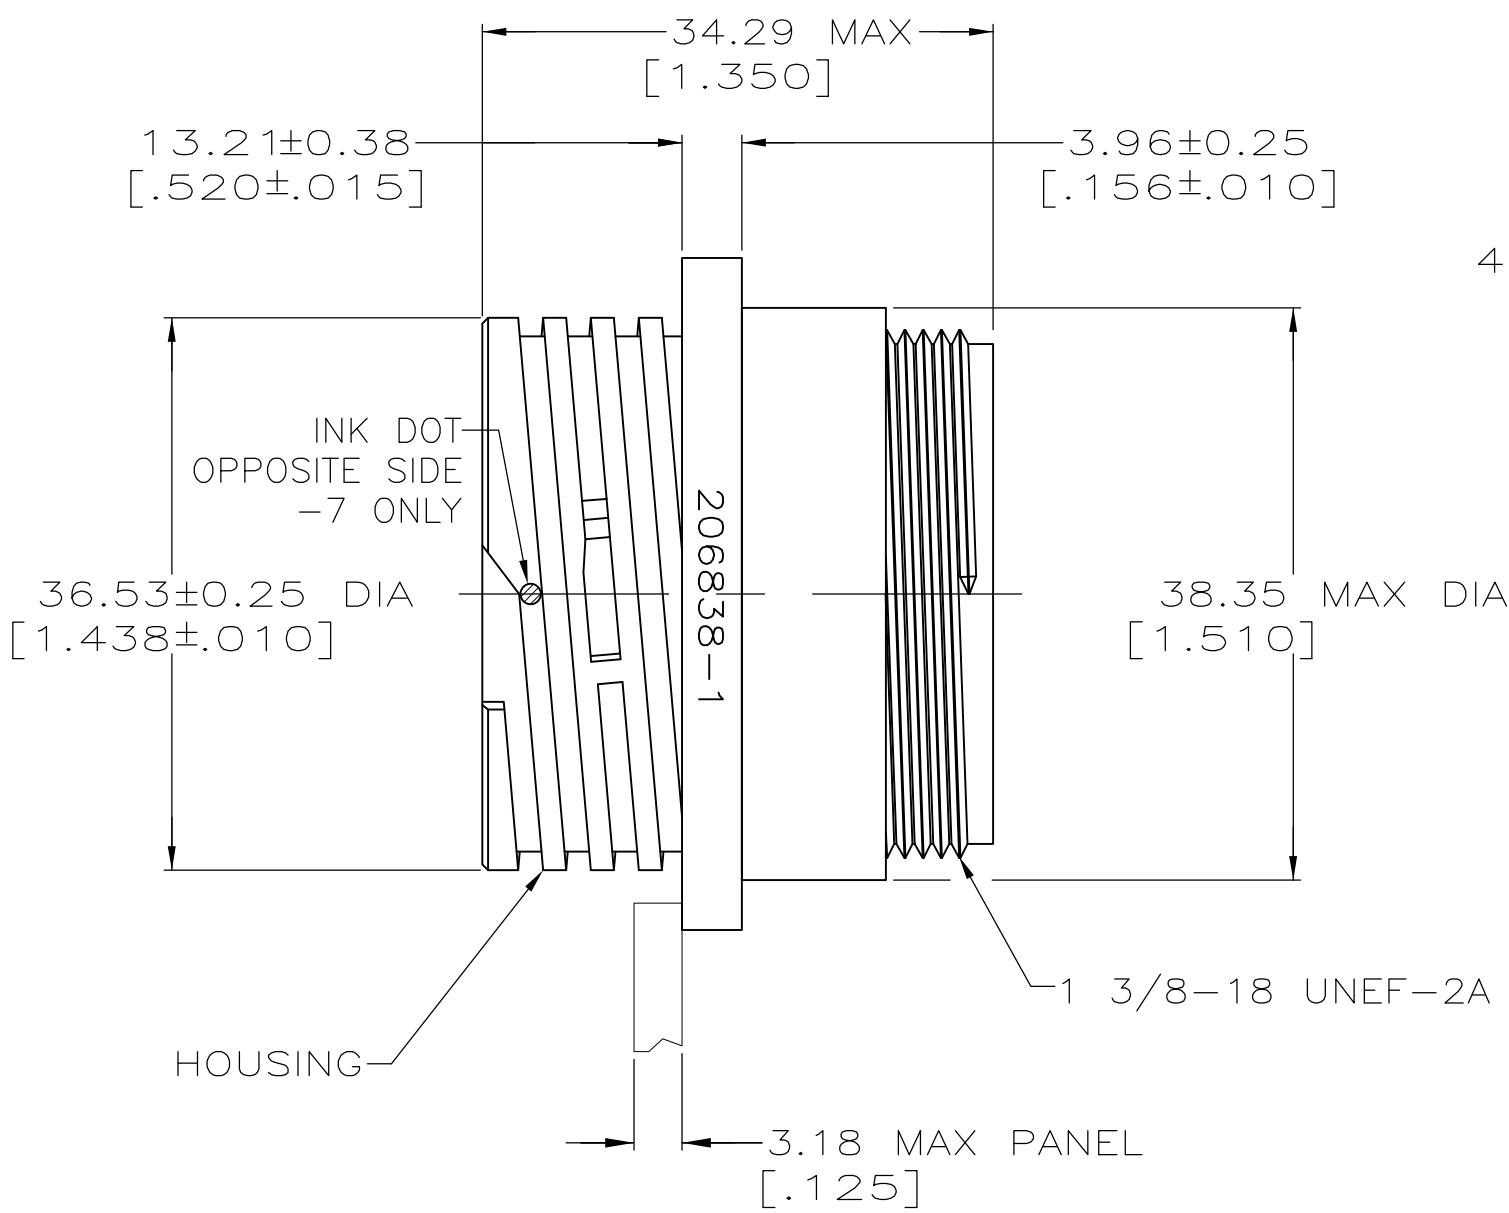
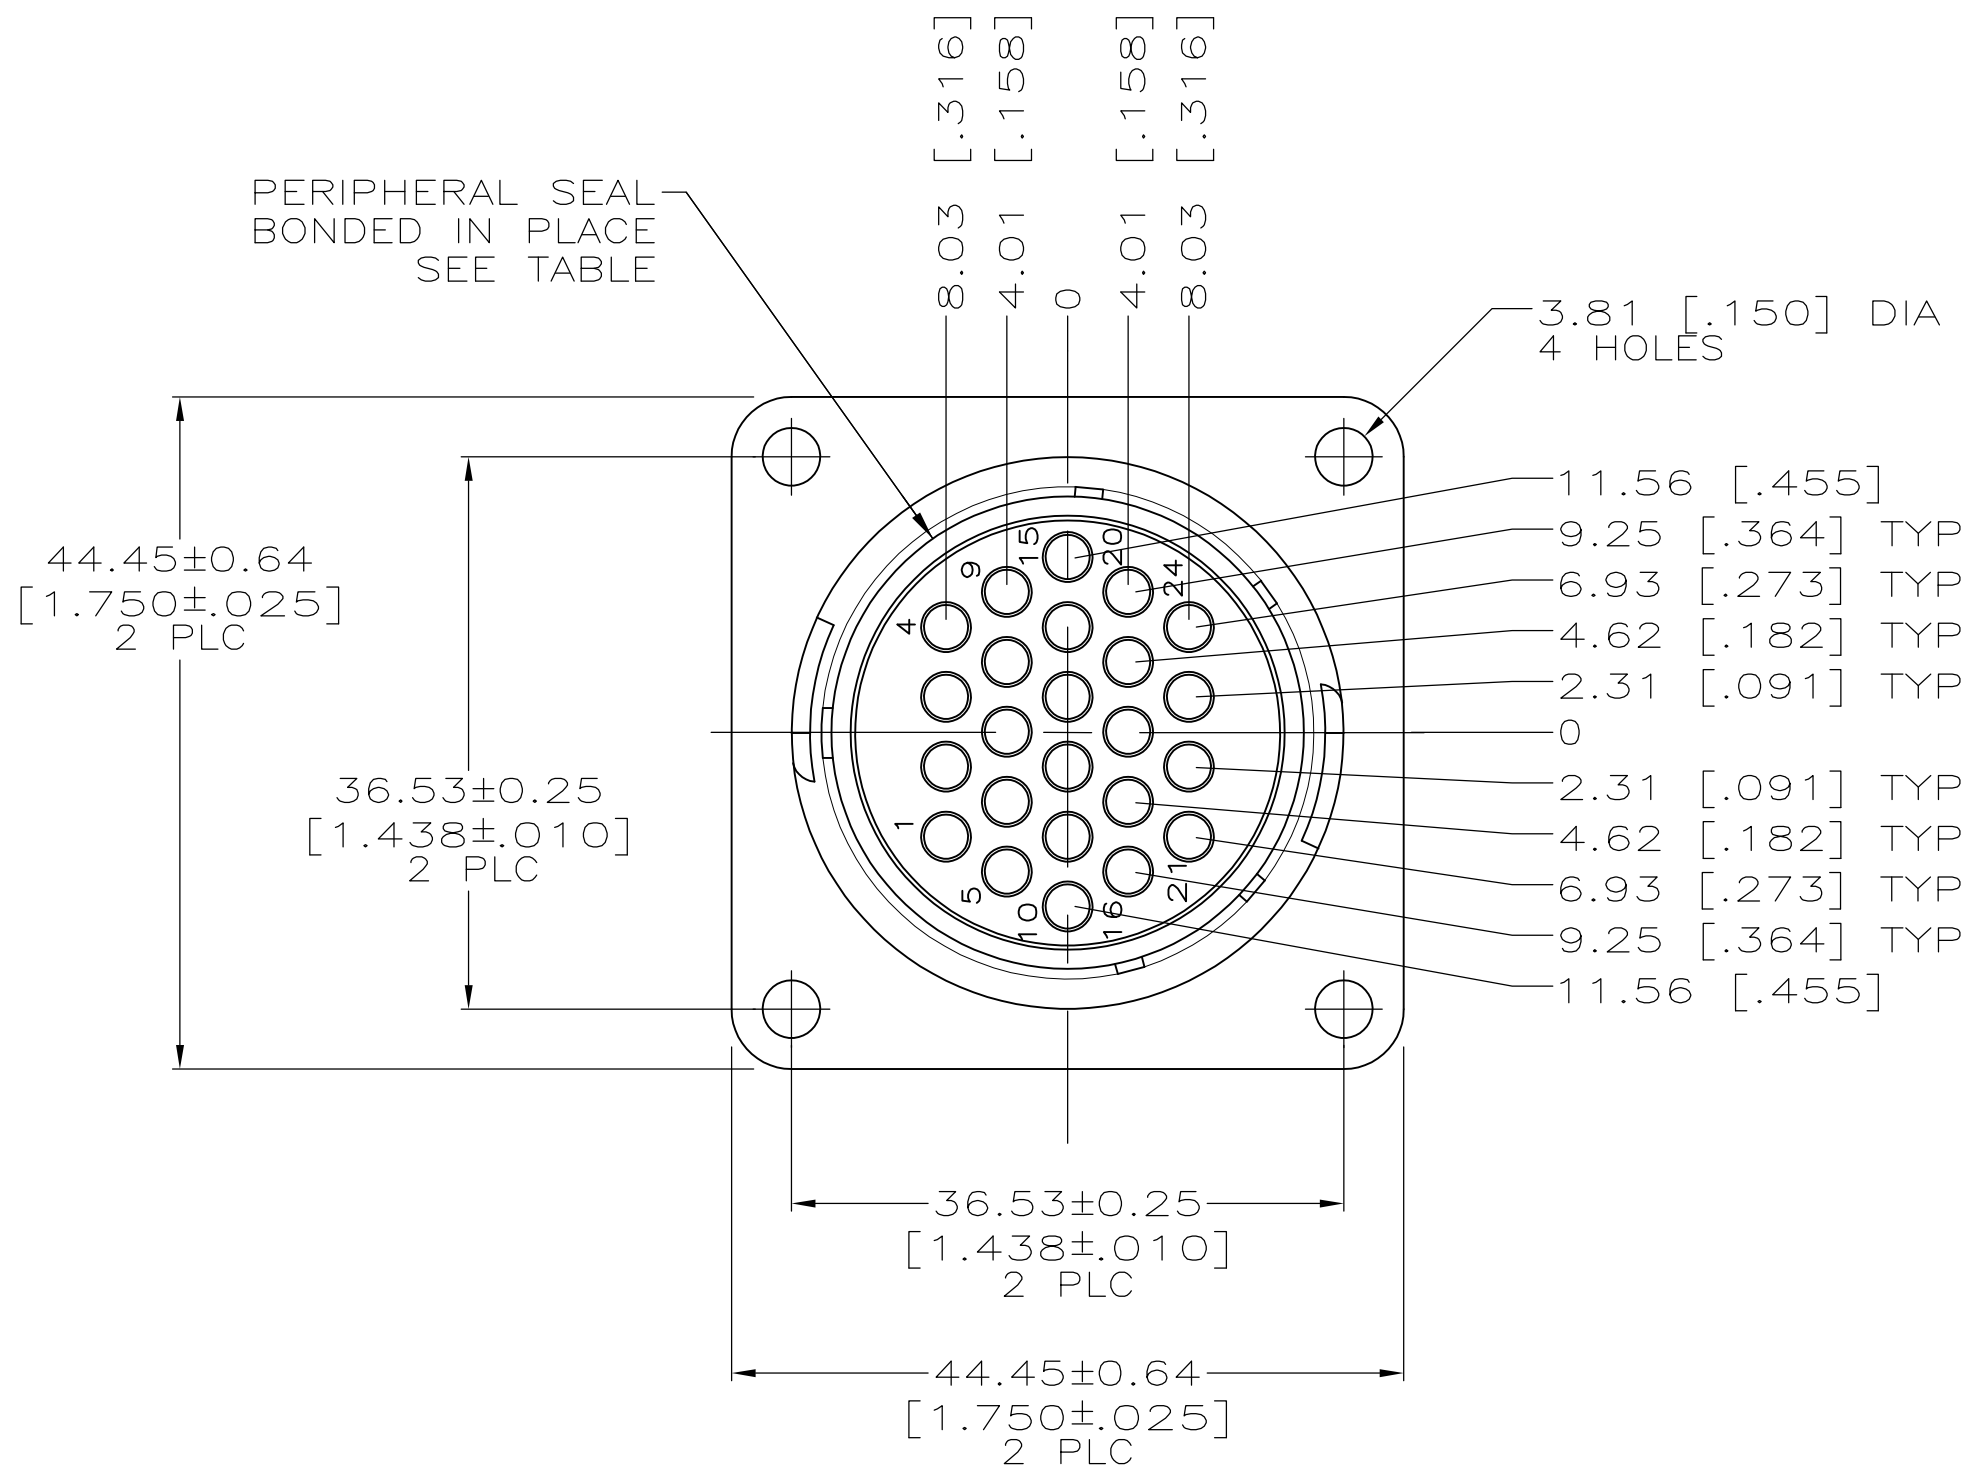


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L1	REVISED PER ECO-16-004800	10SEP2016	NK	MZ
	M	REVISED PER ECR-16-017870	20APR2017	BDA	MZ

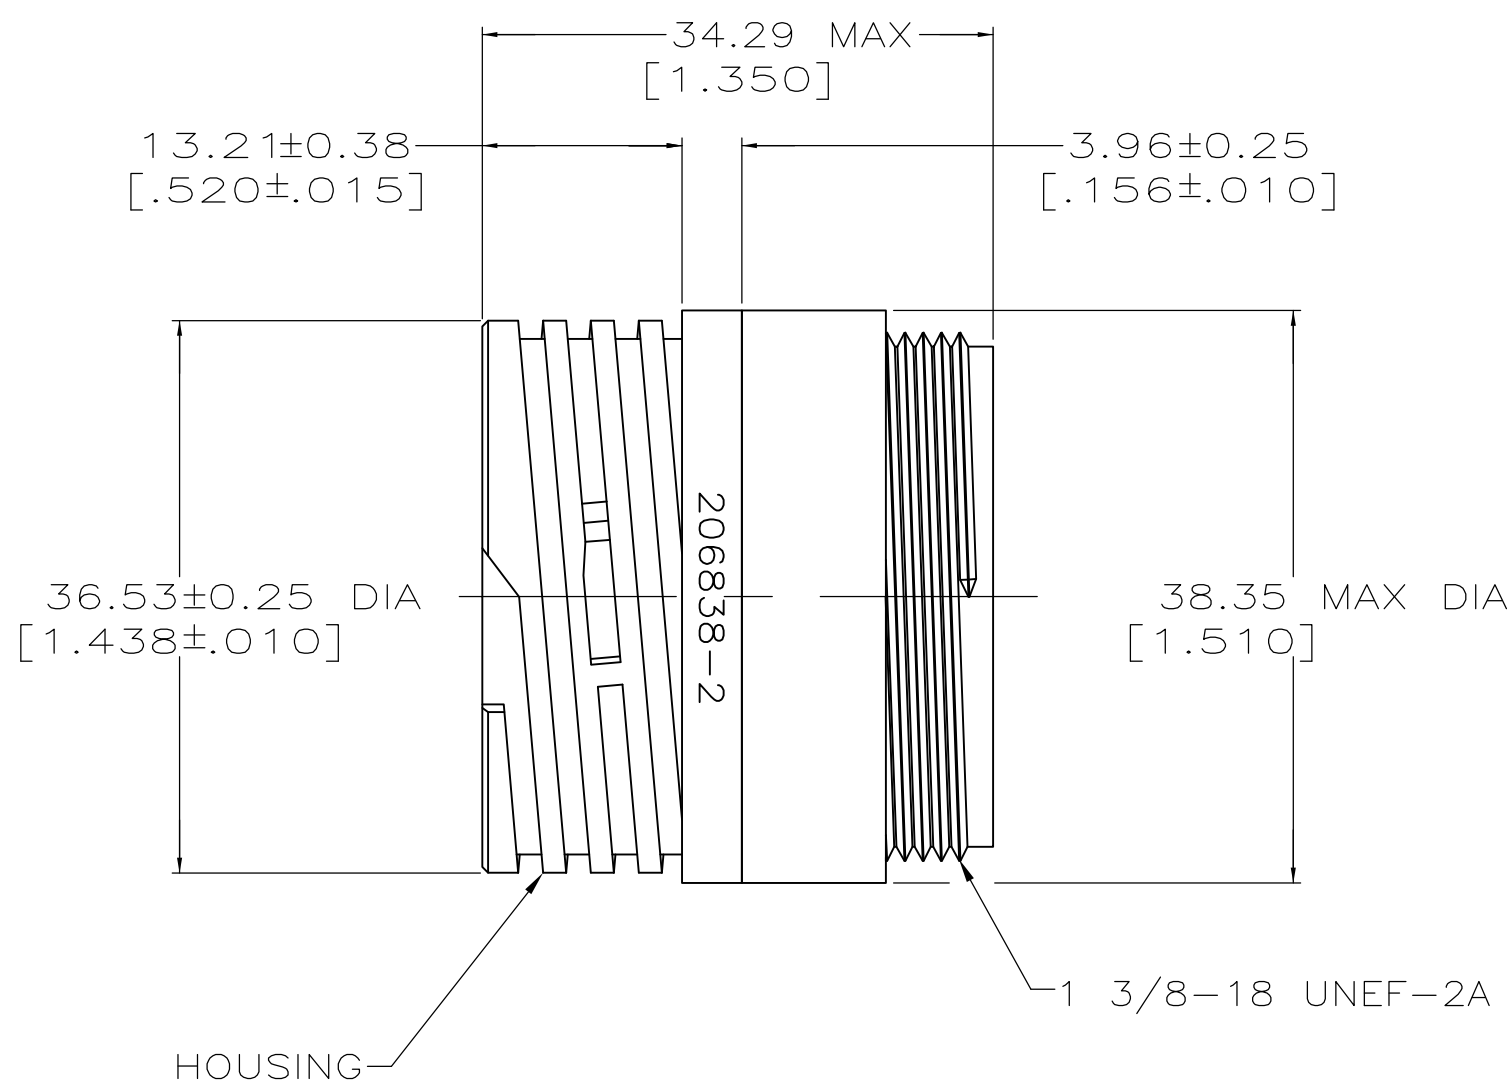


DETAIL A

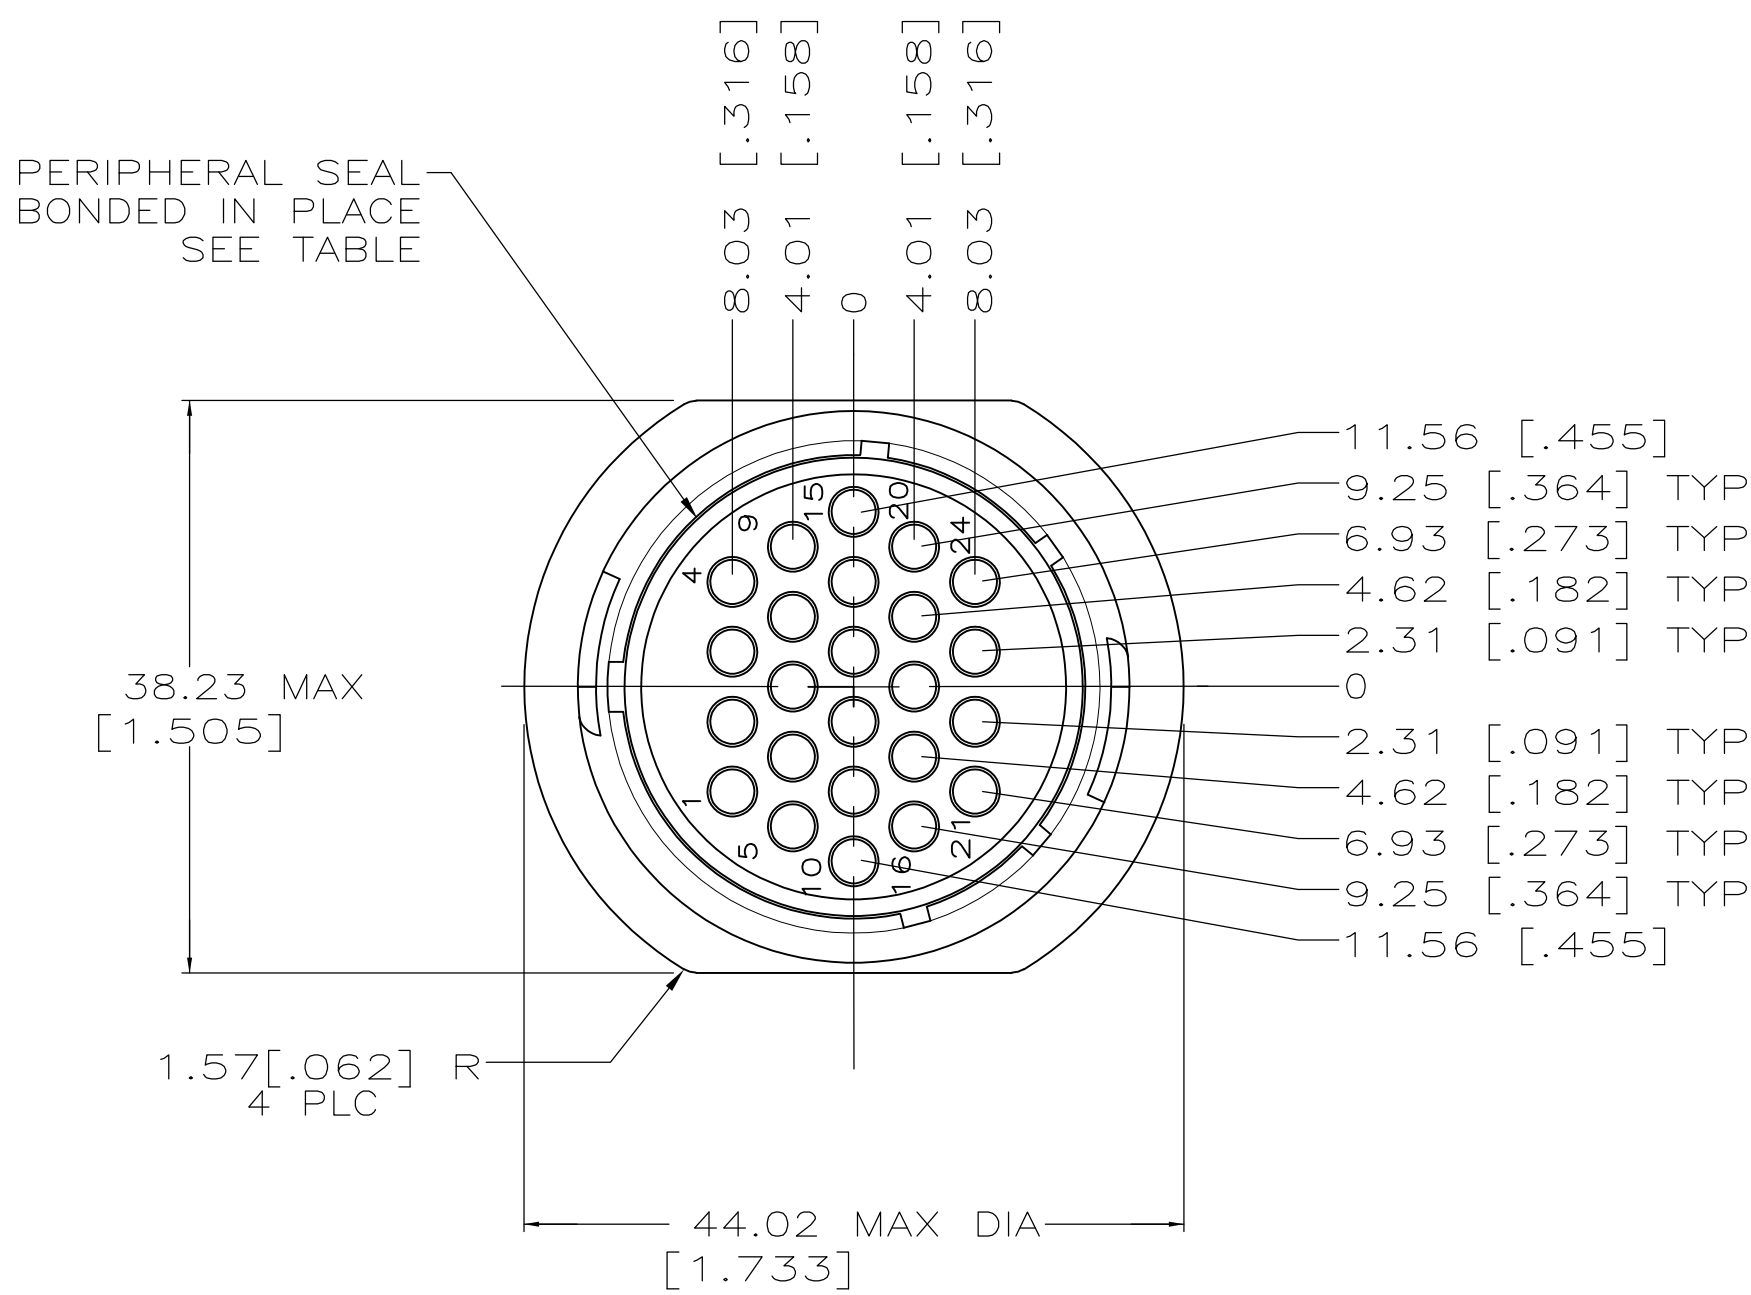

DETAIL B

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 WILL ACCEPT (24) MULTIMATE PIN CONTACTS.
- 3 NO 4 FASTENER RECOMMENDED FOR MOUNTING.
- 4 MAXIMUM INSULATION NOT TO EXCEED .150 DIA.
- 5 WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

△ OBSOLETE	STANDARD	YES	A	206838-8
OBSOLETE	STANDARD	YES	A	206838-7
OBSOLETE	SMALL PACK	NO	A	206838-5
	STANDARD	YES	B	206838-4
	STANDARD	YES	A	206838-3
	STANDARD	NO	B	206838-2
	STANDARD	NO	A	206838-1
	PACKAGING	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.GELTZ 10/29/92	 TE Connectivity	
		CHK R.STONE 08/11/93		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME	
		PRODUCT SPEC 108-10024	RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 23, CPC	
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
		WEIGHT	A1 00779 C=206838	
MATERIAL HOUSING: NYLON, BLACK		CUSTOMER DRAWING		
		RESTRICTED TO		
		SCALE 2:1 SHEET 1 OF 1 REV M		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[206838-8](#)