


Slotted Optical Switch

OPB820, OPB821Z, OPB821S_Z



Features:

- Non-contact switching
- Four standard aperture sizes for high resolution
- Low profile
- 0.080" (2.03 mm) wide, 0.250" (8.89 mm) deep slot
- Choice of PCBoard or wire mountings



Description:

Each OPB820 and OPB821Z device consists of an infrared emitting diode (LED, 890 nm center wavelength) and a NPN silicon phototransistor mounted in a low-cost black plastic housing on opposite sides of an 0.080" (2.03 mm) wide slot. Each device in this series has a 0.040" (1.02 mm) wide aperture located in front of the infrared diode. Phototransistor switching occurs when an opaque object passes through the slot.

Devices are offered with 0.275" (6.96 mm) lead spacing for PCBoard mounting (OPB820) or 24" (609 mm) 26 AWG wire leads (OPB821Z).

Applications:

- Non-contact object sensing
- Assembly line automation
- Machine automation
- Equipment safety
- Machine safety

Ordering Information							
Part Number	LED Peak Wavelength	Sensor	Slot Width / Depth	Aperture Emitter/Sensor	Lead Length / Spacing		
OPB820	890 nm	Transistor	0.080" / 0.255"	0.04" / 0.04"	0.425" / 0.275"		
OPB820S10				0.04" / 0.01"			
OPB820S5				0.04" / 0.005"			
OPB820S3				0.04" / 0.003"			
OPB821Z						0.040" / 0.040"	24"/26 AWG Wire
OPB821S10Z				0.040" / 0.010"			
OPB821S5Z				0.040" / 0.005"			
OPB821S3Z				0.040" / 0.003"			

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Slotted Optical Switch

OPB820, OPB821Z, OPB821S_Z



Electrical Specifications

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Storage and Operating Temperature	-40°C to +85°C
Lead Soldering Temperature (1/16 inch [1.6 mm] from case for 5 seconds with soldering iron) ⁽¹⁾	260°C

Input Diode

Continuous Forward Current	50 mA
Peak Forward Current (1µs pulse width, 300 pps)	1 A
Reverse Voltage	2 V
Power Dissipation ⁽²⁾	100 mW

Output Phototransistor

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Power Dissipation ⁽²⁾	100 mW

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) For OPB820, derate linearly 1.67 mW/°C above 25° C. For OPB821Z, derate linearly 1.82 mW/°C above 25° C.
- (3) Methanol or isopropanol are recommended as cleaning agents. Plastic housing is soluble in chlorinated hydrocarbons and ketones.

Electrical Characteristics ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input Diode (See OP245 for additional information)

V_F	Forward Voltage	-	-	1.7	V	$I_F = 20 \text{ mA}$
I_R	Reverse Current	-	-	100	µA	$V_R = 2 \text{ V}$

Output Phototransistor (See OP555 for additional information)

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	30	-	-	V	$I_C = 100 \text{ mA}$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5	-	-	V	$I_E = 100 \text{ µA}$
I_{CEO}	Collector-Emitter Dark Current	-	-	100	nA	$V_{CE} = 10 \text{ V}, I_F = 0, I_E = 0$

Coupled

$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	-	-	-	-	-
	OPB820, OPB821Z	-	-	0.4	V	$I_C = 250 \text{ µA}, I_F = 20 \text{ mA}$
	OPB820S3, OPB821S3Z	-	-	0.4	V	$I_C = 40 \text{ µA}, I_F = 20 \text{ mA}$
	OPB820S5, OPB821S5Z	-	-	0.4	V	$I_C = 150 \text{ µA}, I_F = 20 \text{ mA}$
$I_{C(ON)}$	On-State Collector Current	-	-	-	-	-
	OPB820, OPB821Z	500	-	-	µA	$V_{CE} = 5 \text{ V}, I_F = 20 \text{ mA}$
	OPB820S3, OPB821S3Z	60	-	-	µA	$V_{CE} = 5 \text{ V}, I_F = 20 \text{ mA}$
	OPB820S5, OPB821S5Z	300	-	-	µA	$V_{CE} = 5 \text{ V}, I_F = 20 \text{ mA}$
	OPB820S10, OPB821S10Z	400	-	-	µA	$V_{CE} = 5 \text{ V}, I_F = 20 \text{ mA}$

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.





TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Slotted Optical Switch

OPB820, OPB821Z, OPB821S_Z



Performance

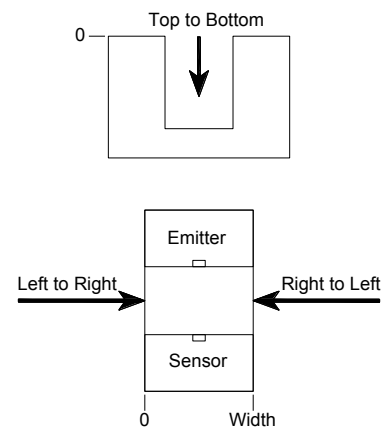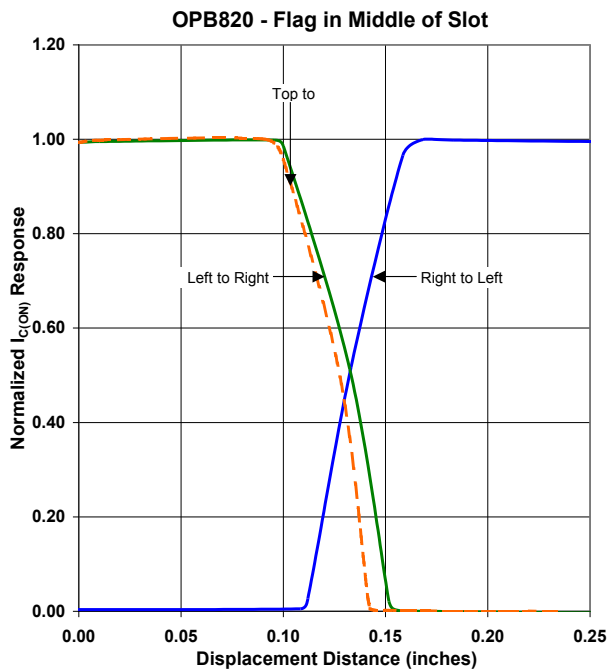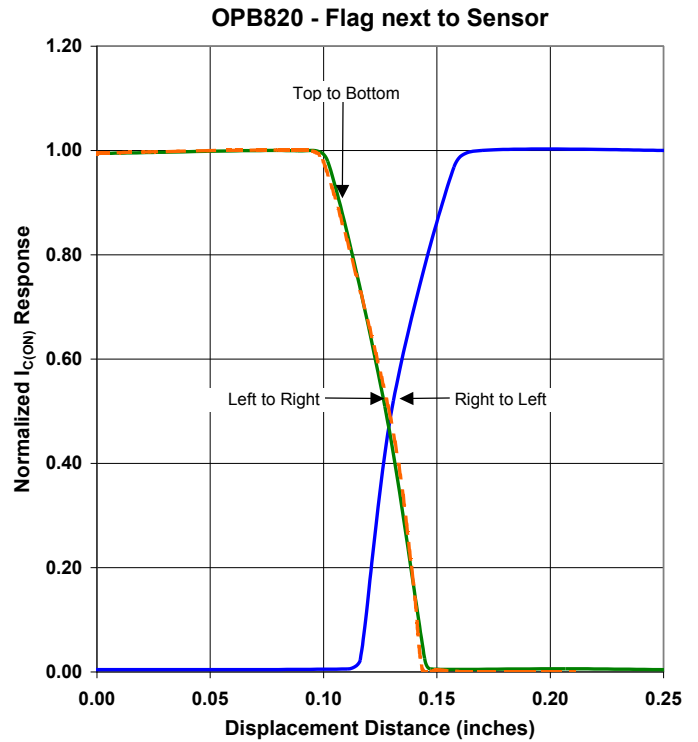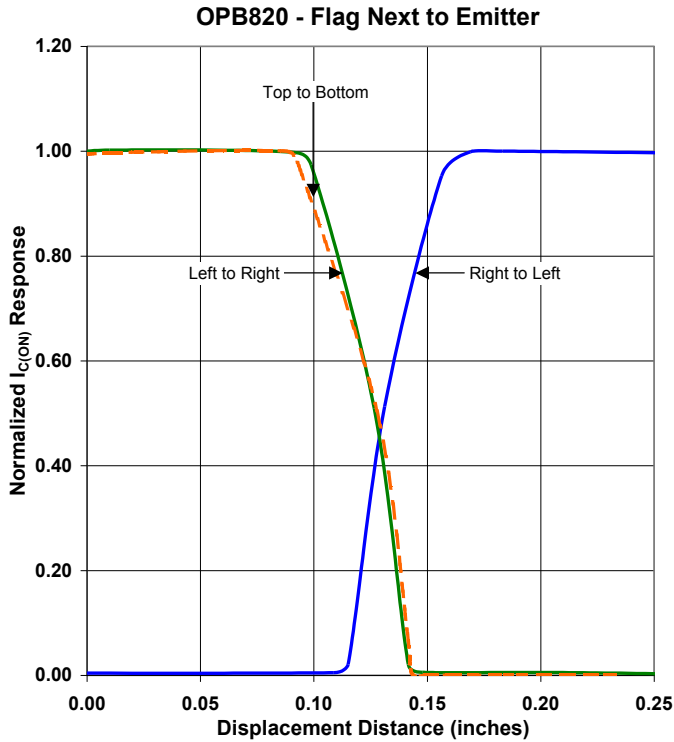

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.





TT Electronics | Optek Technology, Inc.
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Slotted Optical Switch

OPB820, OPB821Z, OPB821S_Z



Performance

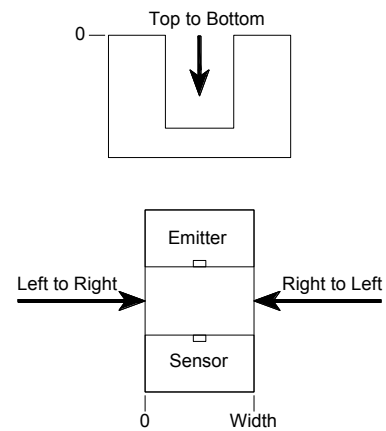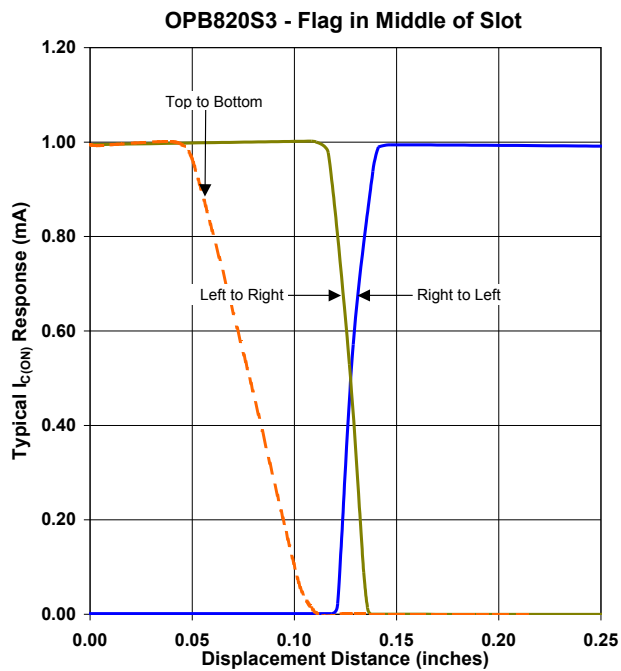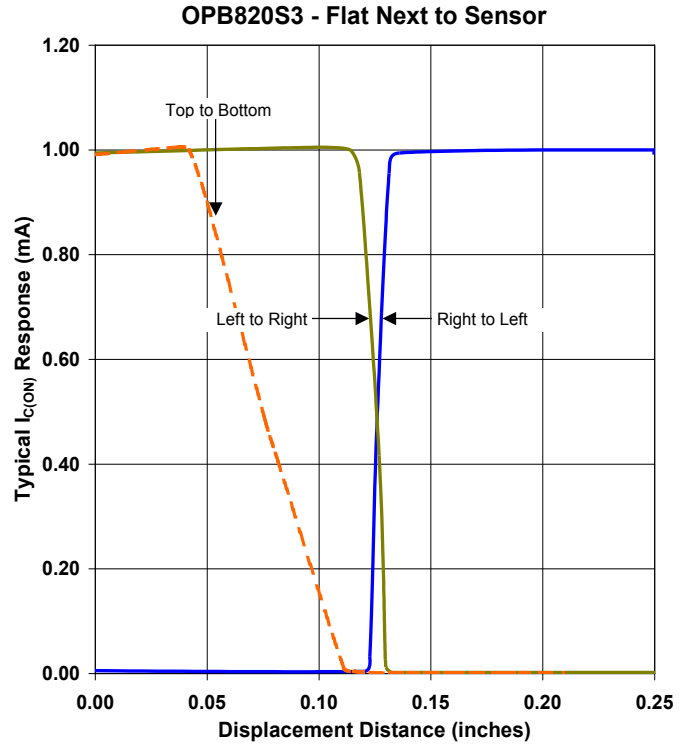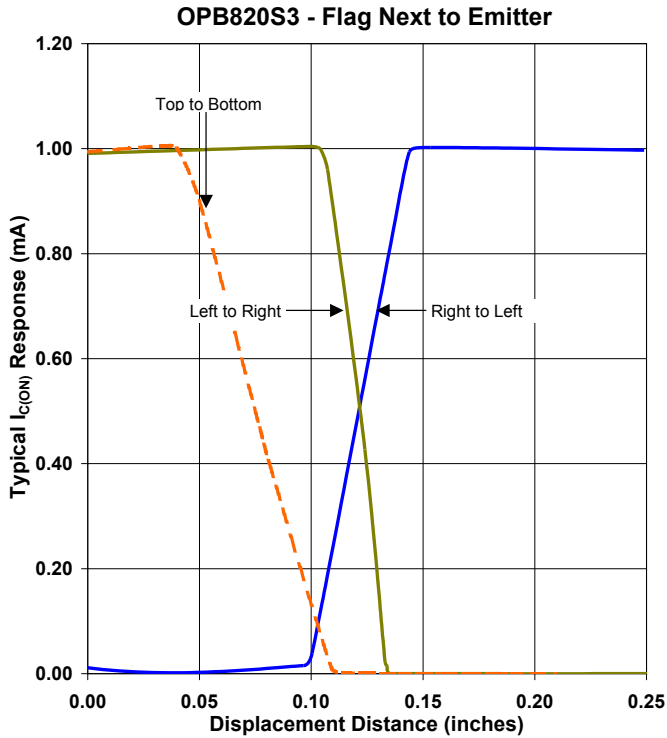

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.





TT Electronics | Optek Technology, Inc.
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Slotted Optical Switch

OPB820, OPB821Z, OPB821S_Z



Performance

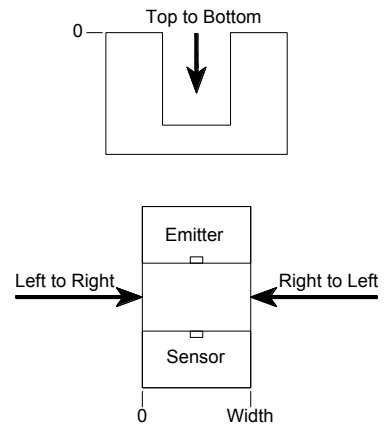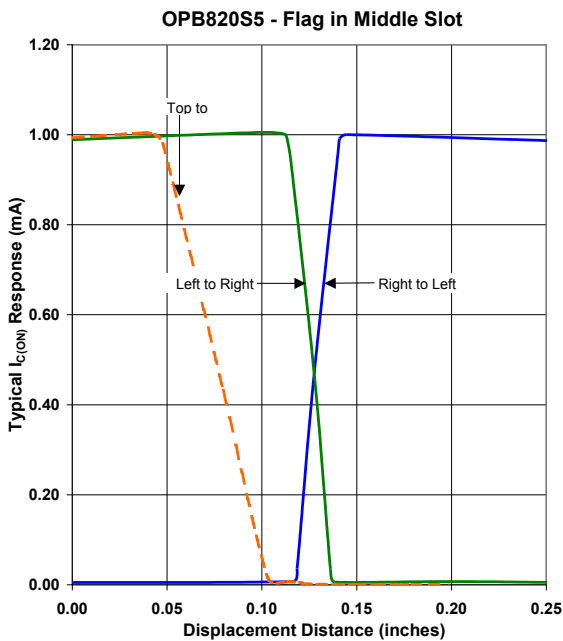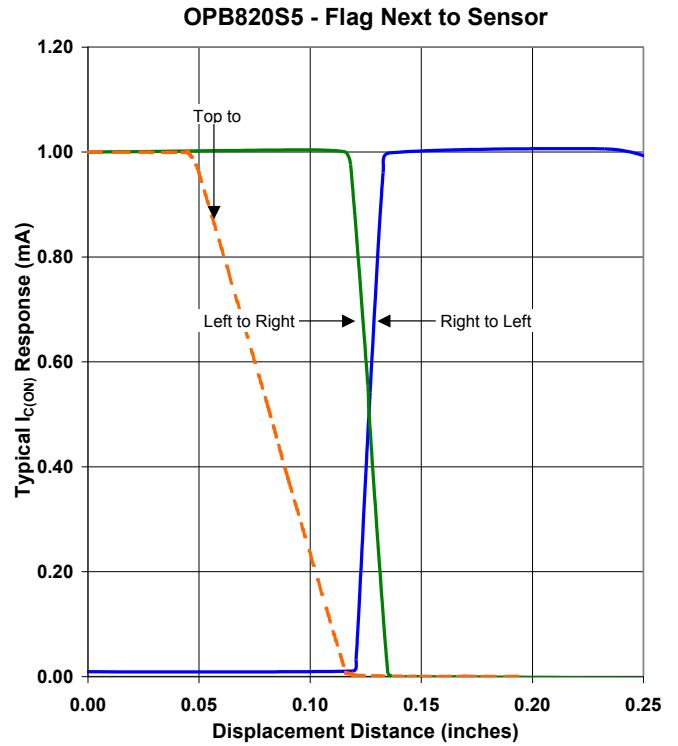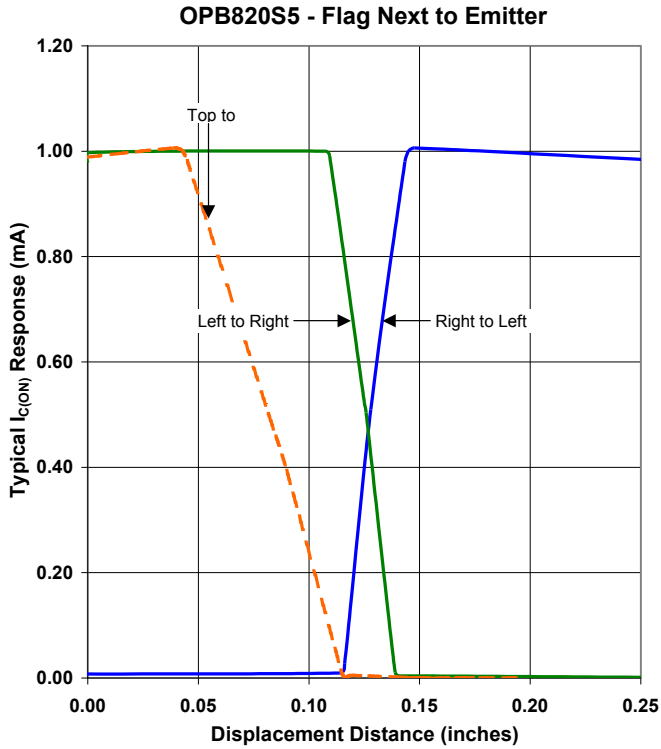

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com


Slotted Optical Switch

OPB820, OPB821Z, OPB821S_Z




Performance



OPB820S10 - Flag Next to Emitter

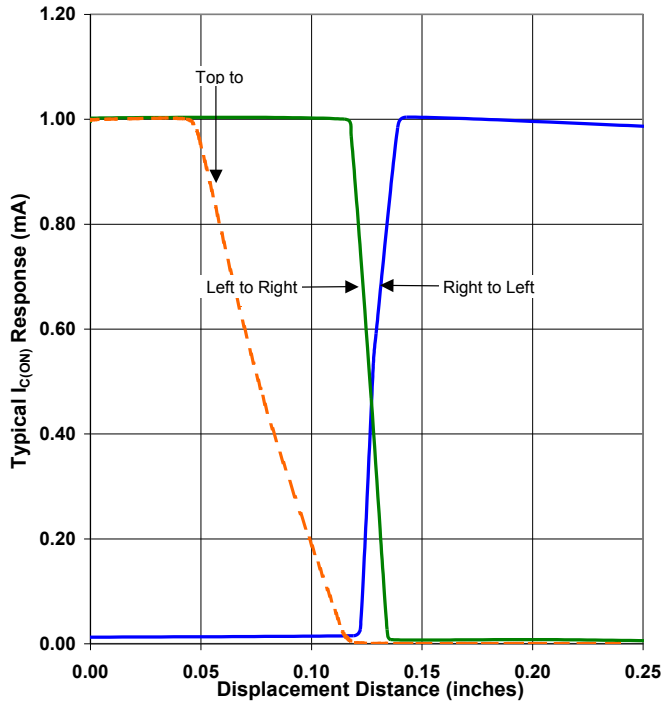

OPB820S10 - Flag Next to Sensor

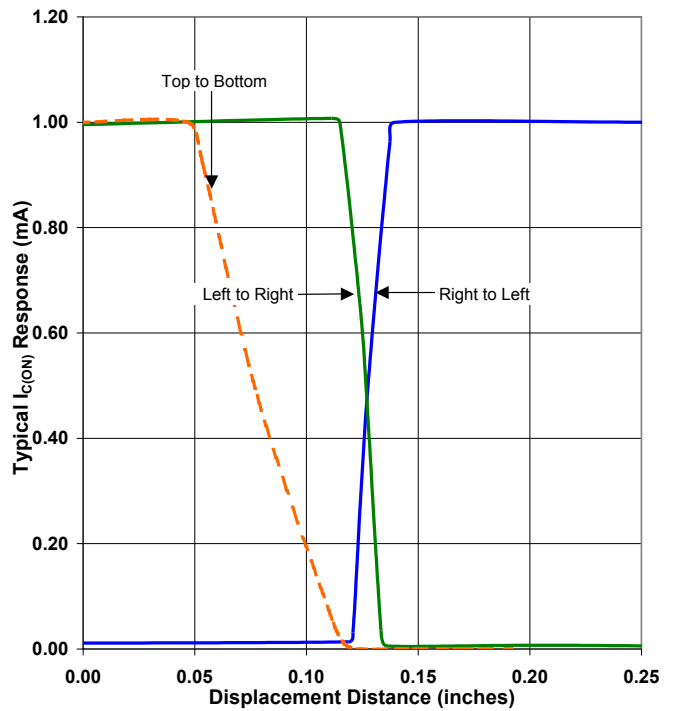

OPB820S10 - Flag in Middle of Slot

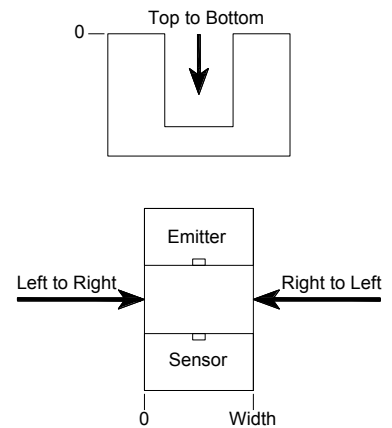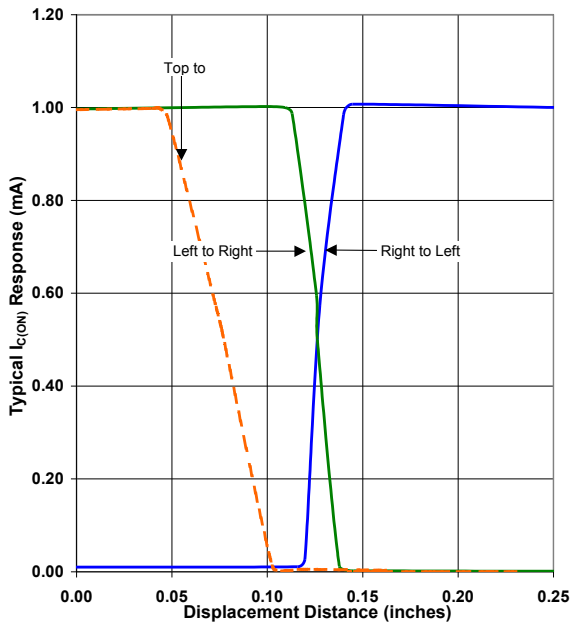

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com


Slotted Optical Switch

OPB820, OPB821Z, OPB821S_Z




Packaging

**Package Drawing
OPB820**

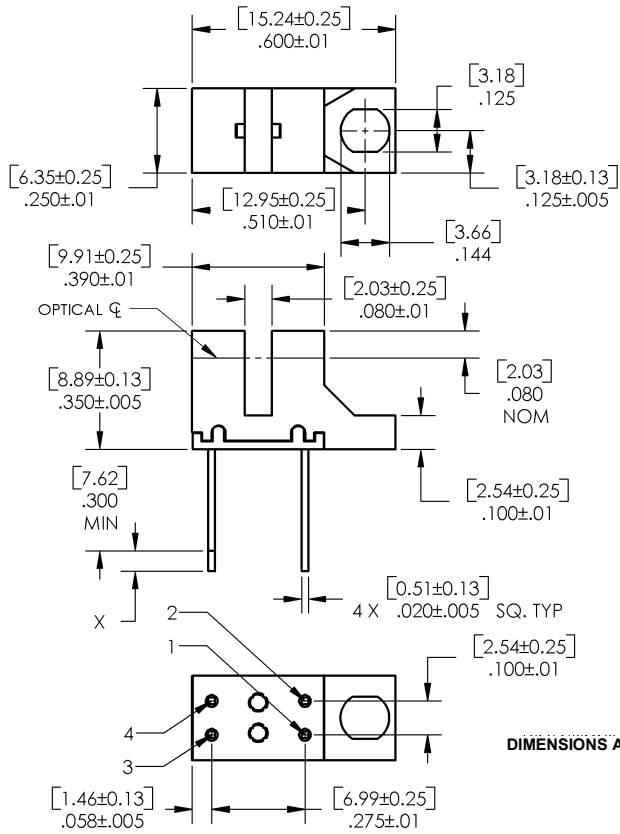



**Package Drawing
OPB821**

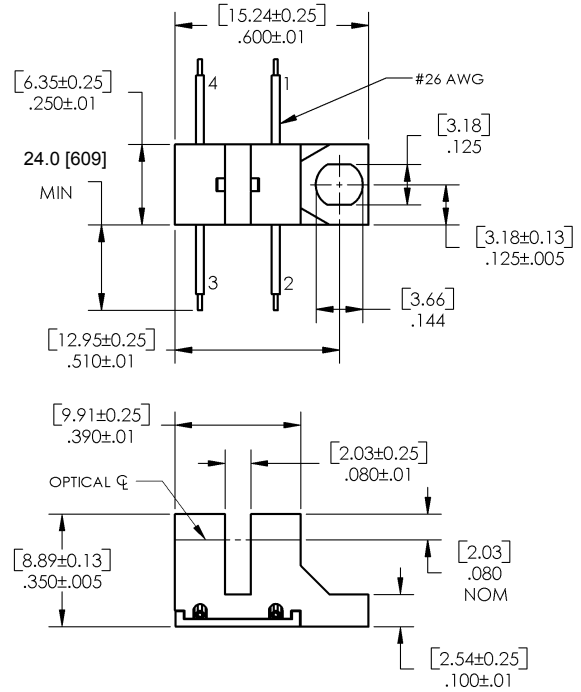

CONTAINS POLYSULFONE
To avoid stress cracking, we suggest using ND Industries' **Vibra-Tite** for thread-locking. **Vibra-Tite** evaporates fast without causing structural failure in OPTEK's molded plastics.

Pin #	Description	Pin #	Description
4	Cathode	2	Collector
3	Anode	1	Emitter

Color/Pin #	Description	Color/Pin #	Description
Green-3	Cathode	White-2	Collector
Orange-4	Anode	Blue-1	Emitter



General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[OPB821S3Z](#) [OPB821S5Z](#) [OPB821S10Z](#) [OPB820](#) [OPB820S3](#) [OPB820S10](#) [OPB821Z](#) [OPB820S5](#)