

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
G		REMOVED THE RIB ON THE BASE TO CASE ECO-15-011310	08DEC2015	YS.H	CHL

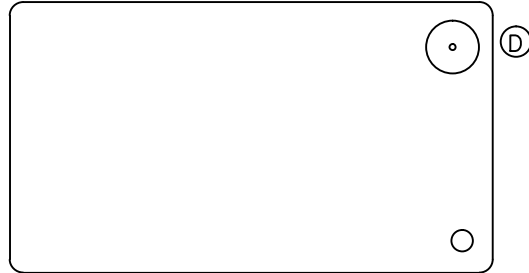

PART A

Ⓔ
Ⓔ1
Ⓔ3
Ⓕ


TE

OJE-SH-112LM

cULus**DE****CSC**

3A 250V ~
3A 30V =

12V



OEG C

LOT NO. Ⓔ

SEE NOTE 5 Ⓔ3

PART B

14.9±0.5

Ⓔ





0.3

3.8±0.3


0.45

0.3

0.3

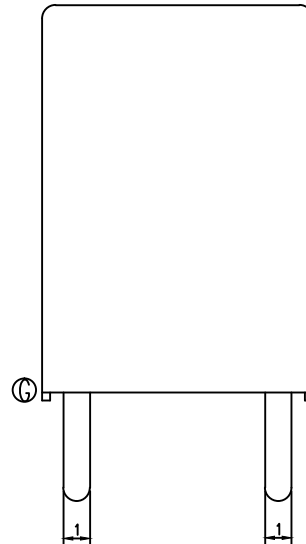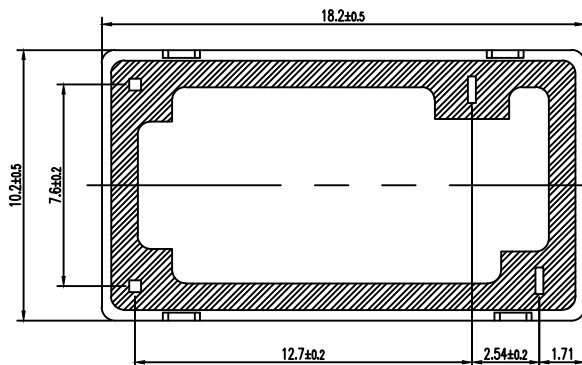

CONNECTION FIGURE

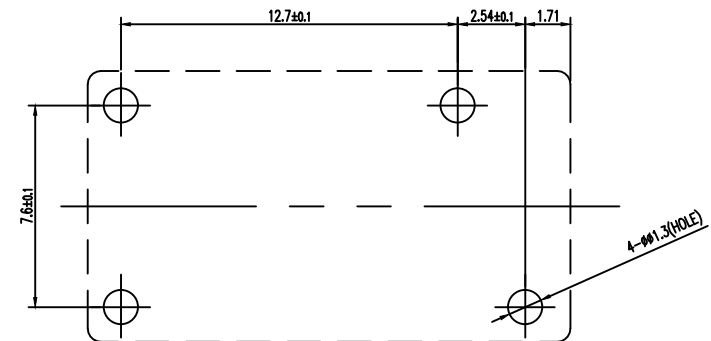FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
H.SASAKI

CHK

Y.OIKAWA

APVD
A.NAGAI

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE

TE Connectivity

NAME

OJE-SS-LM CUSTOMER DRAWING

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1461035

SCALE

5:1

SHEET

1 OF 2

REV

G

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

①	1461035-2	QJE-SS-118LM	107-79010	18V	QJE-SS-118LM	g
②	5-1419144-0	QJE-SS-103LM	107-79010	3V	QJE-SS-103LM	f
	6-1419128-7	QJE-SS-124LM	107-79010	24V	QJE-SS-124LM	e
	4-1419128-6	QJE-SS-112LM	107-79010	12V	QJE-SS-112LM	d
	3-1419128-9	QJE-SS-109LM	107-79010	9V	QJE-SS-109LM	c
	1461035-1	QJE-SS-106LM	107-79010	6V	QJE-SS-106LM	b
	3-1419128-0	QJE-SS-105LM	107-79010	5V	QJE-SS-105LM	a
	PART NO	TYPE NAME	PACKAGE SPEC	PART B	PART A	TYPE

RELAY TYPE

⑤① NOTES:

1.LOT NO. SYSTEM AS FOLLOWING:

WEEK
YEAR

⑤③ 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

⑤③ 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.
+0.5mm FOR LENGTH.

⑤③ 4.USED WELDED CONTACT&LASER MARKING.

⑤③ 6.ADD LOT NO. SYSTEM AS FOLLOWING;

① ② ③
I II III

I, DIGITS FOR DAY OF THE WEEK

1...MONDAY IN THIS WEEK;

2...TUESDAY IN THIS WEEK;

.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;

2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A,B.....Z

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		3UEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.SAKAKI	-
		CHK	Y.OIKAWA	-
		APVD	A.NAGAI	-
DIMENSIONS: mm		PRODUCT SPEC		
		APPLICATION SPEC		
MATERIAL		WEIGHT		
FINISH		CUSTOMER DRAWING		
		SIZE	CAGE CODE	DRAWING NO
		A3	00779	C=1461035
		RESTRICTED TO		
		SCALE	SHEET	REV
		5:1	2 OF 2	G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1419128-9](#)