

FLEX STACK

(2.54 mm) .100"

HW-14-08-G-S-300-100

ZW-06-13-L-D-787-118

DW-11-20-T-D-825

DW, EW, ZW, HW-TH SERIES

FLEXIBLE .025" SQ BOARD STACKERS

Mates with:

SSW, SSQ, ESW, ESQ, CES, SLW, BSW, BCS, SSM, HLE, PHF

Cable Mates:

IDSS, IDSD

SPECIFICATIONS

For complete specifications see www.samtec.com?DW, www.samtec.com?EW, www.samtec.com?ZW or www.samtec.com?HW-TH

Insulator Material:

DW, EW, ZW: Black Glass Filled Polyester

HW: Natural Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over

50 μ " (1.27 μ m) Ni

Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

RoHS Compliant:

Yes

Lead-Free Solderable:

DW, EW, ZW:

No, Lead Wave Only

HW: Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Other platings


Notes:

For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.


This Series is non-standard, non-returnable.

TYPE STRIP


DW
= (2.79 mm)
.110" Tail




EW
= (8.38 mm)
.330" Tail



ZW
= Custom Tail



HW
= High Temp Custom Tail



NO. PINS PER ROW

LEAD STYLE


PLATING OPTION

ROW OPTION

STACKER HEIGHT


OTHER OPTIONS

Specify LEAD STYLE from chart



LEAD STYLE	OAL
-07	(10.92) .430
-08	(13.46) .530
-09	(18.54) .730
-10	(21.08) .830
-11	(23.62) .930
-12	(26.16) 1.030
-13	(31.24) 1.230
-14	(36.32) 1.430
-15	(16.00) .630
-16	(11.30) .445
-17	(12.19) .480
-19	(33.78) 1.330
-20	(28.70) 1.130

01 thru 50

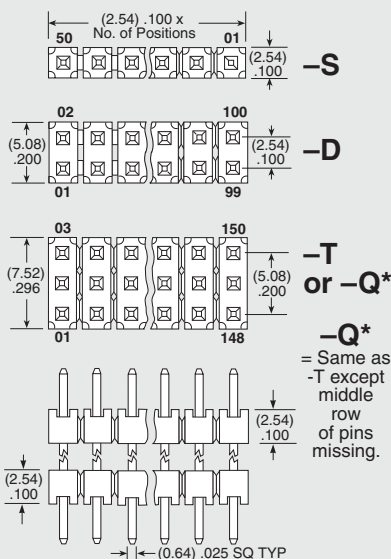


-S
= Single Row

-D
= Double Row


-T
= Triple Row

-Q
= Double Row .200" (5.08 mm) row space

-“XXX”
= Stacker Height (in inches) (5.08 mm) .200" minimum
Example: -250 = (6.35 mm) .250"



-“XXX”
= ZW or HW Tail Length (in inches) (1.40 mm) .055" minimum
Example: -250 = (6.35 mm) .250"



-F
= Gold flash on contact, Matte Tin on tail

-L
= 10 μ " (0.25 μ m) Gold on contact area of longer tail, Matte Tin on tail

-G
= 10 μ " (0.25 μ m) Gold on contact area of longer tail, Gold flash on balance

-T
= Matte Tin

-LL
= Locking Lead (Shortest dimension between the tail and the post is the end that will be crimped. Available on tails from (2.29 mm) .090" to (7.87 mm) .310" only.) Single row, 01 & 02 positions & -Q row not available

-“XXX”
= Polarized
Specify omitted pin position

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[ZW-03-11-G-S-275-125](#)