

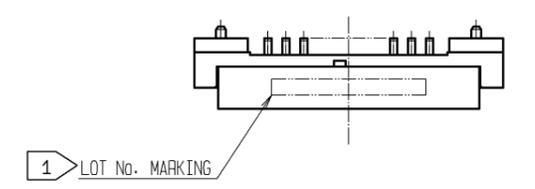
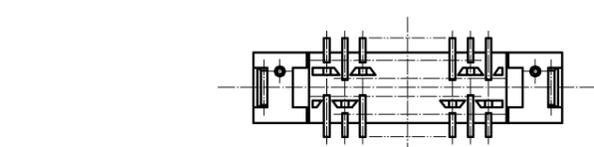
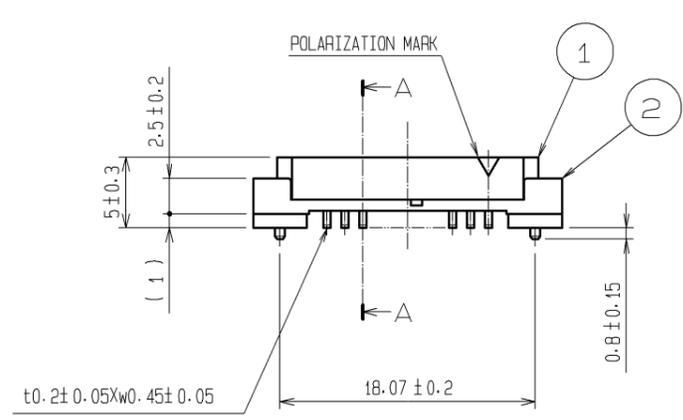



Dec.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

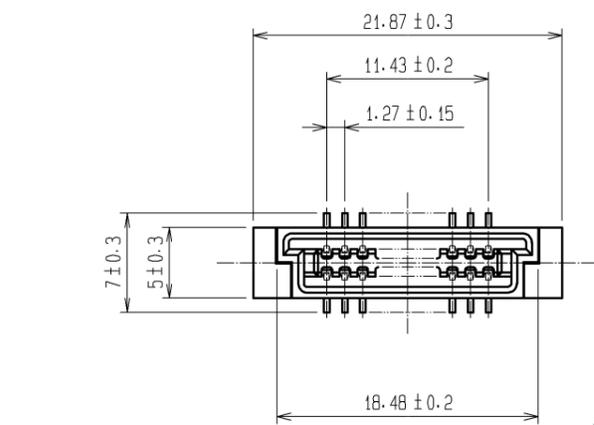

RECOMMENDED PC BOARD LAND PATTERN(MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

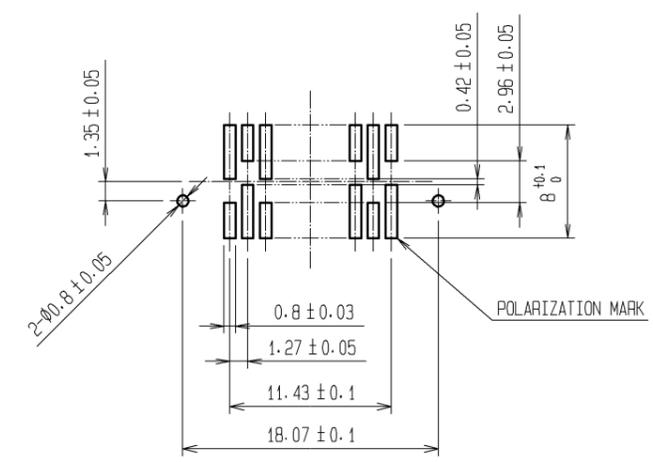

A-A(5:1)

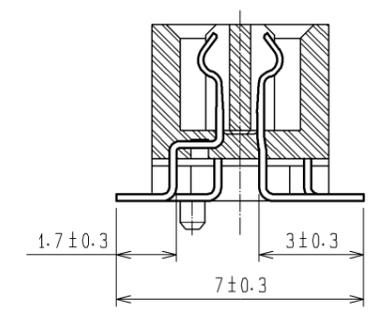

HRS DRAWING FOR REFERENCE

- NOTES
- 1 LOT No. SHALL BE INDICATED AT OPPTIONAL POSITION.
 - 2 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1.2.4	POLYAMIDE	BEIGE	UL94V-0	3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min. LEAD AREA:TIN-PLATING 1.2μm min. UNDER PLATING:NICKEL 1μm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS mm		SCALE 2:1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	11.02.01	DRAWING NO.		EDC3-083933-21		
		CHECED : HT. YAMAGUCHI	11.02.01	PART NO.		FX4B1-20S-1.27SV(71)		
		DESIGNED : SY. KAMIGA	11.02.01	CODE NO.		CL574-0311-8-71		
		DRAWN : HK. SUNADORI	11.02.01					