

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0014564033**
Status: **Active**
Overview: SL Modular Connectors
Description: 2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version D, Back Ribs, Wire Size 26 AWG, 0.76µm Gold (Au), 3 Circuits

Documents:

3D Model	Product Specification TS-70541-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-0001-001 (PDF)
Product Specification PS-70400-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Ribbon Cable / Wire Trap Connectors
Series	<u>70400</u>
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Capable	No
Overview	<u>SL Modular Connectors</u>
Product Name	SL
UPC	800753762954

Physical


Circuits (Loaded)	3
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.762µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Yes
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm max.
Wire Size AWG	26
Wire/Cable Type	Discrete Wire, Ribbon Cable

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Material Info

Engineering Number	70400-1297
--------------------	------------

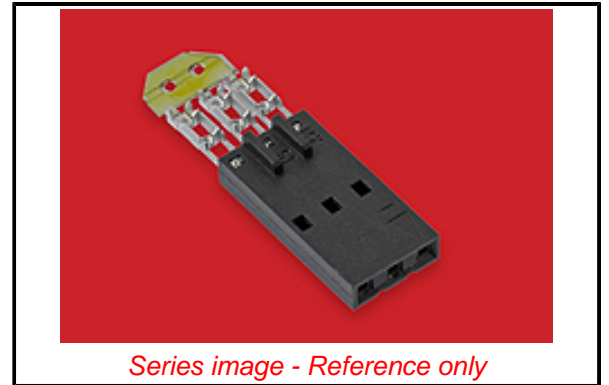

Series image - Reference only

EU ELV

Not Reviewed

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

Search Parts in this Series

70400 Series

Mates With

SL 70004 Interim Clip (Single Row), 70013 Interim Clip (Dual Row)

Use With

7307 Tinned 28AWG, 7767 Topcoat 28AWG, 24241 Tinned 26AWG, 8996 Topcoat 26AWG, 24226 Tinned 24AWG, 8997 Topcoat 24AWG, 24369 High Flex 26AWG, 24389 High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
-------------	-----------

IDT - Semi-automatic	<u>11200949</u>
----------------------	-----------------

- Bench-Top	
-------------	--

Terminator	
------------	--

IDT Discrete	<u>621000700</u>
--------------	------------------

Handtool Module	
-----------------	--

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing

PK-70873-0001-001

PS-70400-001, TS-70541-001-001

SDA-70400-1296-1319

Ribbon Cable Tool Kit, Press Not Included	<u>622016600</u>
Hawk Ribbon Cable Terminator without Break-off	<u>623003000</u>
Hawk Semi-Automatic Discrete Wire Terminator	<u>623003100</u>
Hawk Semi-Automatic Discrete Wire Terminator for Rebuilt CE Approved*	<u>623004900</u>
Hawk Flat Flex Cable Terminator with Break-off	<u>623005200</u>
Hawk Ribbon Cable Terminator with Break-off	<u>623005300</u>

This document was generated on 11/23/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[14-56-4033](#)