


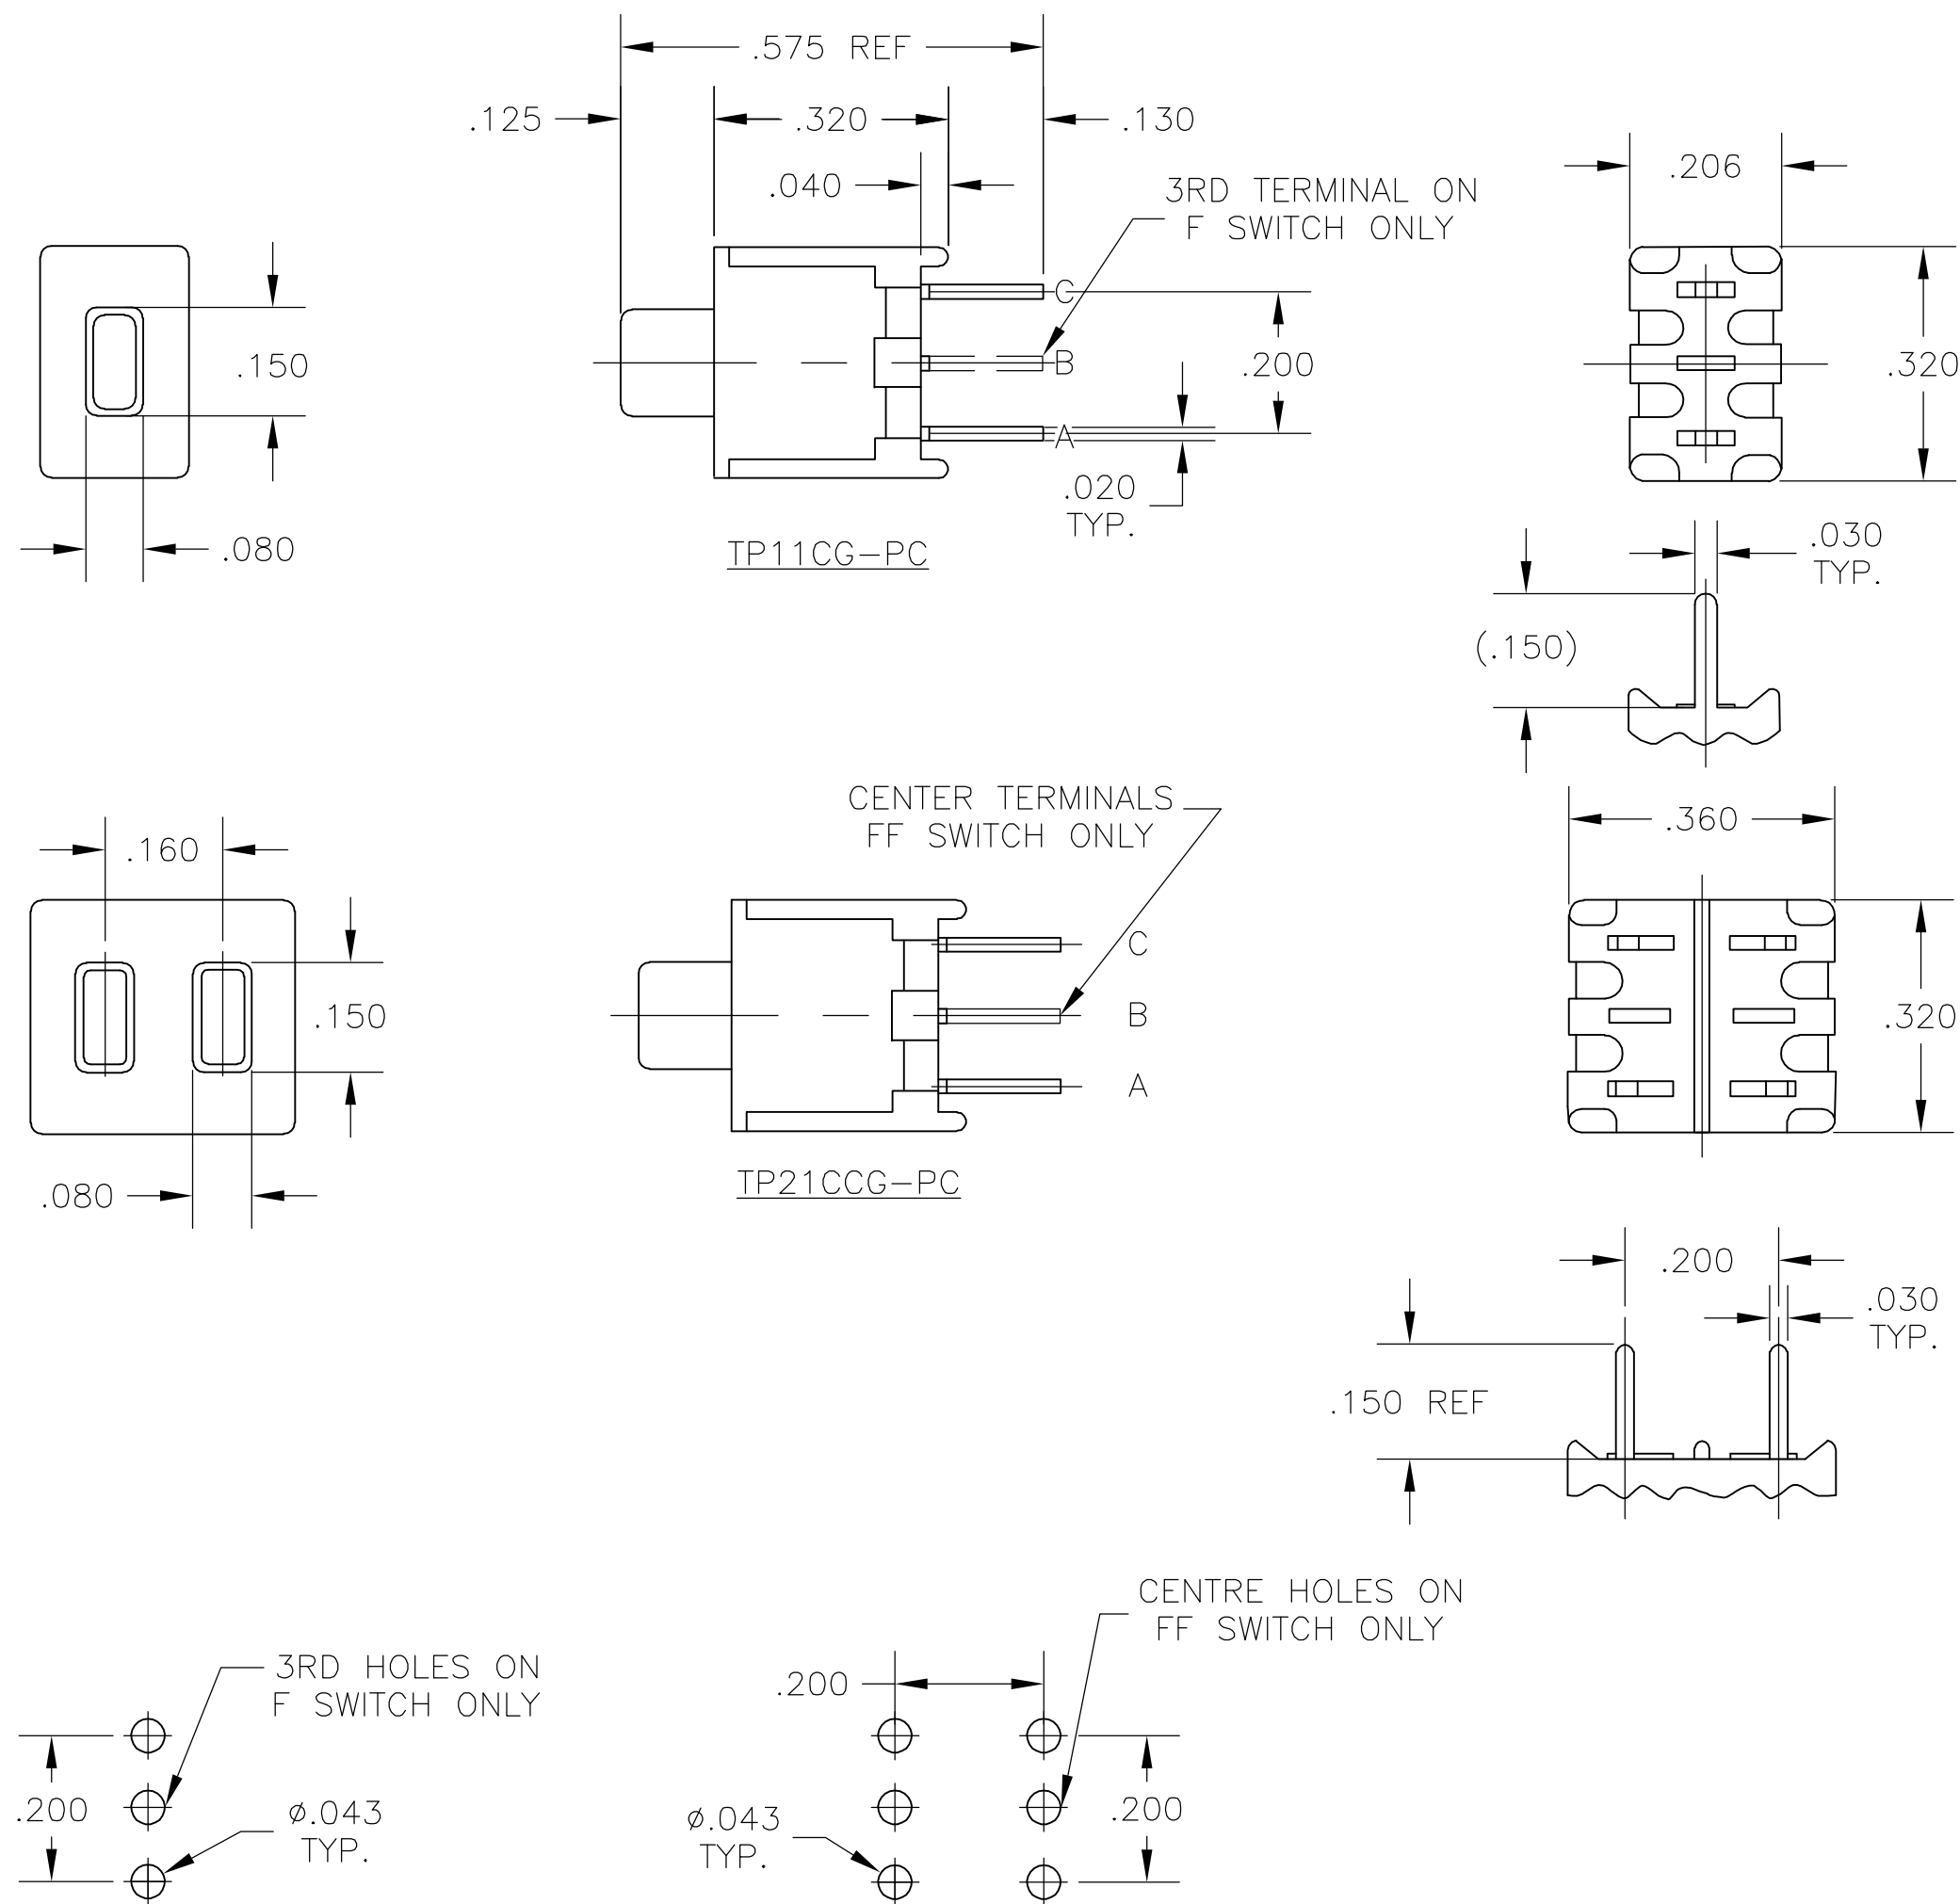

RECOMMENDED HOLE LAYOUT

TOLERANCE ±.002 UNLESS
OTHERWISE MENTIONED

SPECIFICATIONS:

MATERIALS:

CASE : HIGH TEMPERATURE PLOYSTER UL 94V-0.
 ACTUTAOOR BUTTON : THERMOPLASTIC.COLORS:SEE CHART BELOW
 MOVING CONTACT : COPPER ALLOY.GOLD PLATED OVER NICKEL.
 FIXED CONTACT : COPPER ALLOY.GOLD PLATED OVER NICKEL.
 TERMINALS : COPPER ALLOY.TIN LEAD PLATED.
 TERMINAL SEAL : SP EPOXY
 DP EPOXY OPTIONAL.

ELECTRICAL:

CONTACT RATING : GOLD=0.4VA MAX.@ 20 VDC OR PEAK AC.
INITIAL CONTACT RESISTANCE : 20 MILLIOHMS MAX.
INSULATION RESISTANCE : 1.000MEGHOHMS @ 500VDC MIN.
DIELECTRIC STRENGTH : 1.000VAC @ SEALEVEL.
LIFE EXPECTANCY:GOLD : 1 POLES=100,000CYCLES.
2 POLES=80,000 CYCLES.

MECHANICAL:

ACTUATION FORCE : TP11CG-PC.TP21CCG-PC : 9oz(.26kg)
TP11FG-PC.TP21FFG-PC : 12oz(0.34kg)
ACTUTATION TRAVEL : .030 APPROX.

ENVIRONMENTAL:

OPERATING TEMPERATURE : -22°F TO +149°F(-30°C TO 65°C)
STORAGE TEMPERATURE : -22°F TO +149°F(-30°C TO +65°C)

NOTES:

1. INTERPRET DRAWING PER ASME Y14.5M-1994.

(*)	COLORS
0	BLACK
2	RED
6	BLUE

MODEL NUMBER	MODEL NUMBER	ACTION	FREE BUTTONS	DEPPRESSED BUTTONS
TP11CG-PC(*) SPST	TP21CCG-PC(*) 2 X SPST	NORMALLY OPEN	NONE	A TO C
TP11FG-PC(*) SPDT	TP21FFG-PC(*) 2 X SPDT	MOMENTARY	B TO A	B TO C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	16AUG77
B BUCKHEIT	

CHK	16NOV78
-----	---------

B.B	
APVD	-

PRODUCT SPEC

PRODUCT SPEC

APPLICATION SPEC

WEIGHT	—
--------	---

CUSTOMER DRAWING

CUSTOMER DRAWING

tyco
Electronics

NAME	PUSH BUTTON SWITCH TP11CG/FG-PC(*) AND TP21CCG/FFG-PC(*)
------	---

[illegible]

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
------	-----------	------------	---------------

A2	00779	©-1437571-4	—
----	-------	-------------	---

SCALE	1:1	SHEET	1 OF 1	REV	B
-------	-----	-------	--------	-----	---

	4:		or		B
--	----	--	----	--	---

1437571-4

B

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TP11FGPC0](#)