

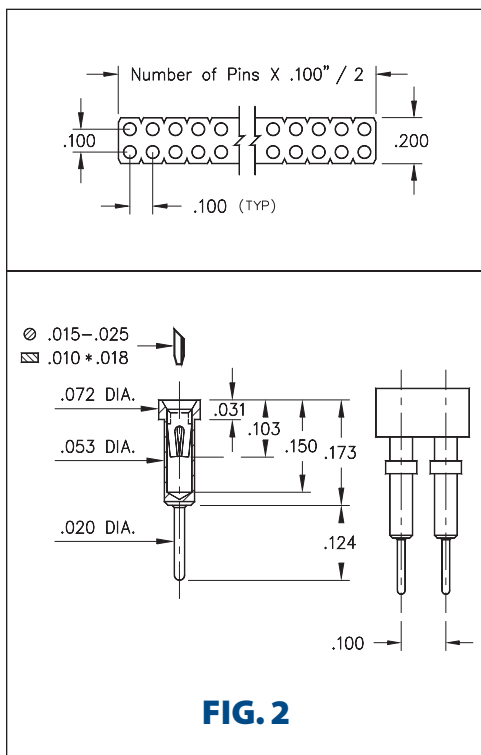


INTERCONNECTS

SERIES 712 • .100" GRID CARRIER WITH SOLDER TAIL • SINGLE AND DOUBLE ROW STRIPS

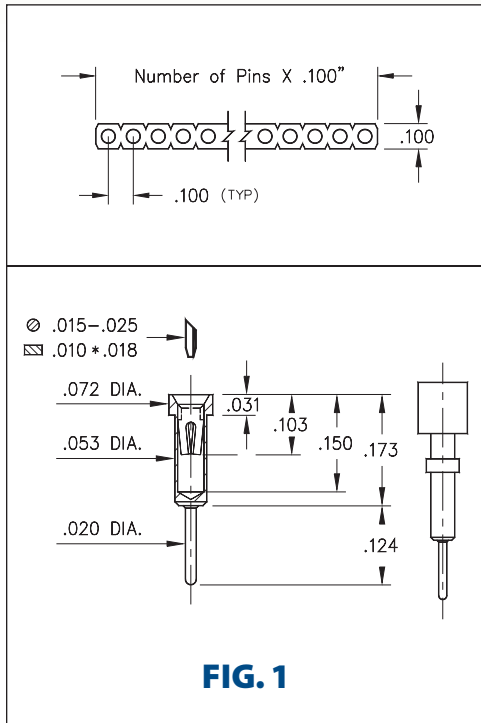

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes
- Series 712 use MM #0255 pins. See page 165 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

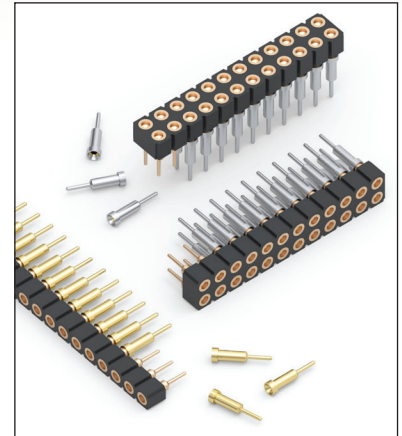

ORDERING INFORMATION

FIG. 1	Single Row (.028" or .055" min. mounting holes)	
	712-XX-1	-41-001000
	Specify number of pins	01-64
FIG. 2	Double Row (.028" or .055" min. mounting holes)	
	712-XX-2	-41-001000
	Specify number of pins	04-64



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=	11	13	91	93	41	43	
Sleeve (Pin)	10 μ" Au	10 μ" Au	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn	
Contact (Clip)	10 μ" Au	30 μ" Au	10 μ" Au	30 μ" Au	10 μ" Au	30 μ" Au	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[712-93-264-41-001000](#) [712-93-164-41-001000](#) [712-93-132-41-001000](#) [712-93-120-41-001000](#) [712-13-264-41-001000](#) [712-13-164-41-001000](#) [712-13-132-41-001000](#) [712-13-120-41-001000](#) [712-43-264-41-001000](#) [712-43-164-41-001000](#) [712-43-132-41-001000](#) [712-43-120-41-001000](#)