

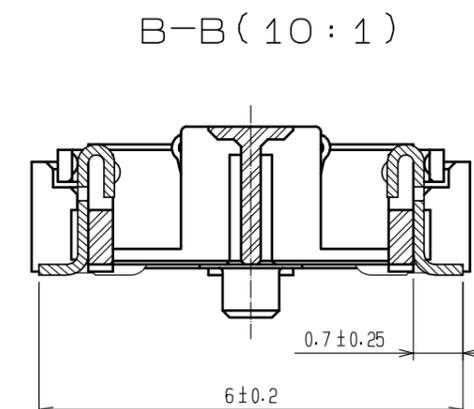
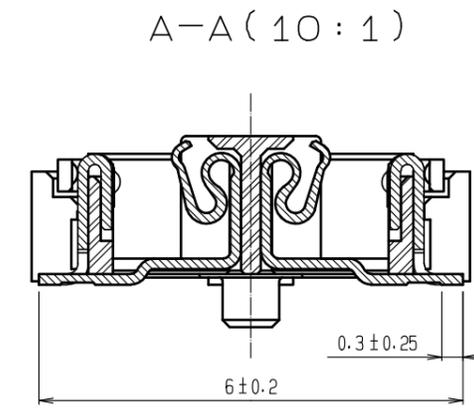


Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

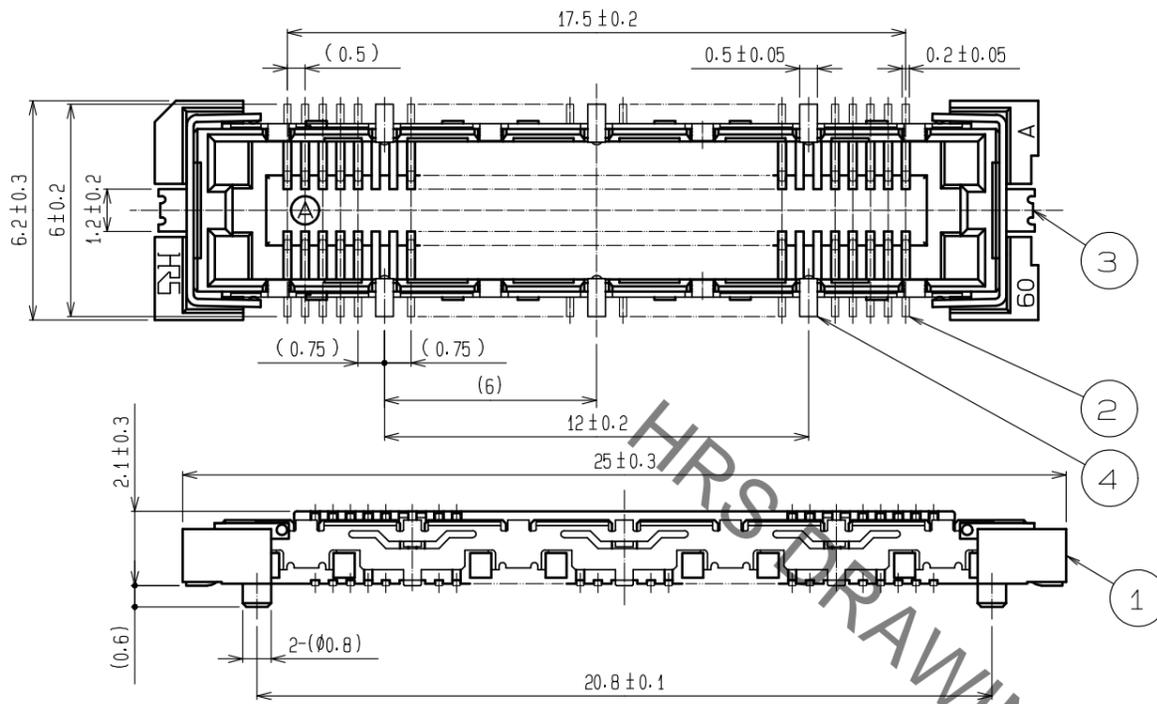

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

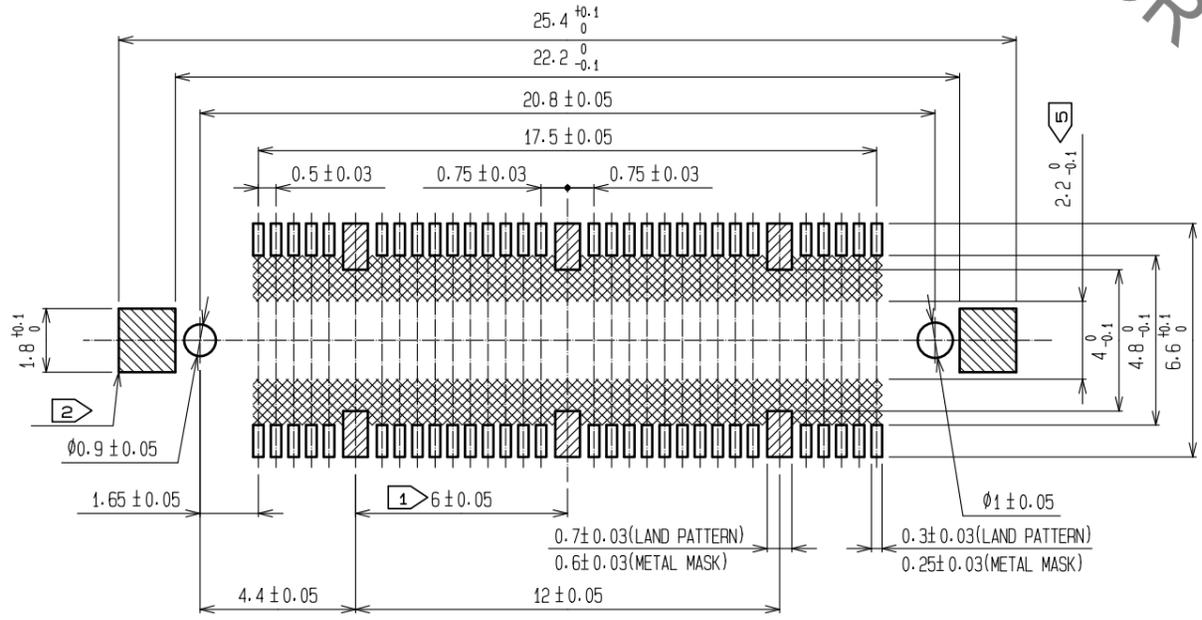


- NOTES
- ① 6 HATCHED PARTS: GROUND CIRCUIT.
 - ② 2 HATCHED PARTS: GROUND CIRCUIT.
 - ③ SMT LEAD-COPLANARITY: 0.1 MAX.
 - ④ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - ⑥ TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - ⑦ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3	Phosphor bronze	Tin reflow plating 1μm MIN	6	PET	Top cover tape
2	Phosphor bronze	Contact: Gold plating 0.1μm MIN	5	PET	Embossed carrier tape
		Lead : Gold plating 0.03μm MIN Under : Nickel plating 1μm MIN	4	Phosphor bronze	Surface: Tin plating 1μm MIN Under : Nickel plating 1μm MIN
1	LCP	Beige, UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5:1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00005925	
APPROVED : HS. OKAWA 20081106			DESIGNED	MT. ITANO	
CHECKED : HT. YAMAGUCHI 20081106			CHECKED	HT. YAMAGUCHI	
DESIGNED : SY. KAMIGA 20081106			DATE	20200306	
DRAWN : HK. SUNADORI 20081105			DRAWING NO. EDC-152632-91-21		
HRS HIROSE ELECTRIC CO., LTD.			PART NO. FX11A-60S/6-SV(91)		
			CODE NO. CL573-0702-9-91		

Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

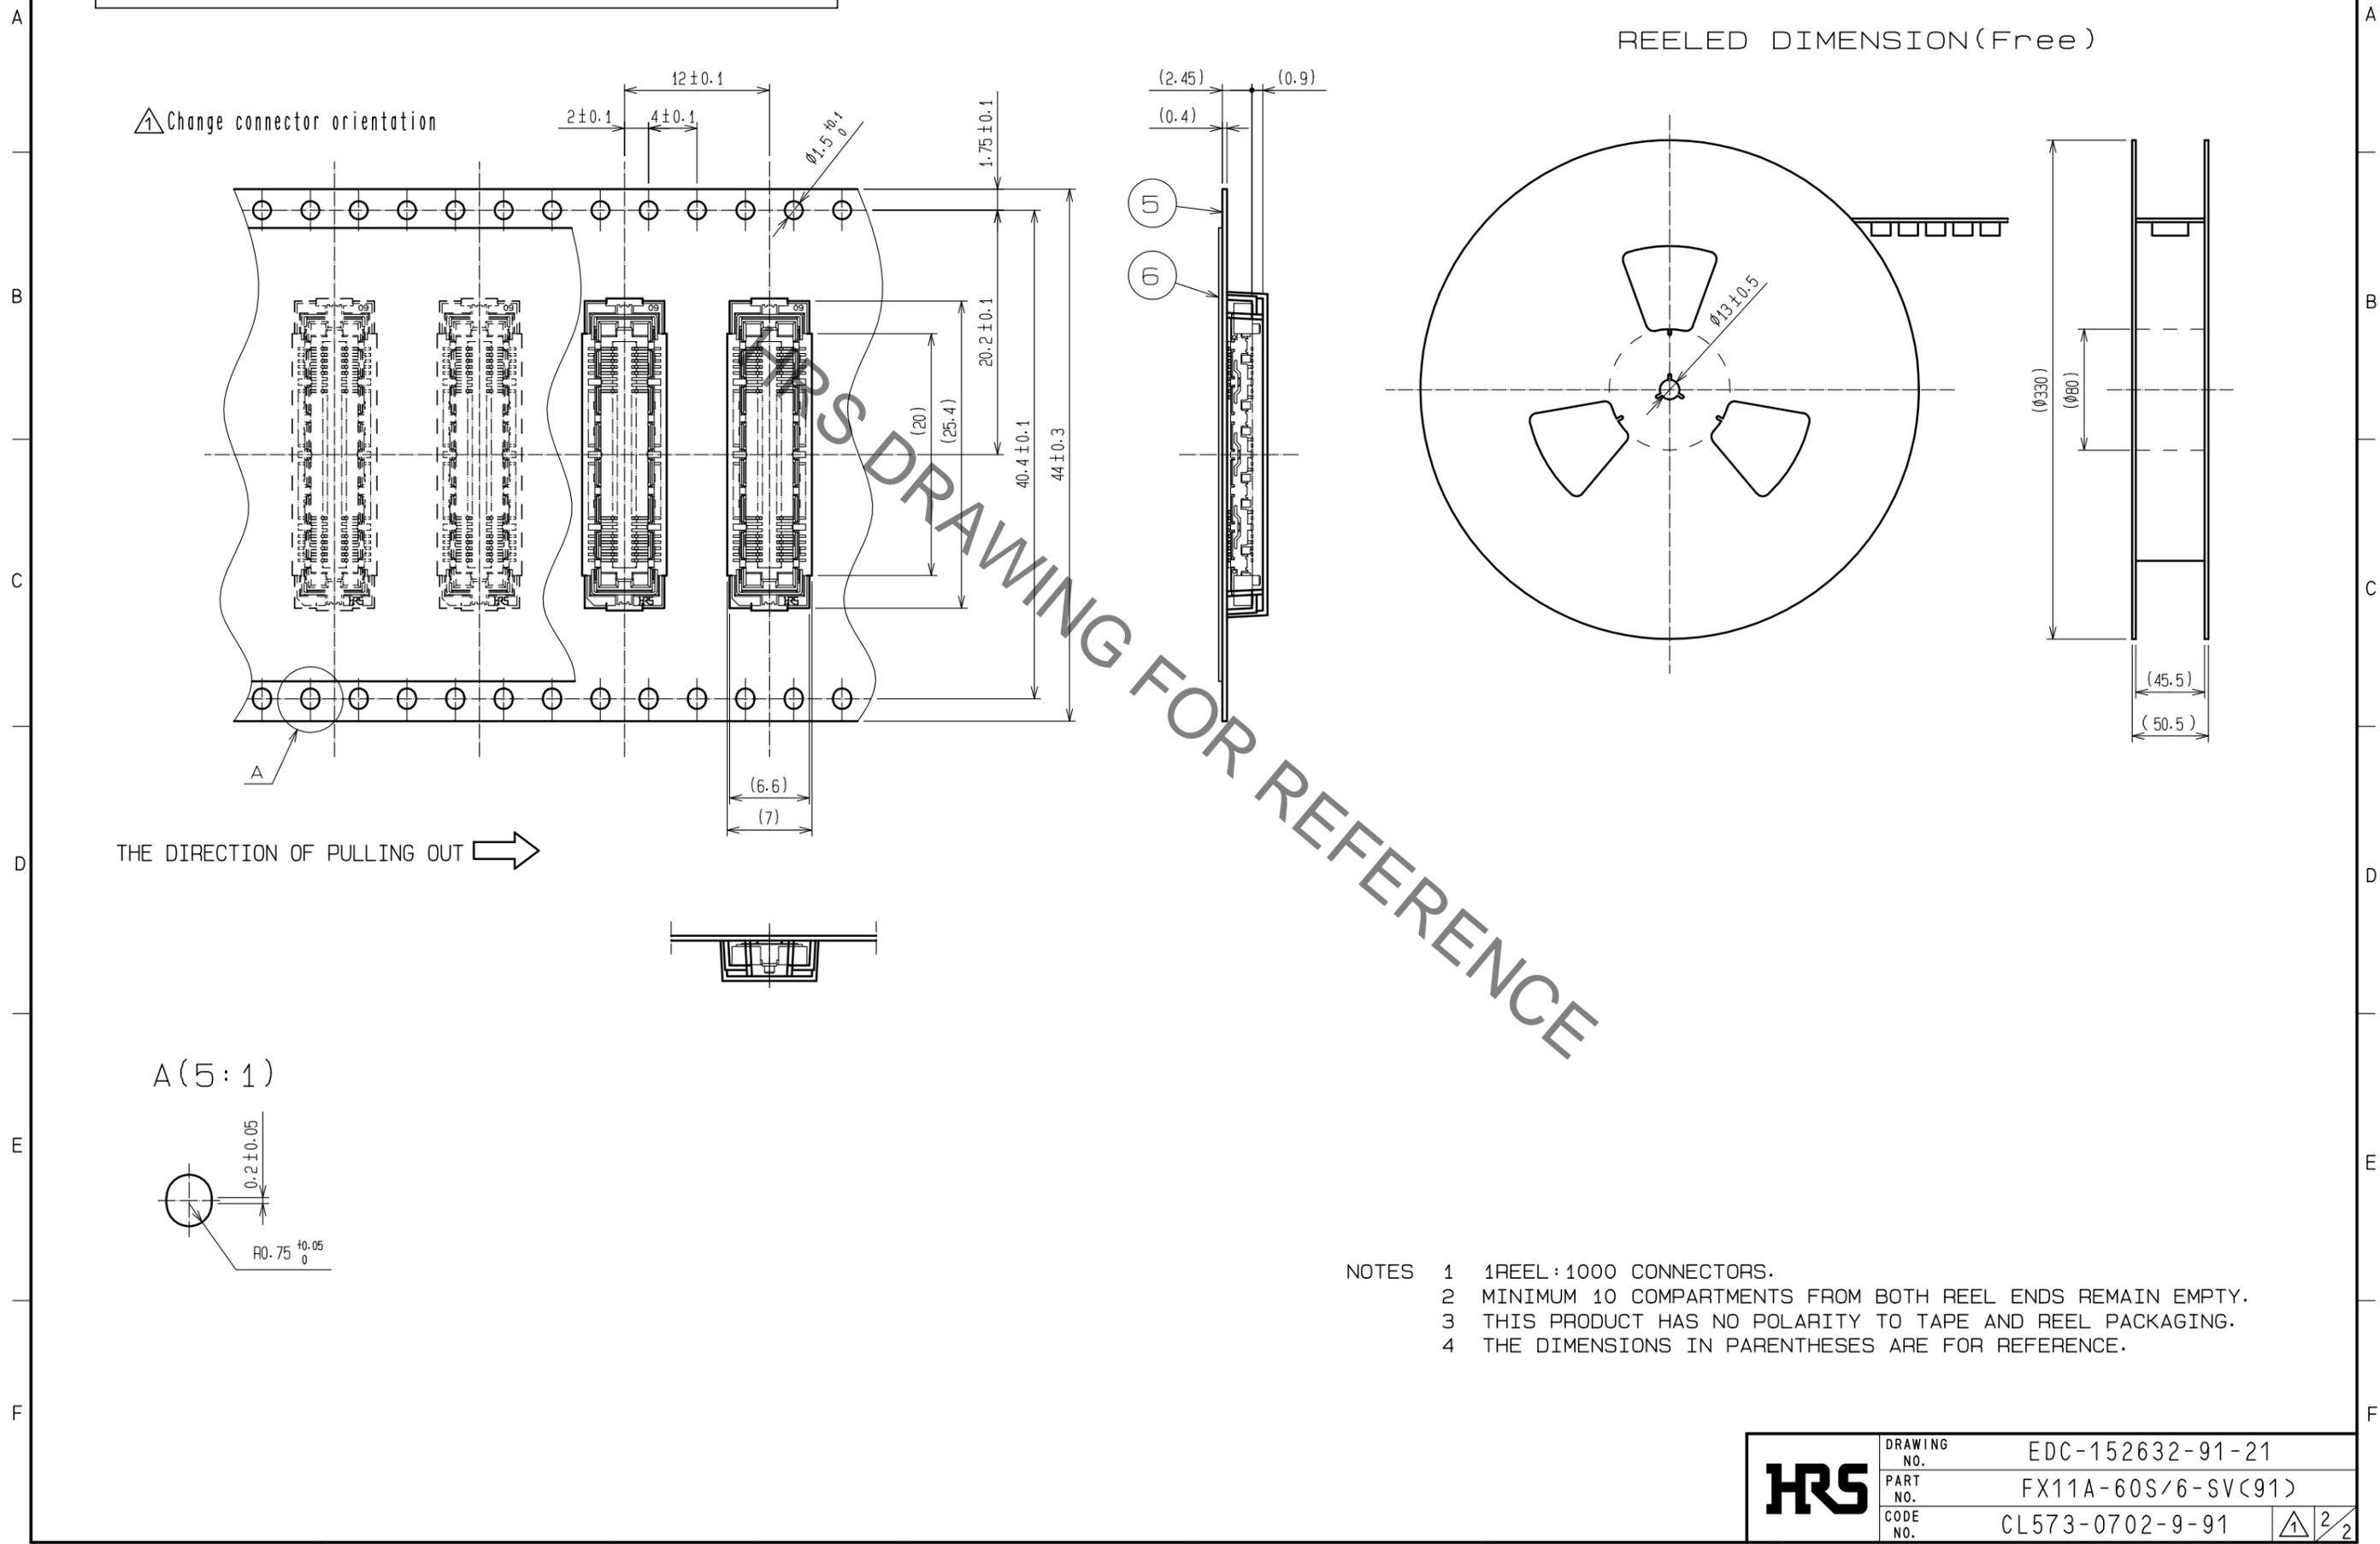

HRS	DRAWING NO.	EDC-152632-91-21
	PART NO.	FX11A-60S/6-SV(91)
	CODE NO.	CL573-0702-9-91
		2/2