

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E1	REVISED PER ECO-17-014987	12oct17	DT	TD


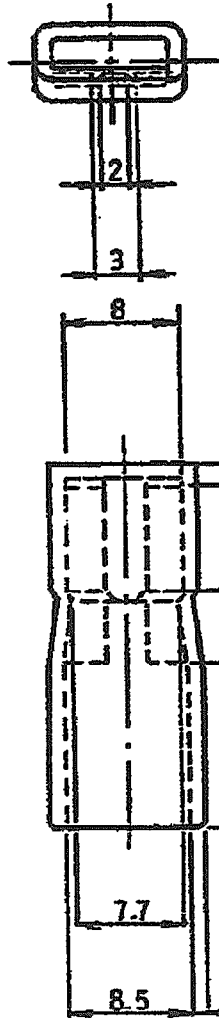


TABLE 1

温度範囲 TEMPERATURE LIMIT	P/N 174817-1	P/N 174817-2
使用温度範囲 OPERATING TEMPERATURE LIMIT	-40°C~105°C	-40°C~60°C
保管温度範囲 STORAGE TEMPERATURE LIMIT	-40°C~50°C	-40°C~50°C
作業温度範囲 WORKING TEMPERATURE LIMIT	5°C~50°C	5°C~50°C

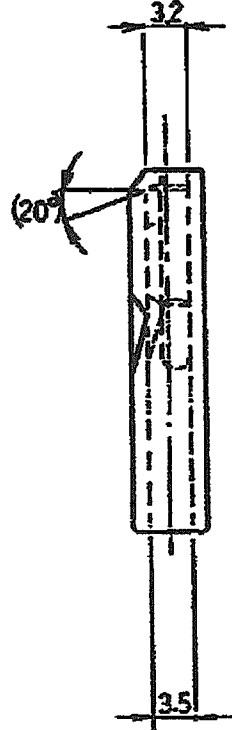

- 注記 ;
1. 一般公差 : ±0.3
 2. 適用コンタクト型番 : 175020, 175022, 175024
 - ③ 使用温度上限 : TABLE 1 参照
 4. 本製品に関する適用製品規格は用意しておりません。製品の使用に際しては、適用性について御確認の上決定下さい。

- NOTES :
1. GENERAL TOLERANCE : ±0.3
 2. APPLICABLE RECEPTACLE P/N : 175020, 175022, 175024
 - ③ OPERATING TEMPERATURE UPPER LIMIT : SEE TABLE 1
 4. THIS PRODUCT IS NOT PREPARED THE PRODUCT SPECIFICATION. THEREFORE, PLEASE USE THIS PRODUCT AFTER CONSIDERING THE APPLICABILITY OF THIS PRODUCT.

黄 YELLOW	PVC(軟質) PVC(SOFT) UL94V-0	174817-2
青 BLUE	PVC(軟質) PVC(SOFT) UL94V-0	174817-1
色 COLOR	材料 MATERIAL	型番 P/N

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.
COPYRIGHT

DIMENSIONS: 単位: 特 MM	DWN	100CT2002	MATERIAL 材料	SEE TABLE	FINISH 仕上						
	CHK	M.SUZUKI	TE TE Connectivity								
	APVD	M.SHINDO									
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差			NAME 名称	INSULATION SLEEVE FOR 250 SERIES POSITIVE LOCK EX REC. (BACK ENTRY TYPE)						
PRODUCT SPEC 製品規格			SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO					
APPLICATION SPEC 取付適用規格			A4	00779	C-174817	-					
WEIGHT			CUSTOMER DRAWING			SCALE 尺度	2:1	SHEET	1 OF 1	REV	E2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[174817-1](#)