


SMD Power Inductor CDRH8D28




Halogen
Free




Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 8.3 × 8.3 × 3.0 mm Max.
- Product weight: 0.57g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Dimension - [mm]

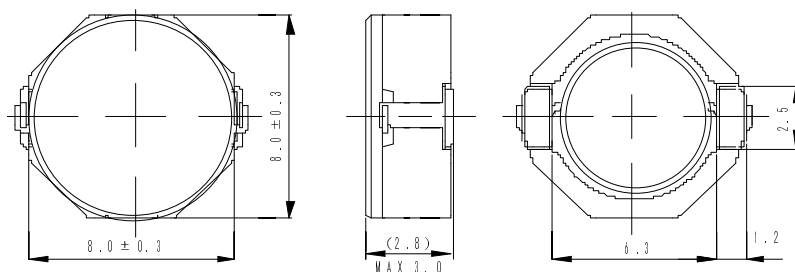

Land pattern and Schematics - [mm]

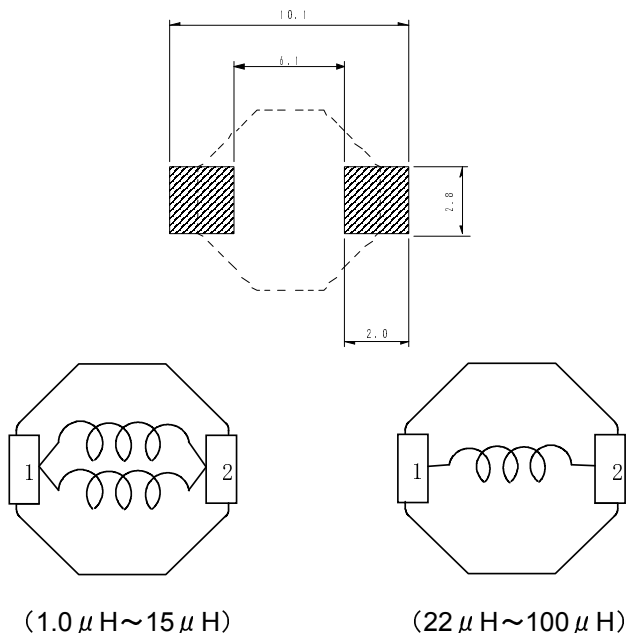

Environmental Data

- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging
- 12.9" diameter reel
- 1000pcs per reel

Applications

- Ideally used in Notebook PC, Game machine, HDD, DVC, LCD TV etc as DC-DC converter inductors.

SMD Power Inductor

CDRH8D28



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) Max. (Typ.) (at 20°C)	Saturation Current (A) ※2	Temperature Rise Current (A) ※3
CDRH8D28NP-1R0NC	1R0	1.0 $\pm$ 30%	11.0(8)	6.50	7.00
CDRH8D28NP-2R5NC	2R5	2.5 $\pm$ 30%	15.6(12)	4.50	6.40
CDRH8D28NP-3R3NC	3R3	3.3 $\pm$ 30%	18.2(14)	4.00	6.00
CDRH8D28NP-4R7NC	4R7	4.7 $\pm$ 30%	24.7(19)	3.40	4.50
CDRH8D28NP-7R3NC	7R3	7.3 $\pm$ 30%	39.0(30)	2.80	3.40
CDRH8D28NP-100NC	100	10 $\pm$ 30%	47.0(36)	2.50	3.20
CDRH8D28NP-150NC	150	15 $\pm$ 30%	69.0(53)	1.90	2.35
CDRH8D28NP-220NC	220	22 $\pm$ 30%	99.0(76)	1.60	1.85
CDRH8D28NP-330NC	330	33 $\pm$ 30%	156(120)	1.30	1.45
CDRH8D28NP-470NC	470	47 $\pm$ 30%	195(150)	1.15	1.30
CDRH8D28NP-680NC	680	68 $\pm$ 30%	286(220)	0.92	0.98
CDRH8D28NP-101NC	101	100 $\pm$ 30%	430(330)	0.75	0.80

※1. Inductance measuring conditions at 100kHz.

※2. Saturation current: The DC current at which the inductance decreases to 65% of its nominal value.


※3. Temperature rise current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$. ($T_a=20^{\circ}\text{C}$)

SMD Power Inductor CDRH8D28



Saturation Current & Temperature Rise Graph



— L (20°C) — L (105°C) — ΔT

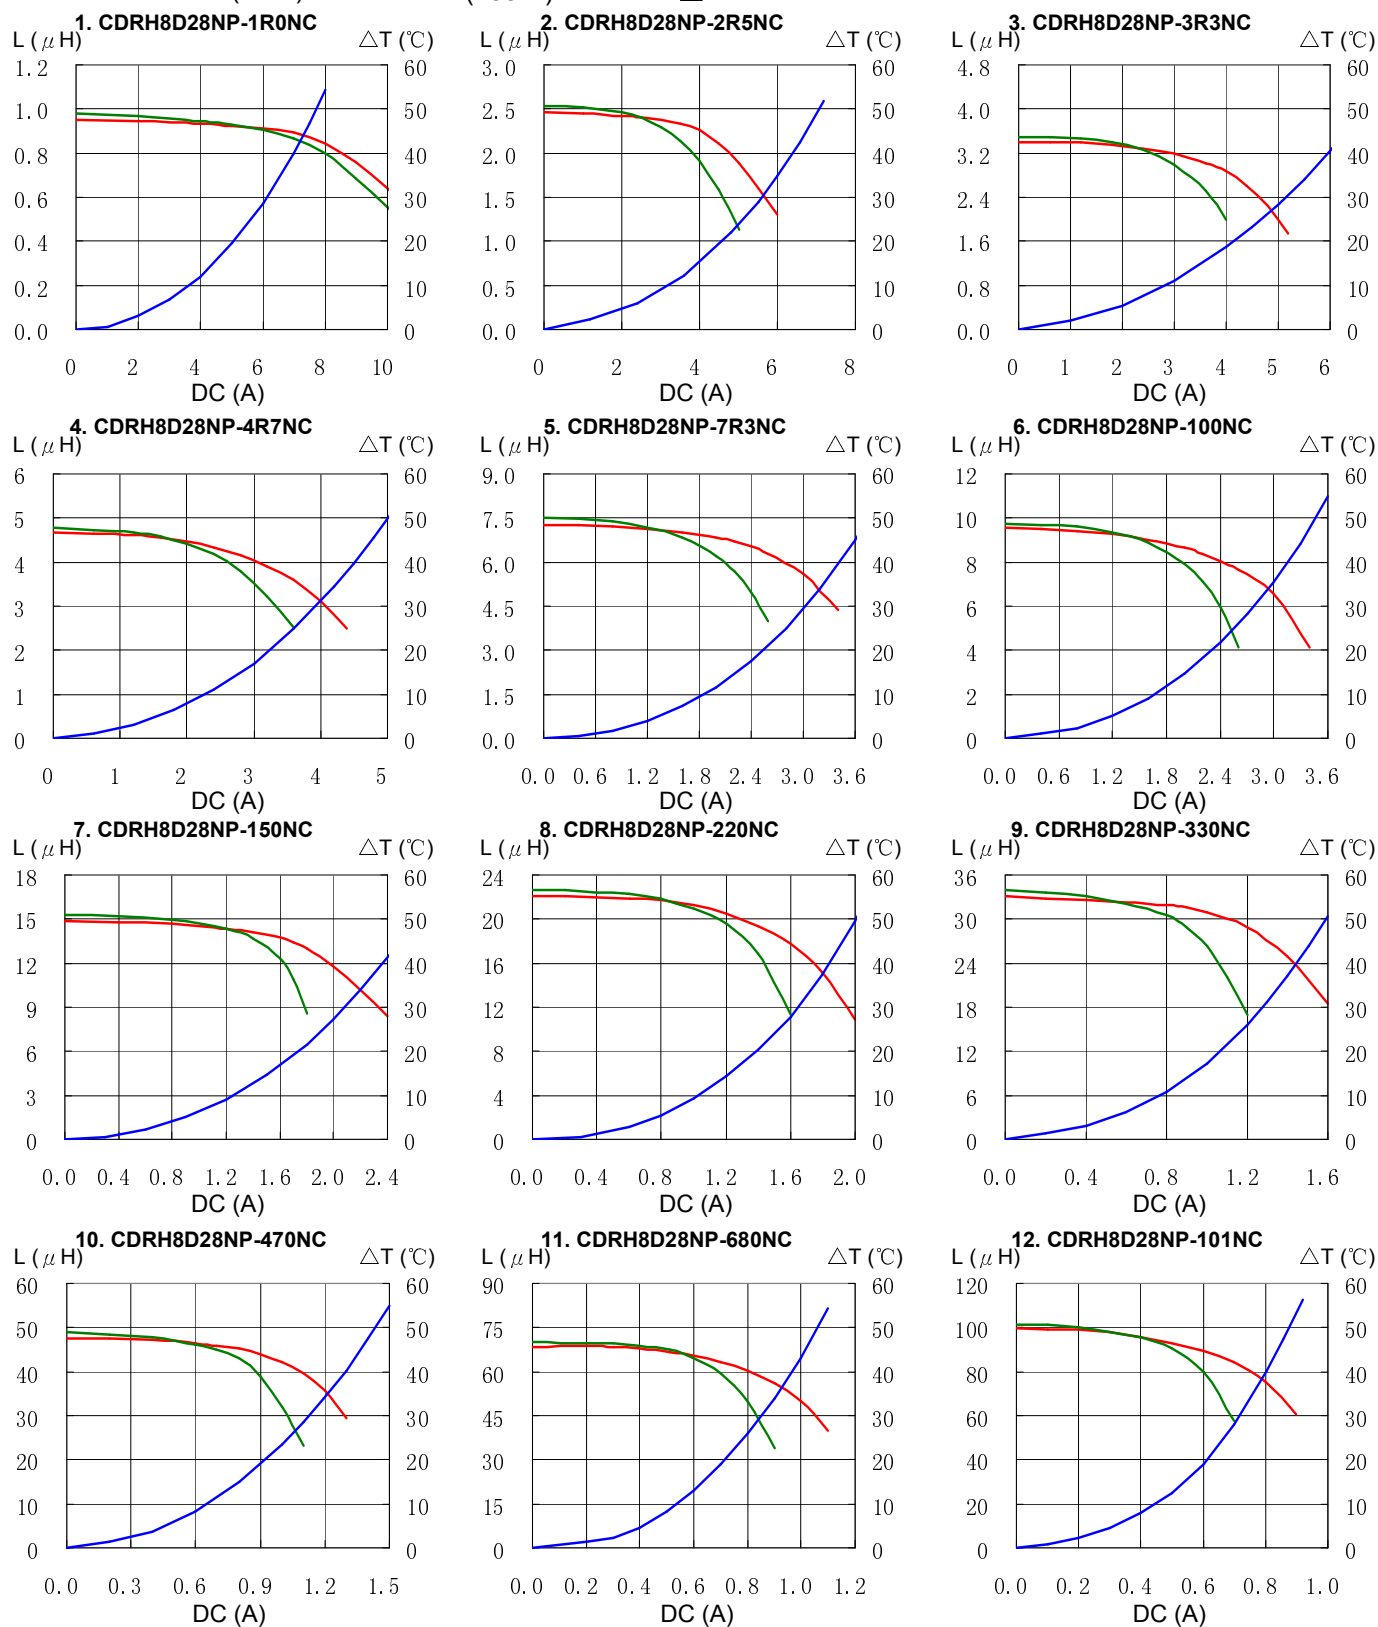

SMD Power Inductor CDRH8D28



Solder Reflow Condition

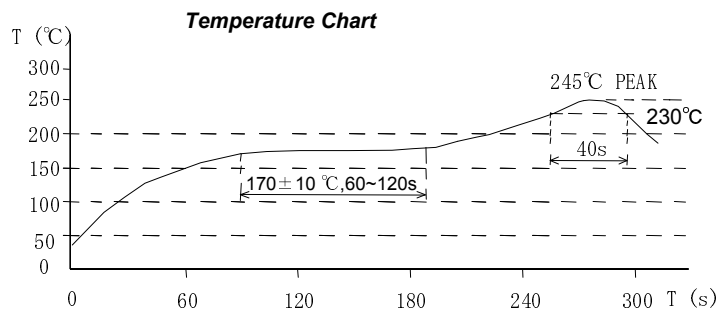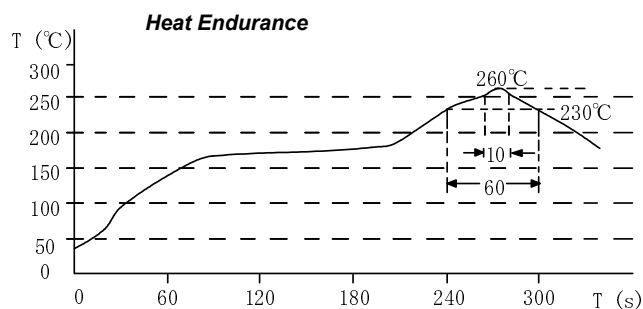

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sumida:

[CDRH8D28NP-4R7NC](#) [CDRH8D28NP-7R3NC](#) [CDRH8D28NP-100NC](#) [CDRH8D28NP-150NC](#) [CDRH8D28HPNP-3R3NC](#) [CDRH8D28HPNP-7R3NC](#) [CDRH8D28HPNP-100NC](#) [CDRH8D28HPNP-150NC](#) [CDRH8D28HPNP-220NC](#) [CDRH8D28HPNP-330NC](#) [CDRH8D28HPNP-470NC](#) [CDRH8D28HPNP-680NC](#) [CDRH8D28NP-680NC](#) [CDRH8D28NP-330NC](#) [CDRH8D28NP-101NC](#)