




AND END WITHIN AREA "A"

F. APPLY HEAT SHRINK TUBING OVER FERRULE.
G. HEAT SHRINK TUBING SHOULD FULLY (360 DEG) COVER THE BUMP ON BODY

6. RECOMMENDED COUPLING TORQUE : 4-6 IN-LBS.

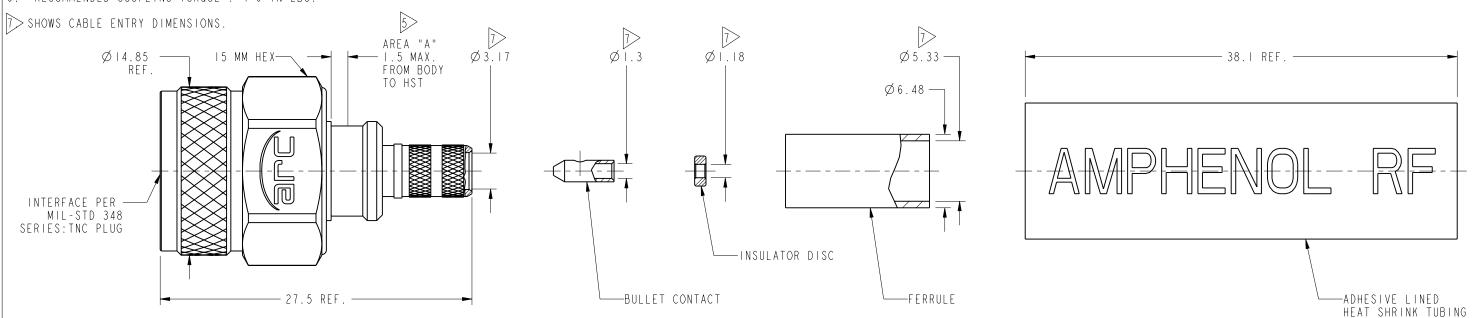

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  <0.5mm  0.5 - 6mm  6 - 30mm  30 - 120mm  ANGLES  ± 0.05mm  ±0.1mm  ±0.2mm  ± 0.3mm  ±1°	MATERIAL	DRAWN R.MAO	DATE 27-Feb-13	TITLE   STR IP-67 TNC,PL	Amphenol RF
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they		ENGINEER D.DAVE	D A T E 3 I - A u g - I I	FOR LMR-200 CABL	
former data by Amphenor Corp., or to any other person to anyone for any purpose is	REFERENCE	APPROVED	DATE		DRAWING NO.31-6499
not to be regarded by implication or otherwise in any manner licensing, granting   rights to permitting such holder or any other person to manufacture, use or sell any	AND CONFIGURATION LEVEL DOGG	S.HSIEH	27-Feb-13	SCALE: 4.0:1.0 SHEET 2 OF 2	ITEM NO. 31-6499
product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CONFIGURATION LEVEL:	CAD FILE		DWG SIZE RE	V
of discressed by said didnings, specifications, of other data.	FINISH			B E	PART NO. 31-6499

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 031-6499