
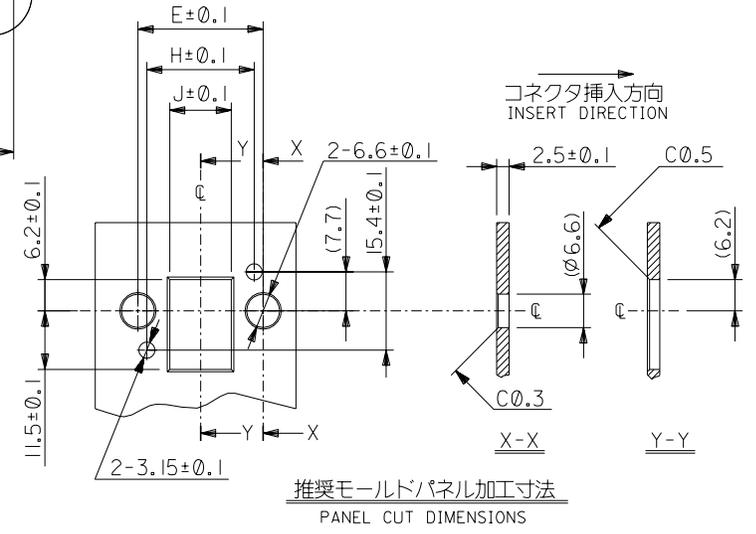
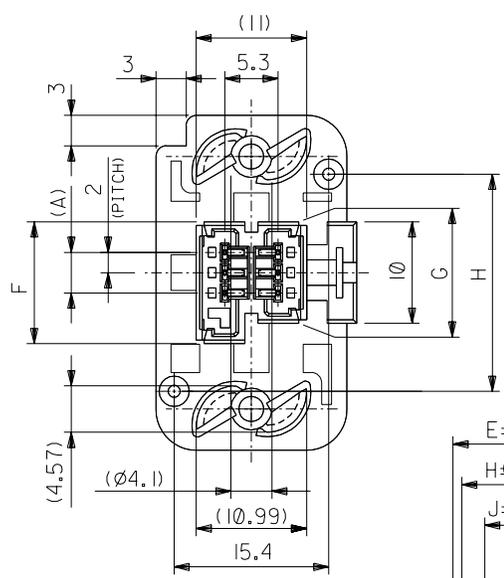
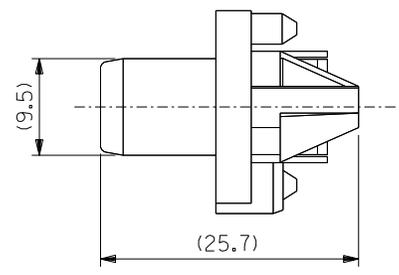
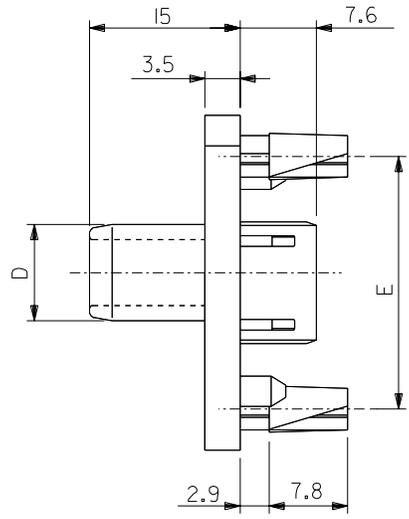


DWG. NO.  
SD-52968-008

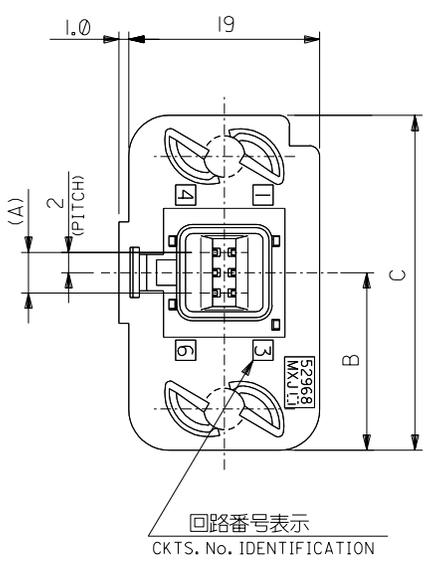

- 注)  
NOTES:
- 材質  
MATERIAL  
ハウジング: ポリカーボネート, UL94V-0 黒  
HOUSING: POLYCARBONATE, UL94V-0, BLACK  
ターミナル: リン青銅  
TERMINAL: PHOSPHOR BRONZE
  - ターミナルメッキ仕様  
TERMINAL PLATING  
金メッキ: 0.25µm MIN. (接点部)  
GOLD: 0.25µm MIN. (CONTACT AREA)  
錫メッキ: 1µm MIN. (リセプタクル嵌合部)  
TIN-LEAD: 1µm MIN. (RECEPTACLE CONNECTED AREA)  
ニッケルメッキ: 1µm MIN. (下地メッキ)  
NICKEL: 1µm MIN. (UNDER PLATING)
  - 適合リセプタクル: 52484-\*\*10, 51090-\*\*\*00  
APPLICABLE RECEPTACLE: 52484-\*\*10, 51090-\*\*\*00
  - 嵌合相手: 53717-\*\*19  
MATES WITH: 53717-\*\*19
  - 本製品は 52968-\*\*11 の鉛フリー品である。  
THIS PRODUCT IS LEAD FREE OF 52968-\*\*11.

12.3	21.4	10	12	24.9	9.5	33	17.5	4	52968-0619	52968-**19	6
J	H	G	F	E	D	C	B	(A)	MATERIAL NO.	MODEL NO.	CKT.

DO NOT SCALE DRAWING

64 NO. DRWN: CH'K: APPR:	63 NO. DRWN: CH'K: APPR:	62 NO. DRWN: CH'K: APPR:	61 NO. DRWN: CH'K: APPR:	60 NO. J2004-2419 DRWN: M. NINOMIYA CHK: K. TOJO APPR: M. SASAO	0 REV
RELEASED '04/02/13 MATERIAL 材料 SEE NOTE FINISH 仕上げ SEE NOTE WIRE RANGE 適用電線範囲 # INS. RANGE 被覆外径 #					

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input type="checkbox"/> mm ONLY	SHT REV
10 UNDER 未満 ±0.2 10 OVER 30 UNDER 未満 ±0.25 30 OVER 以上 ±0.3	DRAWN BY & DATE M.NINOMIYA '04/02/13	TITLE: 2mm PITCH FLOATING CONN. REC. HS'G ASS'Y -LEAD FREE-		
ANGLE 角度 ±3°	CHECKED BY & DATE K.TOJO '04/02/13	MOLEX MOLEX INCORPORATED		
APPROVED BY & DATE M.SASAO '04/02/13		MATERIAL NO. SEE CHART	DRAWING NO. SD-52968-008	SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

EN-02J(097) MXJ-54

SD-52968-008-59

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52968-0619](#)