


USB "A" to USB "B" Cable

172-1024-E



USB "A" to USB "B" Cable

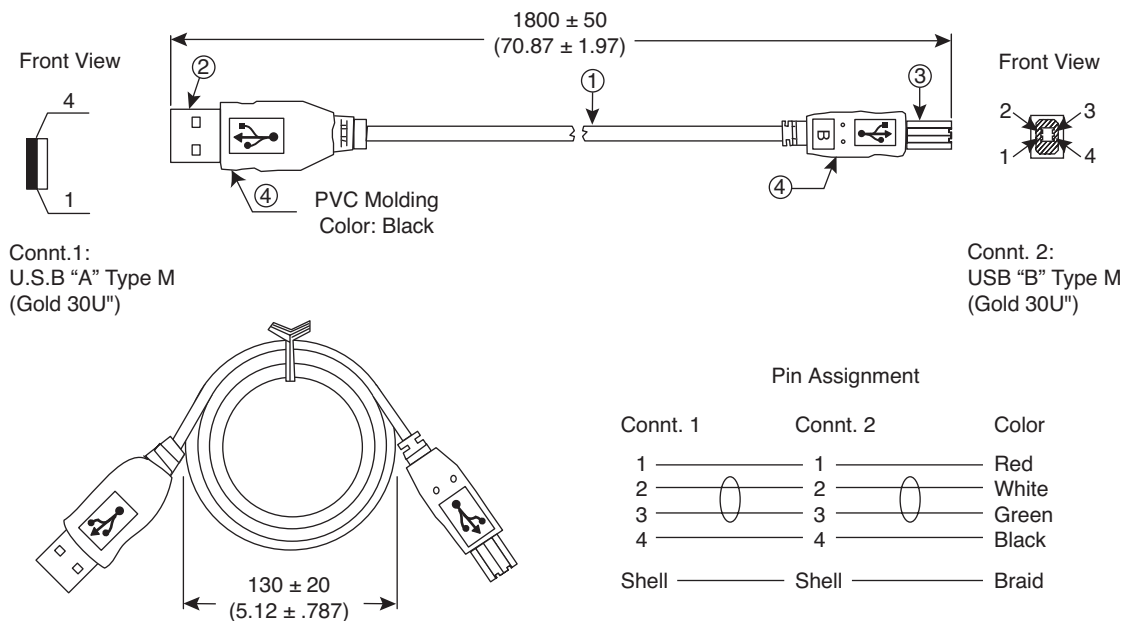

SPECIFICATIONS

(4) PVC Molding:	black 50P
(3) Connt. 2:	USB "B" type male
(2) Connt. 1:	USB "A" type male
(1) Cable:	28AWG/1P+24AWG/2C+AEB Rev: 2.0 Jacket color: black OD: 4.7 ± 0.1mm
RoHS Compliant	

ELECTRICAL SPECIFICATIONS

Contact resistance:	2Ω max.
Insulation resistance:	5 Mega Ω min.
Hi-pot:	300VDC/10ms
100% open short mis-wire test	

Date Last Revised: 8-21-06

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC- 301042

172-1024-E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[172-1024-E](#)