

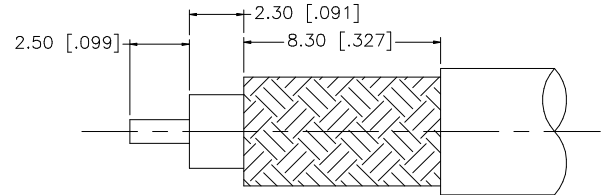
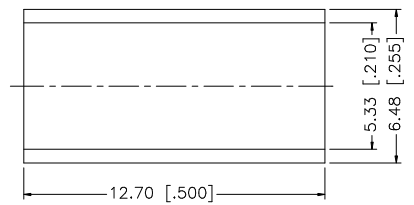
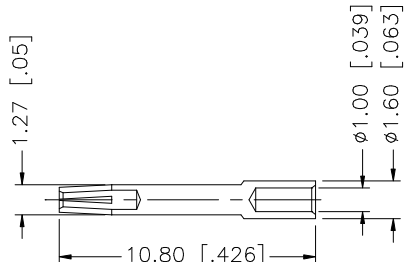


REV.	DATE	DESCRIPTION
NC	09/27/06	INITIAL RELEASE

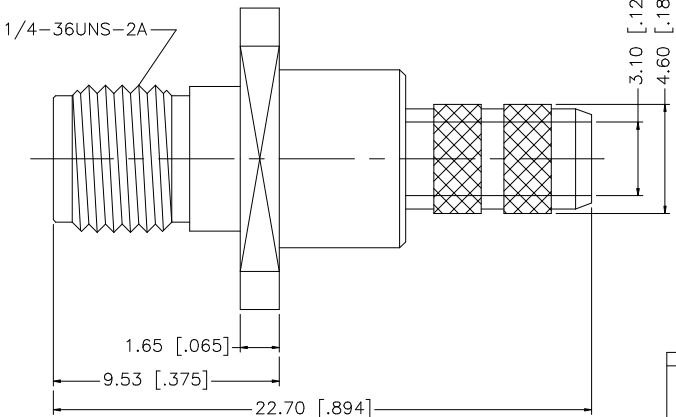

RECOMMENDED CABLE
STRIPPING DIMS.

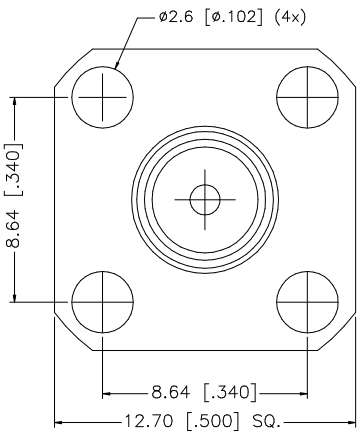

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	09/27/06						
6						CHECKED				PART DESCRIPTION SMA PANEL CRIMP JACK (FOR RG-58/U CABLE)				
5						ISSUED								
4	FERRULE	COPPER	GOLD	1		SHEET		1 OF 1		PART NO. 132120				
3	CONTACT PIN	BER. COPPER	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO. 132120.DWG REV. NC SIZE A SCALE NA				
1	BODY	BRASS	GOLD	1										
DESCRIPTION MATERIAL FINISH QTY					DO NOT SCALE DRAWING		CAD FILE C:/132/132120.DWG							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132120](#)