MPSA75 MPSA76 MPSA77

SILICON PNP DARLINGTON TRANSISTORS




www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR MPSA75 series devices are silicon PNP Darlington transistors, manufactured by the epitaxial planar process, designed for applications requiring extremely high gain.

MARKING: FULL PART NUMBER




Collector-Base Collector-Em Emitter-Base Continuous C Power Dissip	itter Voltage Voltage Collector Current	V _C V _C V _E I	IBOL CES EBO C C	MPSA75 40 40	50 50 10 500 625 -65 to +15		PSA77 60 60	UNITS V V V mA mW °C
Thermal Res	istance	Θ	JA		200			°C/W
ELECTRICA SYMBOL ICBO	L CHARACTERISTICS: (T _A =25°C) TEST CONDITIONS V _{CB} =30V	MPS MIN	SA75 MAX 100	MPS MIN	A76 MAX	MPS MIN	SA77 MAX	UNITS nA
I _{CBO}	V _{CB} =40V	_	-	-	100	_	_	nA
ICBO	V _{CB} =50V	-	-	-	-	-	100	nA
ICES	V _{CE} =30V	-	500	-	-	-	-	nA
I _{CES}	V _{CB} =40V	-	-	-	500	-	-	nA
ICES	V _{CB} =50V	-	-	-	-	-	500	nA
I _{EBO}	V _{EB} =10V	-	100	-	100	-	100	nA
BV _{CBO}	I _C =100μA	40	-	50	-	60	-	V
BVCES	I _C =100μA	40	-	50	-	60	-	V
V _{CE(SAT)}	I _C =100mA, I _B =0.1mA	-	1.5	-	1.5	-	1.5	V
V _{BE(ON)}	V_{CE} =5.0V, I_{B} =100mA	-	2.0	-	2.0	-	2.0	V
hFE	V_{CE} =5.0V, I_{C} =10mA	10K	-	10K	-	10K	-	
h _{FE}	V_{CE} =5.0V, I_{C} =100mA	10K	-	10K	-	10K	-	
f_{T}	V_{CE} =5.0V, I_{C} =10mA	125	-	125	-	125	-	MHz

MPSA75 MPSA76 MPSA77





TO-92 CASE - MECHANICAL OUTLINE

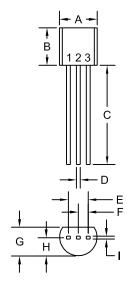

DIMENSIONS								
	INCHES		MILLIMETERS					
SYMBOL	MIN	MAX	MIN	MAX				
A (DIA)	0.175 0.205		4.45	5.21				
В	B 0.170		4.32	5.33				
С	0.500	-	12.70	-				
D	0.016	0.022	0.41	0.56				
Е	0.1	100	2.54					
F	0.0)50	1.27					
G	0.125	0.165	3.18	4.19				
Н	0.080	0.105	2.03	2.67				
	0.0)15	0.38					

TO-92 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING:

R1


FULL PART NUMBER

MPSA75 MPSA76 MPSA77





TYPICAL ELECTRICAL CHARACTERISTICS

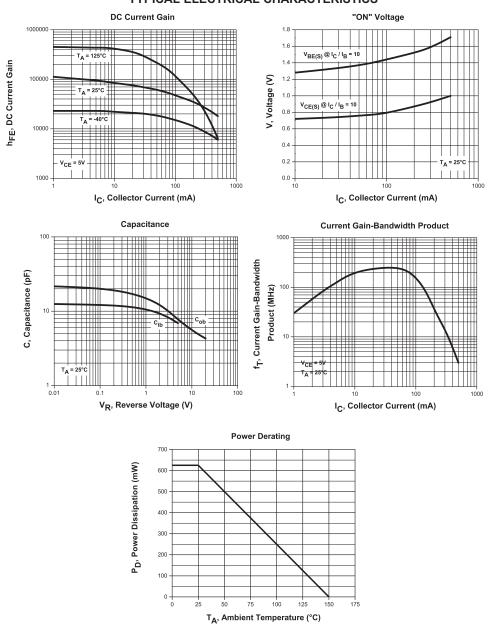

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

www.centralsemi.com (001)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor: MPSA77