
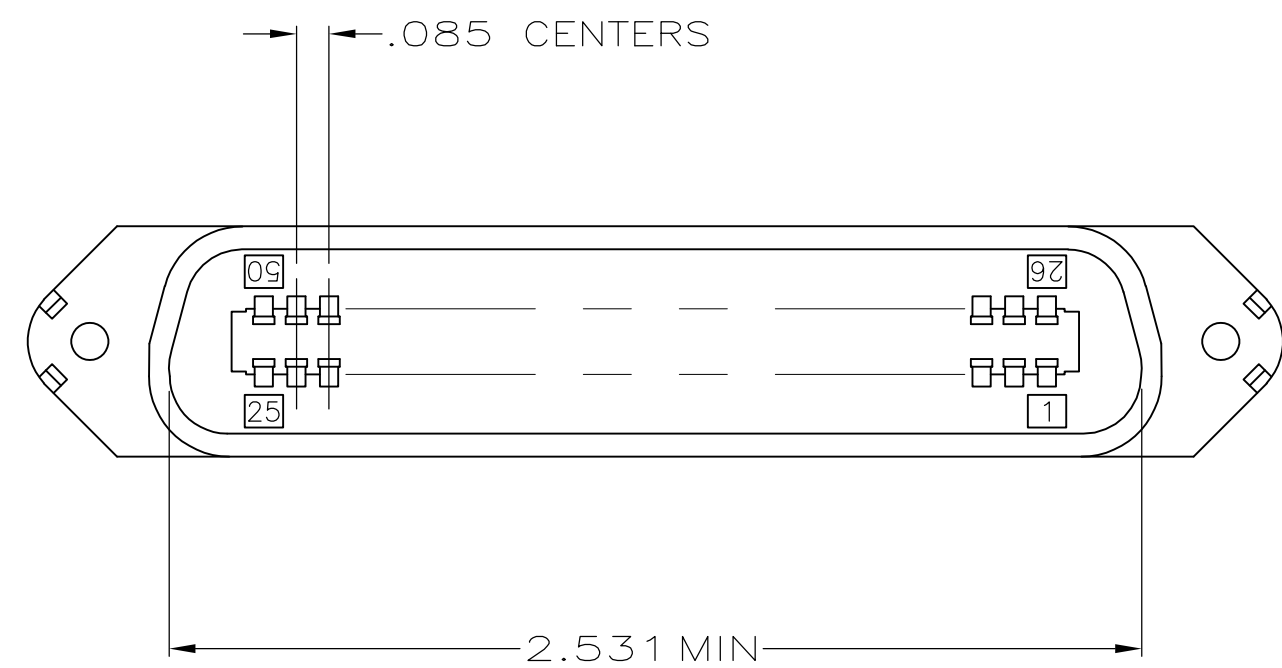
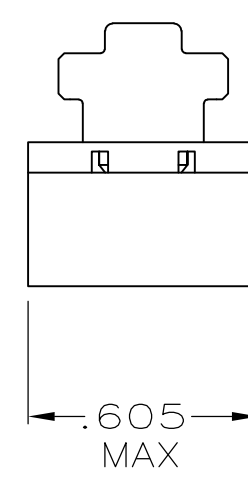
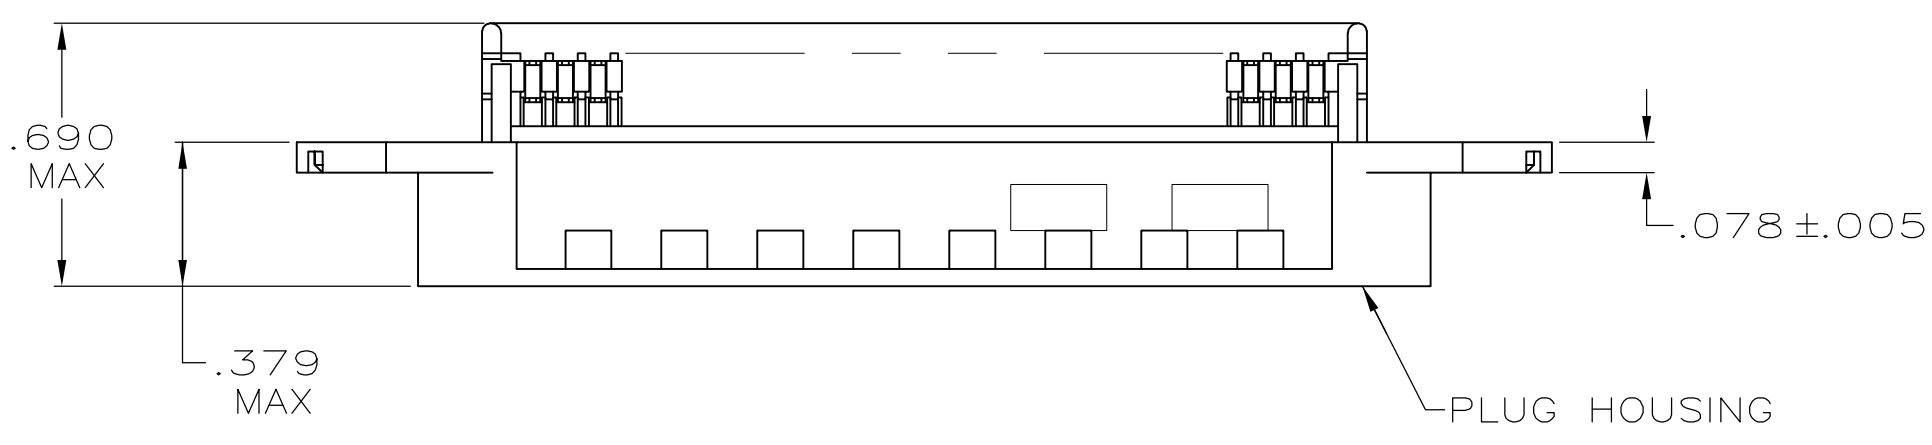


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		F	REVISED PER ECO-08-007327	05SEP08	BM	WM

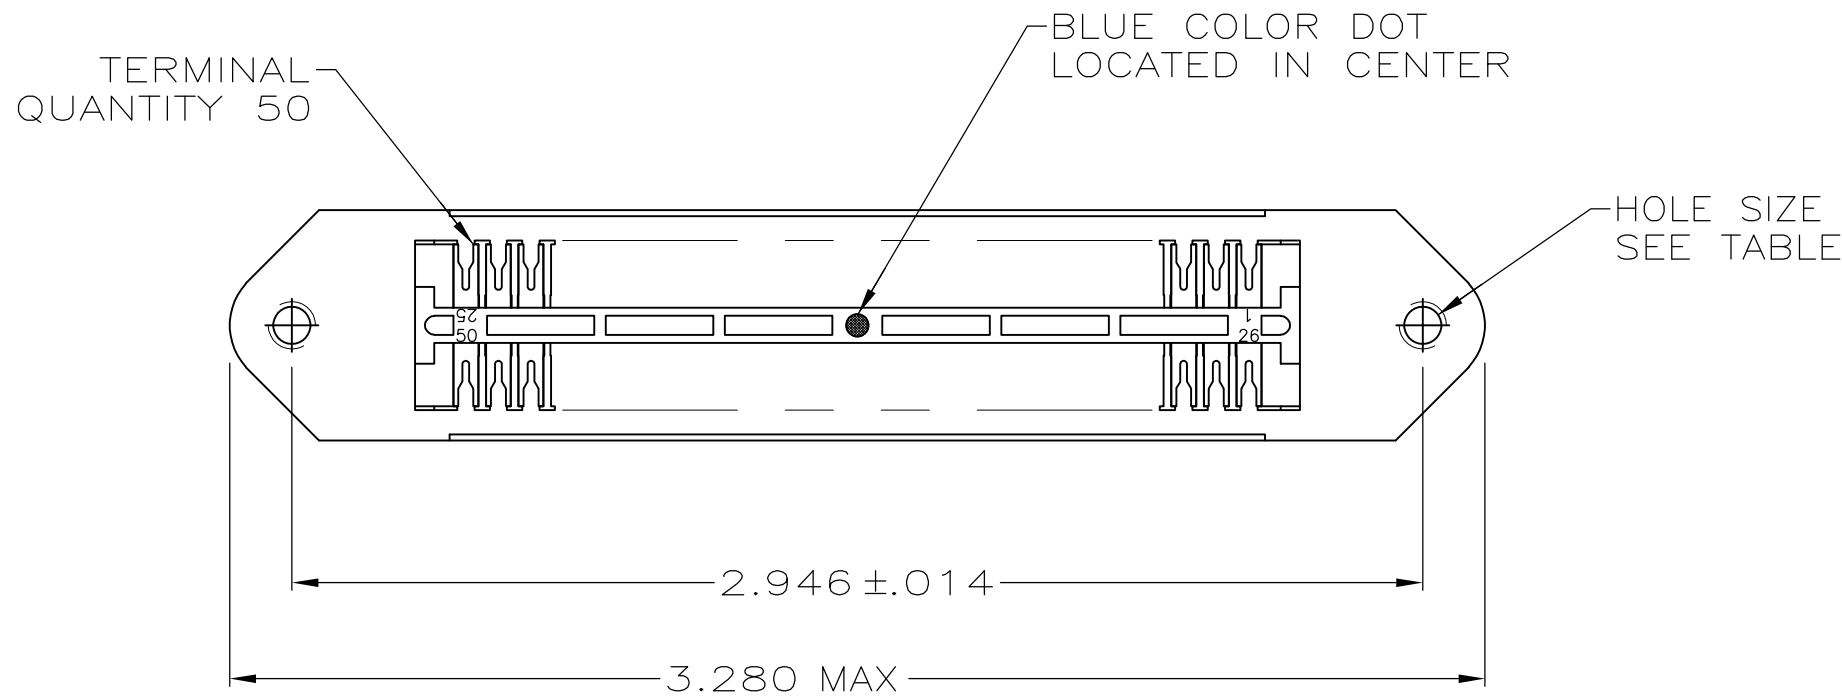

- 1 . THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- 2 MATERIAL: HOUSING – POLYPHENYLENE OXIDE (BLACK).
TERMINAL – HIGH STRENGTH COPPER ALLOY PLATED WITH .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, .000030 MIN TOTAL ON MATING SURFACE, .000050 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
3. WIRE SIZE: 24 OR 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
- 4 2 HOLES TAPPED, 4-40 UNC-2B
- 5 2 HOLES TAPPED, M3.5 x 0.6-6G

5	554338-2
4	554338-1
HOLE SIZE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN MD BYERLY 27-OCT-83	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK MD FRIEL 30-NOV-83				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. FOSTER 03-JAN-84	NAME		
	0 PLC ± -		PRODUCT SPEC	EMI PLUG ASSEMBLY, 50 POSITION, SCREW LOCK, B-SLOT, W/ TAPPED HOLES, CHAMP		
	1 PLC ± -		APPLICATION SPEC			
MATERIAL	FINISH		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=554338
	CUSTOMER DRAWING		SCALE 2:1	SHEET 1 of 1	REV F	RESTRICTED TO -

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[554338-1](#)