
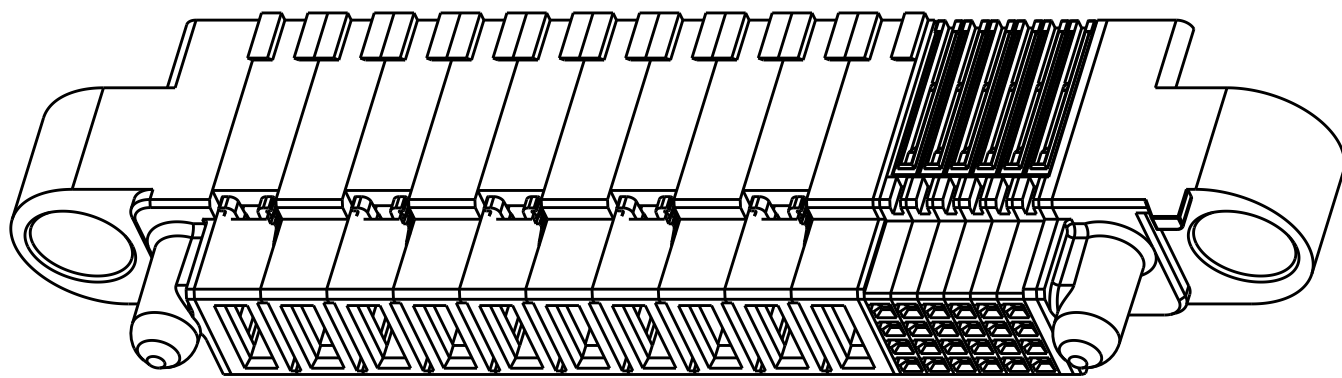
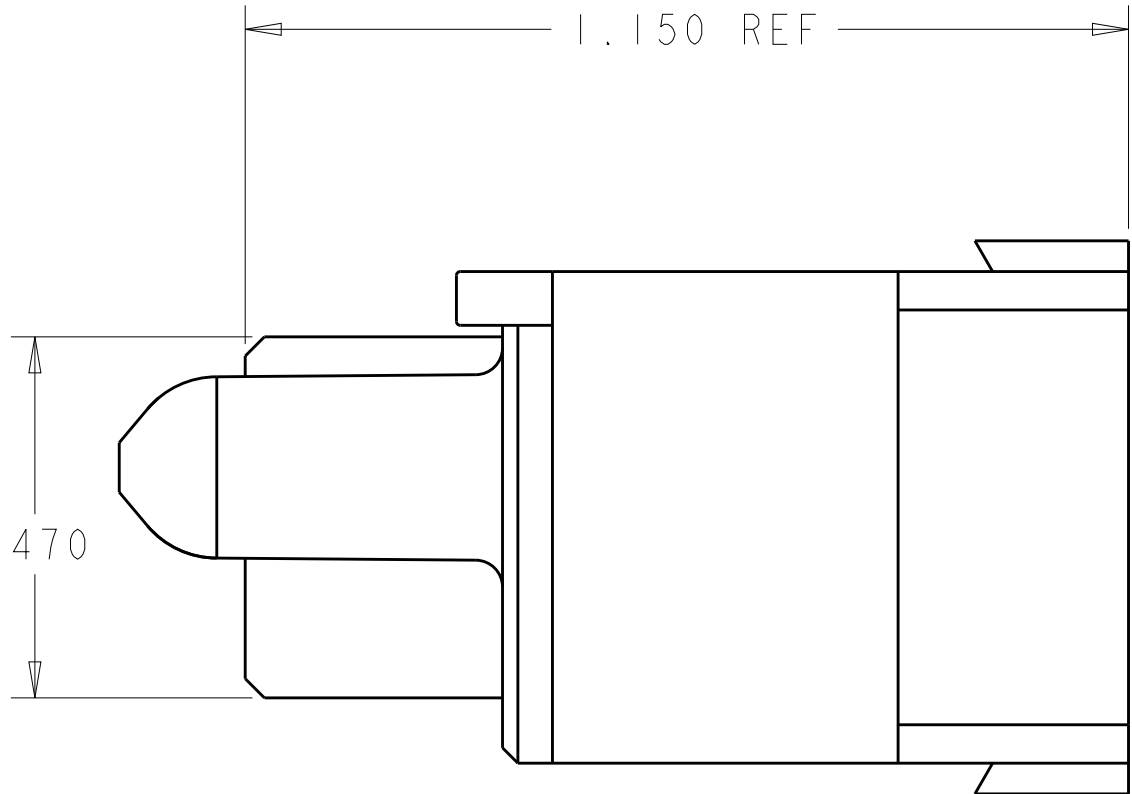
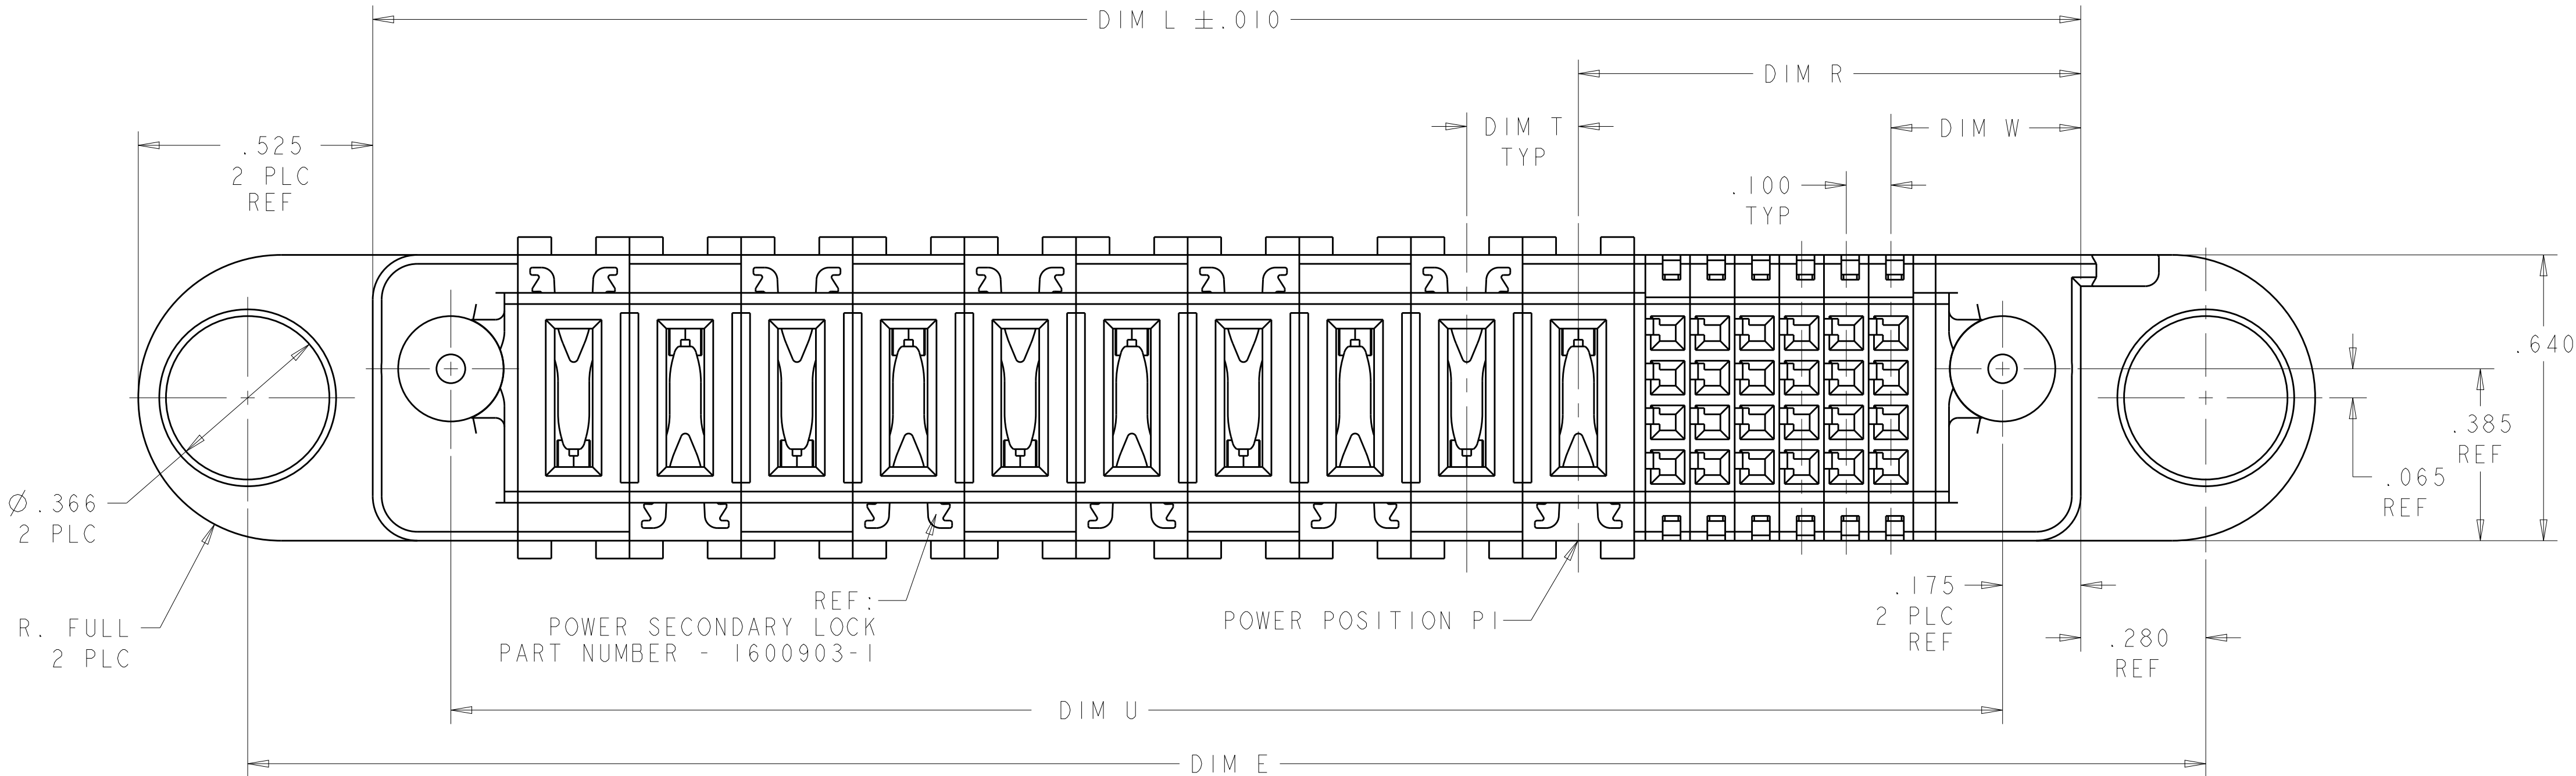


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A4	ADDED NEW DASH NUMBER -9 AND I-0	24SEP2012	CZ	SZ
			A6	ADD NEW DASH NUMBER I-1	15DEC2014	CZ	SZ

- 1 COMPANY TRADEMARK, PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL: THERMO PLASTIC, UL94 V-0.
- 3 DATUM LOCATIONS AND BASIC DIMENSIONS TO BE ESTABLISHED BY THE CUSTOMER.
- 4 BULKHEAD THICKNESS RANGE: .031 - .100.
- 5 CONNECTOR MATED TO PANEL FROM OPPOSITE SIDE.
- 6 NO BURRS ALLOWED ON OPPOSITE (MATING) SIDE.
- 7 CONNECTOR KEEP OUT ZONE.
- 8 MOUNT CONNECTOR WITH TYCO HARDWARE KIT I600914-3 FOR .050 (1.27mm) MIN RADIAL FLOAT.
- 9 VARIABLE DIMENSIONS PLEASE REFER TO BOM TABLE FOR DETAIL.

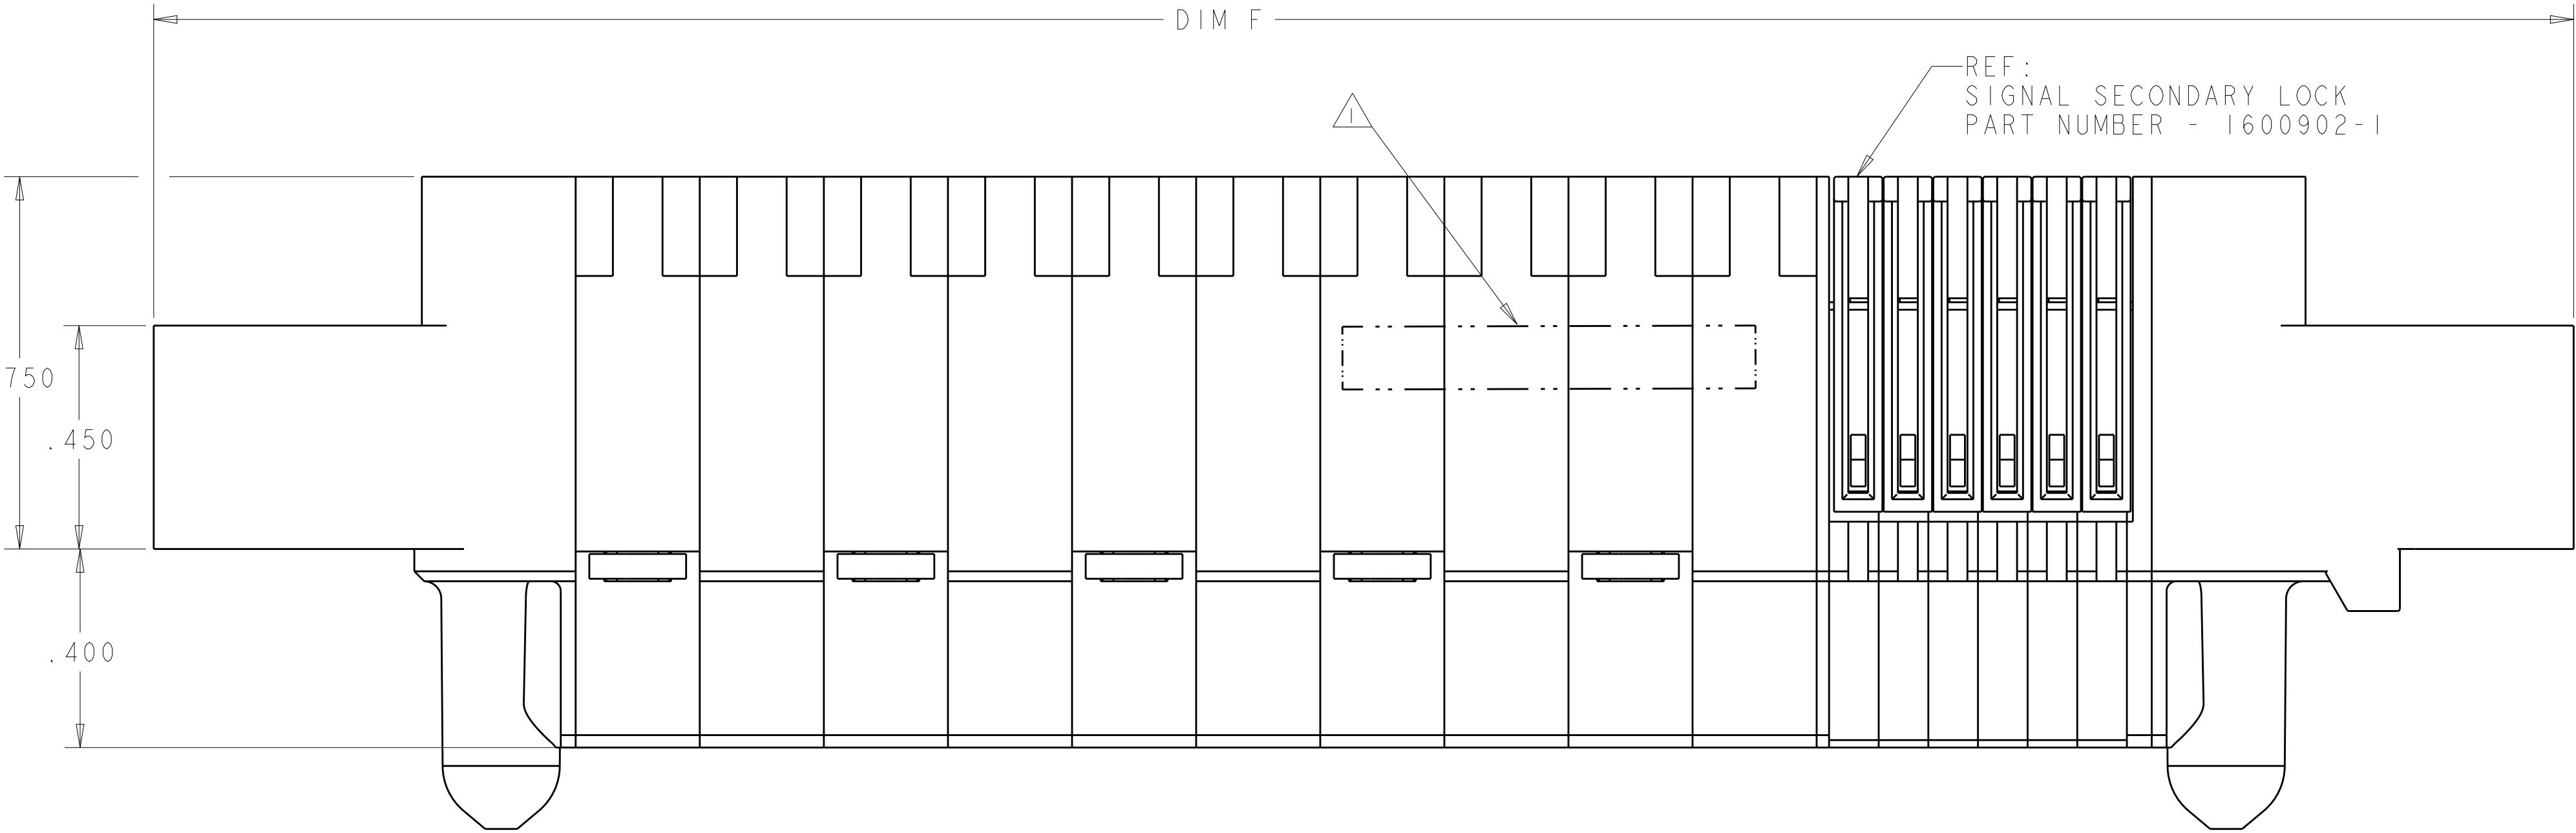

ISOMETRIC VIEW
SCALE 3:2

.400	1.825	-	-	2.175	3.225	2.735	OP + 60S + OP	I-1600626-1
.425	1.775	.250	.925	2.125	3.175	2.685	OP + 16S + 4P	I-1600626-0
.425	1.675	.250	.825	2.025	3.075	2.585	OP + 12S + 4P	1600626-9
.375	1.600	.250	.750	1.950	3.000	2.510	OP + 12S + 4P	1600626-6
.425	3.700	9	1.175	4.050	5.100	4.610	24S + 3ACP + 7P	1600626-5
.425	2.500	.500	.875	2.850	3.900	3.410	OP + 12S + 4ACP	1600626-4
.425	3.100	.300	.875	3.450	4.500	4.010	OP + 12S + 8ACP	1600626-3
.425	3.200	.300	1.575	3.550	4.600	4.110	OP + 40S + 6ACP	1600626-2
.425	3.475	.250	1.125	3.825	4.875	4.385	OP + 24S + 10P	1600626-1
DIM W	DIM U	DIM T	DIM R	DIM L	DIM F	DIM E	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

2

DWN
D. RINGLER
CHK
M. CORRELL
APVD

16SEP2003
18SEP2003

PRODUCT SPEC
108-2157
APPLICATION SPEC
114-13112

WEIGHT

CUSTOMER DRAWING

NAME

SIZE
A1

CAGE CODE
00779

DRAWING NO
1600626

RESTRICTED TO

SCALE
4:1

SHEET
1













OF
3







REV
A6



















TE Connectivity



















PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-







PART NUMBER	ROWS		POWER										SIGNAL						
			P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	6	5	4	3	2	1	
1600626-1	D												E	E	E	E	E	E	
	E												E	E	E	E	E	E	
	E												E	E	E	E	E	E	
	E												E	E	E	E	E	E	
0P + 24S + 10P																			


PART NUMBER	ROWS		POWER						SIGNAL										
			P6	P5	P4	P3	P2	P1	I0	9	8	7	6	5	4	3	2	1	
1600626-2	D							E	E	E	E	E	E	E	E	E	E		
	E							E	E	E	E	E	E	E	E	E			
	E							E	E	E	E	E	E	E	E	E			
	E							E	E	E	E	E	E	E	E	E			
OP + 40S + 6ACP																			

PART NUMBER	ROWS		POWER								SIGNAL									
			P8	P7	P6	P5	P4	P3	P2	P1	3	2	1							
1600626-3	D												E							
												E								
												E								
												E								
OP + 12S + 8ACP																				
			<div>NO CONTACTS LOADED</div> <div>NO CONTACTS LOADED</div>																	

PART NUMBER	ROWS		POWER				SIGNAL			
			P4	P3	P2	P1	3	2	1	
1600626-4	D									
										
										
										
A										
OP + 12S + 4ACP										

PART NUMBER	ROWS		POWER										SIGNAL																			
			PI0	P9	P8	P7	P6	P5	P4	P3	P2	PI	6	5	4	3	2	1														
1600626-5	D															E	E	E	E	E	E											
	E															E	E	E	E	E												
	E															E	E	E	E	E												
	E															E	E	E	E	E												
24S + 3ACP + 7P																																
			.250 6 PLC													.300 2 PLC							.325									

PART NUMBER	ROWS		POWER				SIGNAL			
			P4	P3	P2	P1	3	2	1	
1600626-4	D						E	E	E	
	E						E	E		
	E						E	E		
	E						E	E		
OP + 12S + 4P										

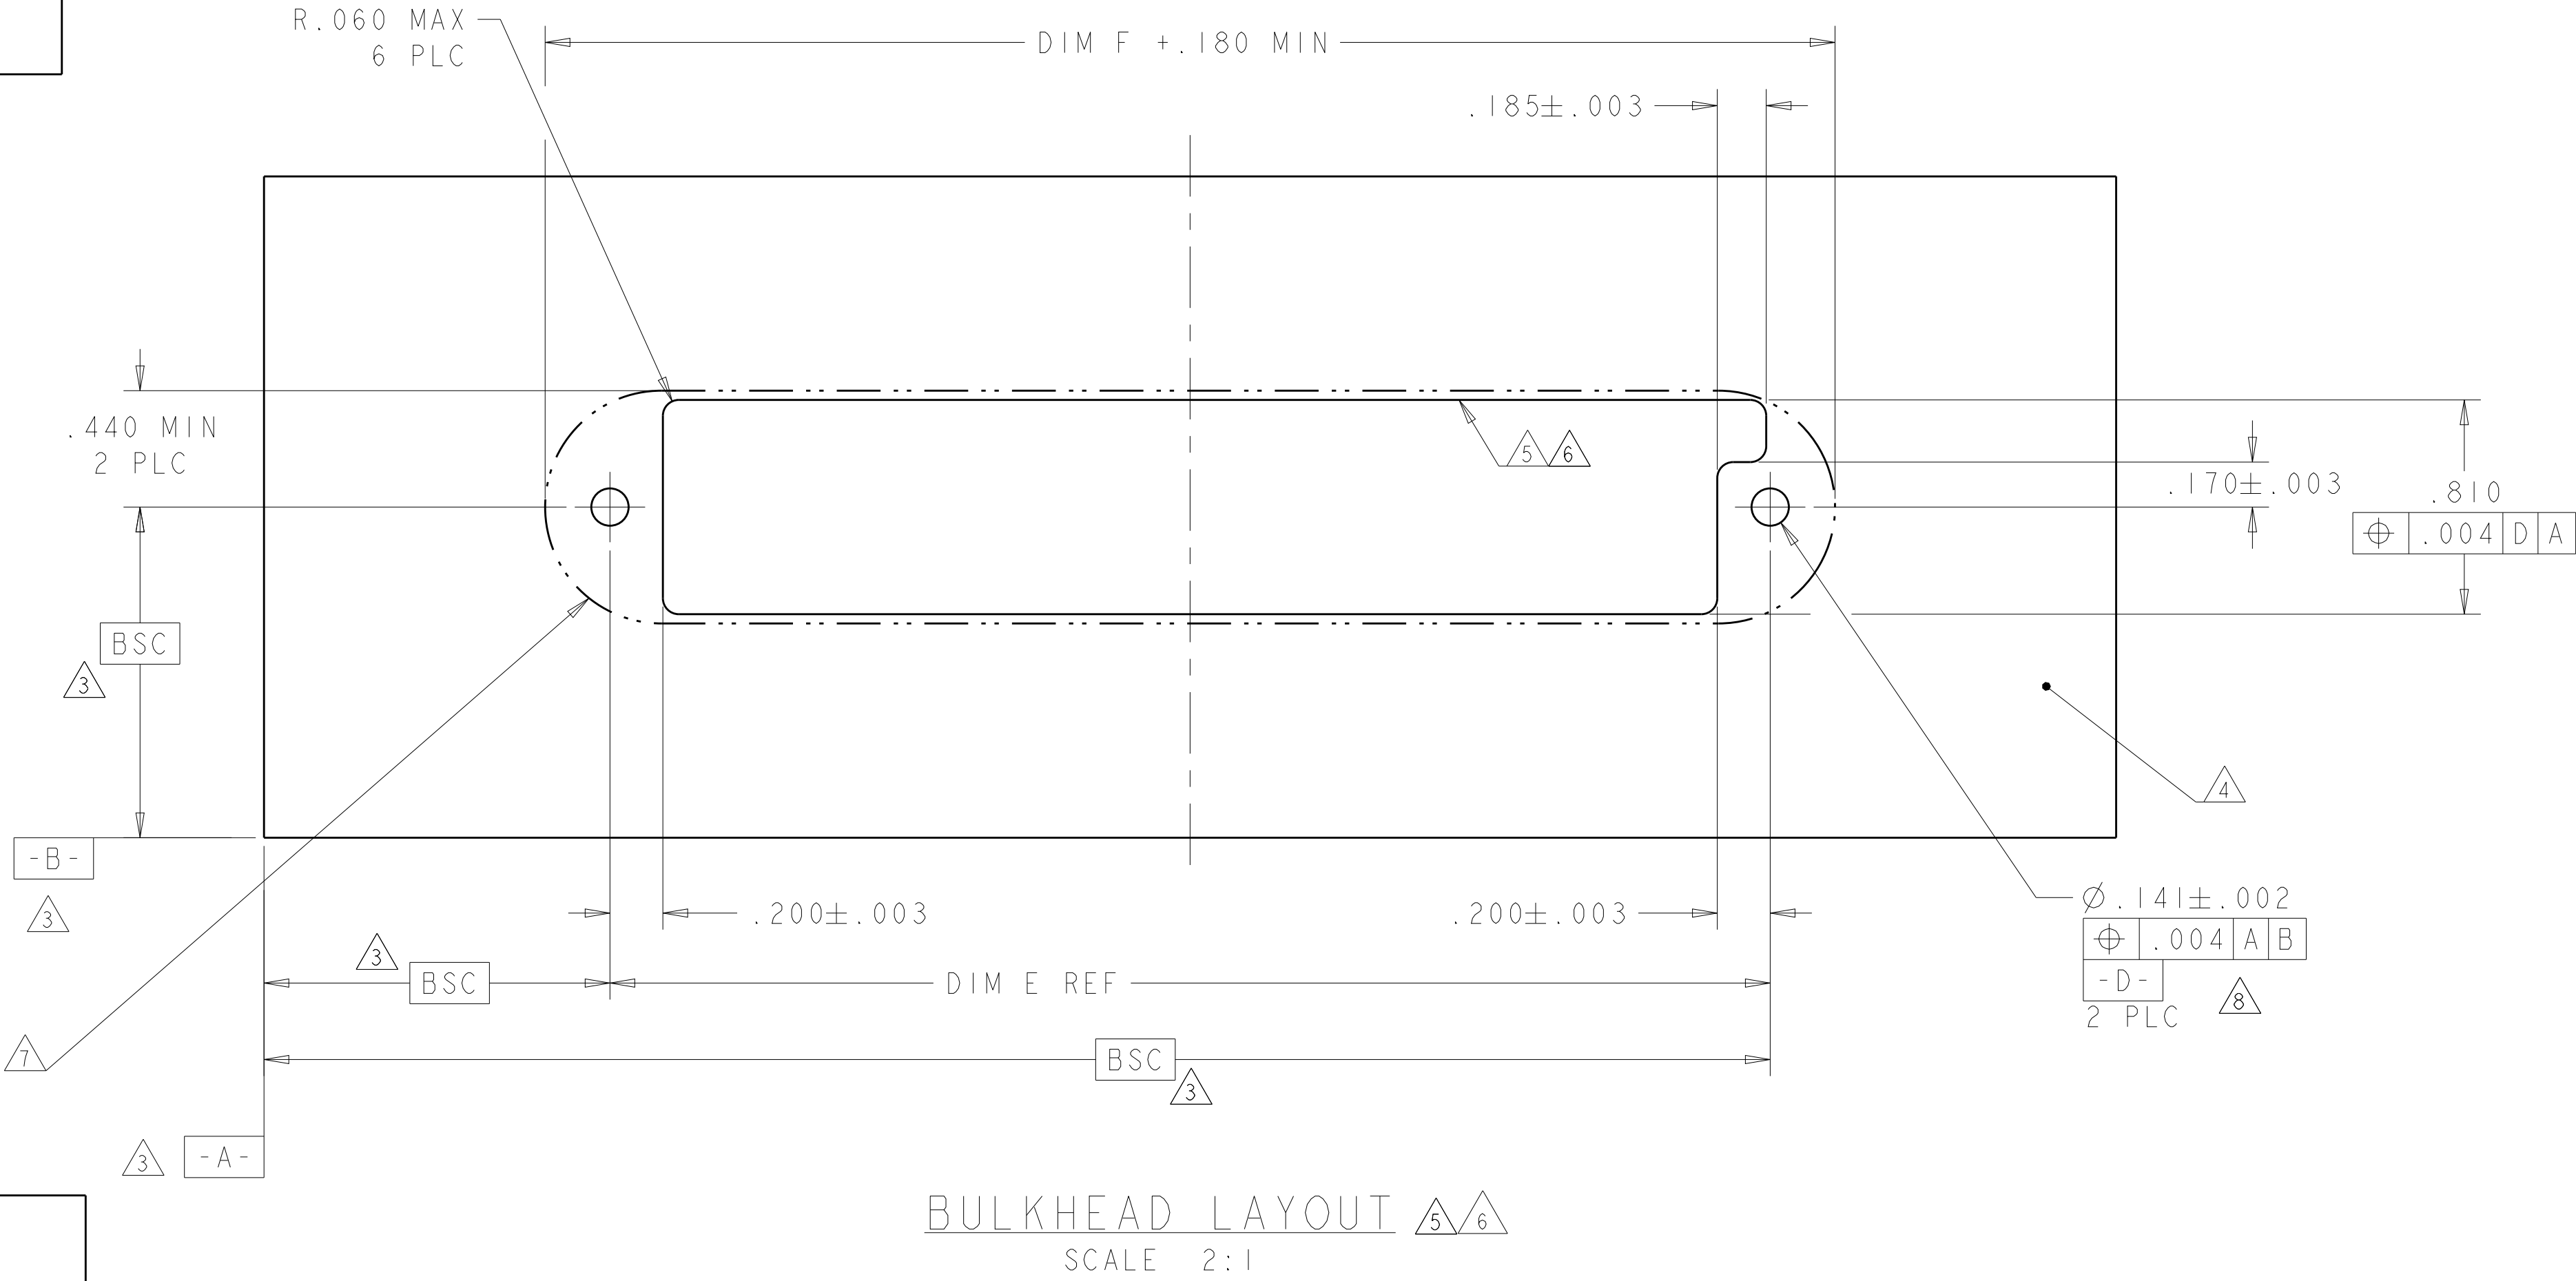

REFERENCE WIRE CHART AND CONTACTS		
HOUSING MODULE	CONTACT	INSULATION DIAMETER RANGE
.300 POWER	8-10 1600960 REF	[.176 - .272]
.250 POWER	8-10 1600960 REF	[.176 - .203]
	12-14 1600961 REF	[.156 - .176]
.200 POWER	12-14 1600961 REF	[.120 - .156]
.100 SIGNAL	22 - 26 531216-5 REF	[.036 - .069]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.RINGLER CHK M.CORRELL APVD	16SEP2003 18SEP2003		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2157	
		2 PLC ±.005		APPLICATION SPEC	
		3 PLC ±.0020		114-13112	
		ANGLES ±2°		WEIGHT	
MATERIAL		FINISH		CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A100779C=1600626	
				REV	
				A6	

RM	STANDARD POWER CONTACT
RA	MFBL POWER CONTACT
E	SIGNAL CONTACT
CODE	DESCRIPTION
CONTACT TABLE	

TE TE Connectivity

PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SCALE

SHEET







OF







3



REV



A6

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL			
			P4	P3	P2	P1	3	2	1	
1600626-9	D						E	E	E	
	C						E	E	E	
	B						E	E	E	
	A						E	E	E	
0P + 12S + 4P										

PART NUMBER	ROWS		POWER				SIGNAL				
			P4	P3	P2	P1	4	3	2	1	
I-1600626-0	D						E	E	E	E	
	C						E	E	E	E	
	B						E	E	E	E	
	A						E	E	E	E	
							E	E	E	E	
0P + 16S + 4P											

PART NUMBER	ROWS		SIGNAL															
			15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
1-1600626-1	D		E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	
	C		E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	B		E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	
	A		E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	
0P + 60S + 0P																		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.RINGLER 16SEP2003	 TE Connectivity	
		CHK M.CORRELL 18SEP2003		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±" 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH	NAME	
		PRODUCT SPEC 108-2157 APPLICATION SPEC 114-13112	PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL	
			SIZE A1	CAGE CODE 00779
MATERIAL -		WEIGHT -	DRAWING NO C=1600626	
		CUSTOMER DRAWING		RESTRICTED TO -
		SCALE 4:1	SHEET 3	OF 3
		REV A6		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1600626-4](#)