

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

APRIL , 2004.

LOC


	DIST
--	------

REVISIONS


© COPYRIGHT 2004 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

NOTES:

- 1 SINGLE PACK IN ACCORDANCE WITH SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH SPEC 107-3275
- 3 0.08 μ m Au PLATING OVER 1.27 μ m Ni PLATING
- 4 0.08 μ m Au PLATING OVER 1.27 μ m Ni PLATING OVER 0.76 μ m Cu PLATING
- 5 0.76 μ m Au PLATING OVER 1.27 μ m Ni PLATING OVER 0.76 μ m Cu PLATING
- 6 FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- 7 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

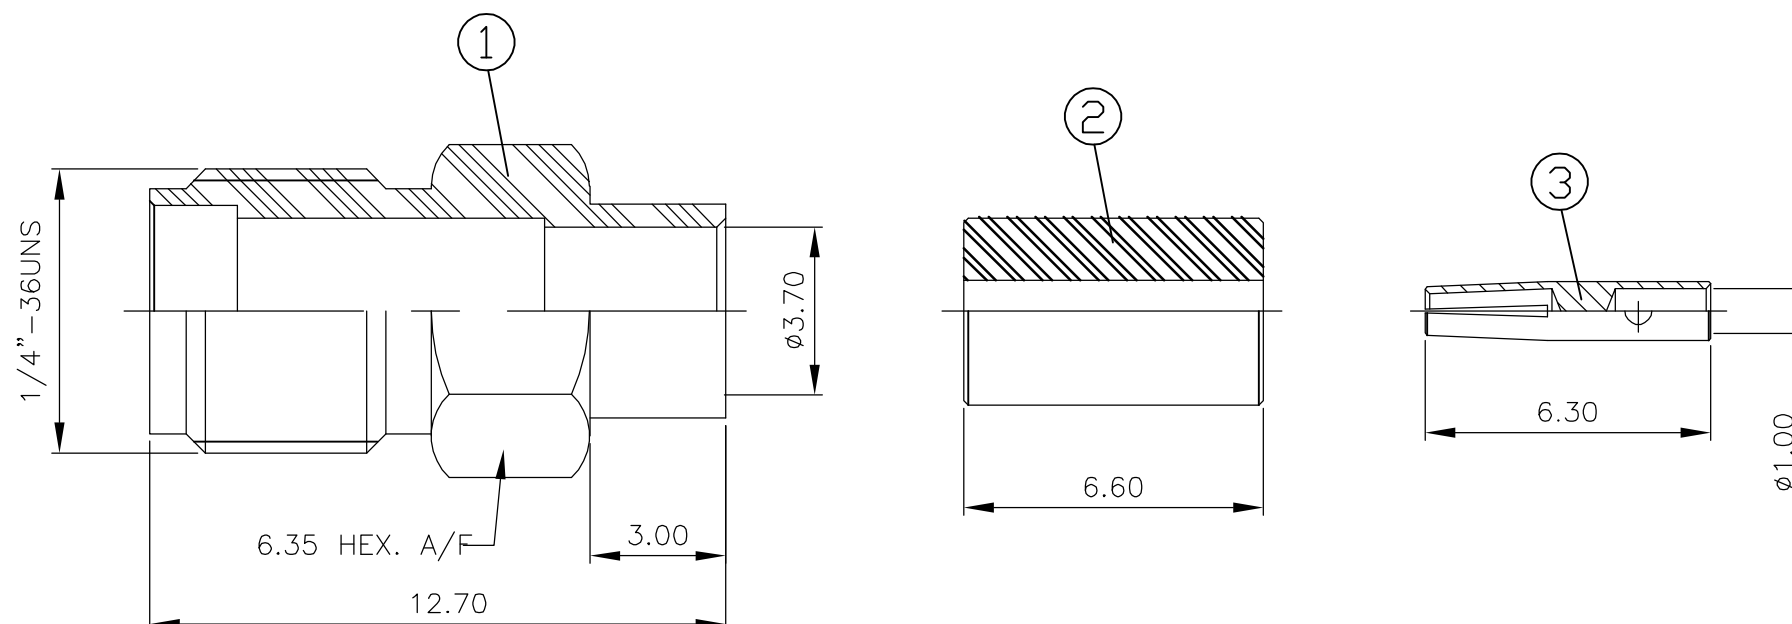

RECOMMENDED
CABLE STRIPPING DIM'S

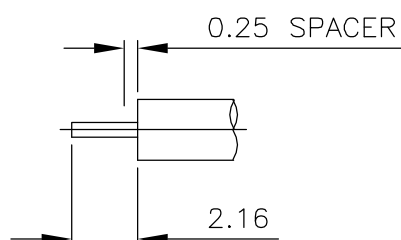

				1	1	1	1	PTFE	INSULATOR	3
				1	1	1	1	BERYLLIUM COPPER 	SOCKET	2
				1	1	—	—	BRASS 	BODY	1
				—	—	1	1	STAINLESS STEEL 	BODY	1
				3--1	3--0	1--1	1--0	MATERIAL	DESCRIPTION	ITEM
										
QUANTITY PER ASSY								PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.SMITH 30JAN04		 Tyco Electronics Corporation  Bideford, UK, EX39 4HE	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		CHK S.PARLOW 30JAN04		SMA STRAIGHT JACK DIRECT SOLDER NON CAPTIVE CENTRE CONTACT RG402/U	
		APVD F.WHEELER-KING 30JAN04			
		PRODUCT SPEC 108-3460			
		APPLICATION SPEC 411-3276			
MATERIAL SEE TABLE		FINISH —		SIZE A3	CAGE CODE 00779
		WEIGHT —		DRAWING NO C-1478928	
CUSTOMER DRAWING				SCALE 1:1	SHEET 1 OF 1
				REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1478928-0](#)