

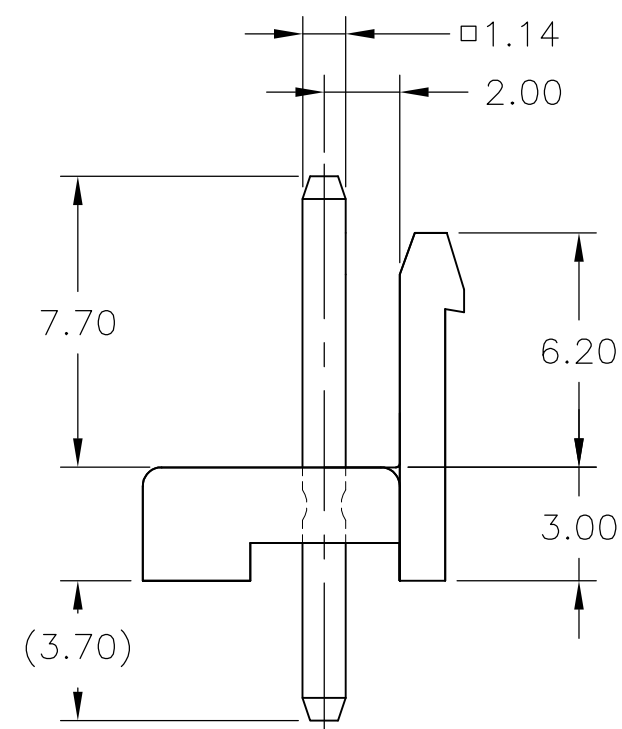
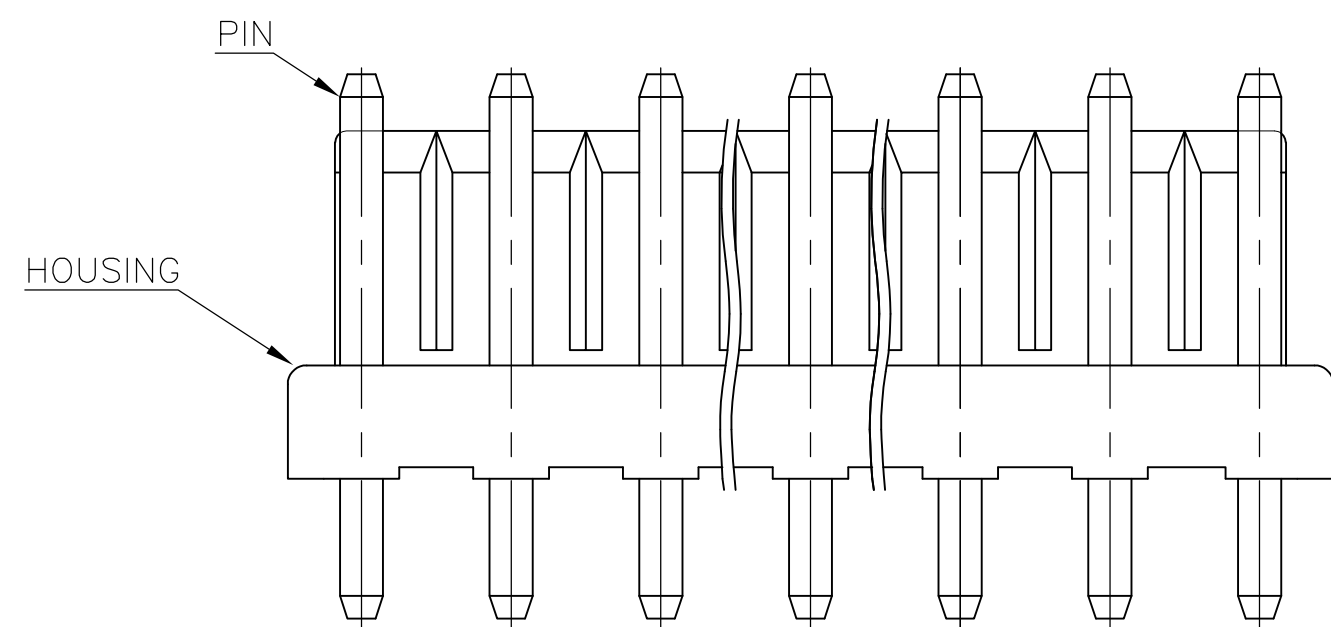



FIG. 1

- 1 MATING CONN P/N: □-1123722-□
- 2 APPLICABLE P.C.B LAYOUT: SEE FIG. 1
- 3 APPLICABLE P.C.B THICKNESS: 1.60
- 4 SKETCHES SHOW NO PINS MISSING.
- 5 COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALIC MATERIAL SUPPORTING A CURRENT CARRYING CONNECTION DETAILED IN IEC 60335-1 SECTION 30 (GWT [GLOW WIRE TEST]) 750° SPEC.
- 6 PIN: POST TIN OVER BRASS
- 7 HOUSING: PBT, 30% GLASS, UL94-V0.
- 8 ○ : WITH PIN,
X : WITHOUT PIN.
- 9 HOUSING: NYLON, 15% GLASS, UL94-V2

YES													11.88	13.28	15.78	NATURAL	4	8-1473057-2
													7.92	9.32	11.82	NATURAL		7-1473057-2
NO													7.92	13.28	15.78	NATURAL		2-1473057-2
																NATURAL		1-1473057-2
GWT 	HOUSING MATERIAL	1	2	3	4	5	6	7	8	9	10	11	"C"	"B"	"A"	COLOR	POSN	ASS'Y P/N
PIN POSITION 													DIMENSION					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. YAMADA	07SEP2004	 TE Connectivity			
		CHK N. YAMASAKI	07SEP2004				
		APVD N. YAMASAKI	07SEP2004				
		NAME					
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 0.50 2 PLC ± 0.30 3 PLC ± 4 PLC ± ANGLES ± FINISH		ECONOMY POWER (EP) CONN HEADER ASS'Y 7.92mm PITCH 2POS SPECIAL			
MATERIAL SEE TABLE 		APPLICATION SPEC — WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C-1473057	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 5:1	SHEET 1 OF 1	REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1473057-2](#)