



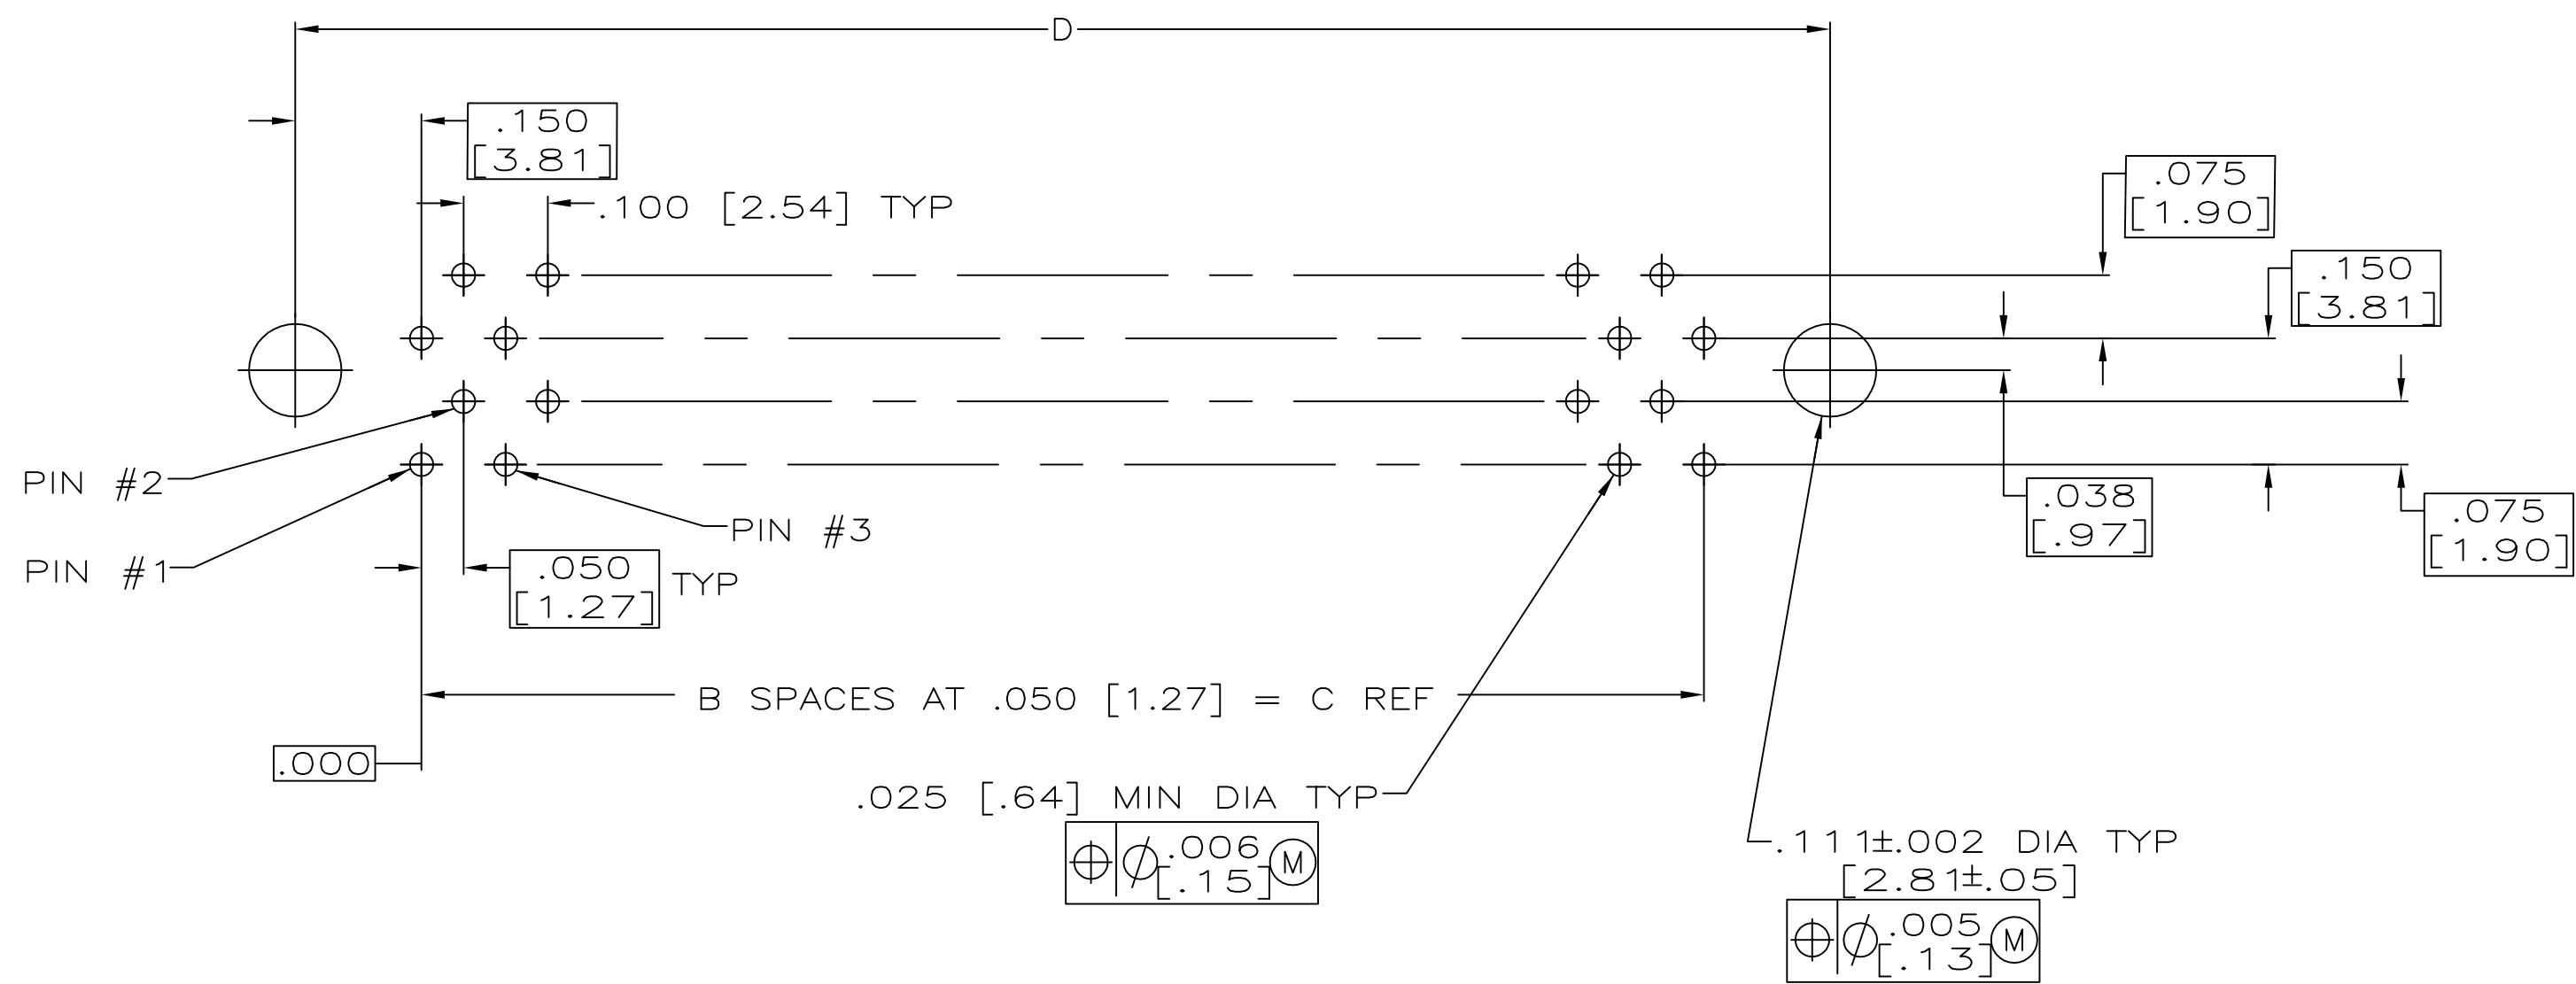


RECOMMENDED P.C. BOARD HOLE PATTERN
(CONNECTOR SIDE)

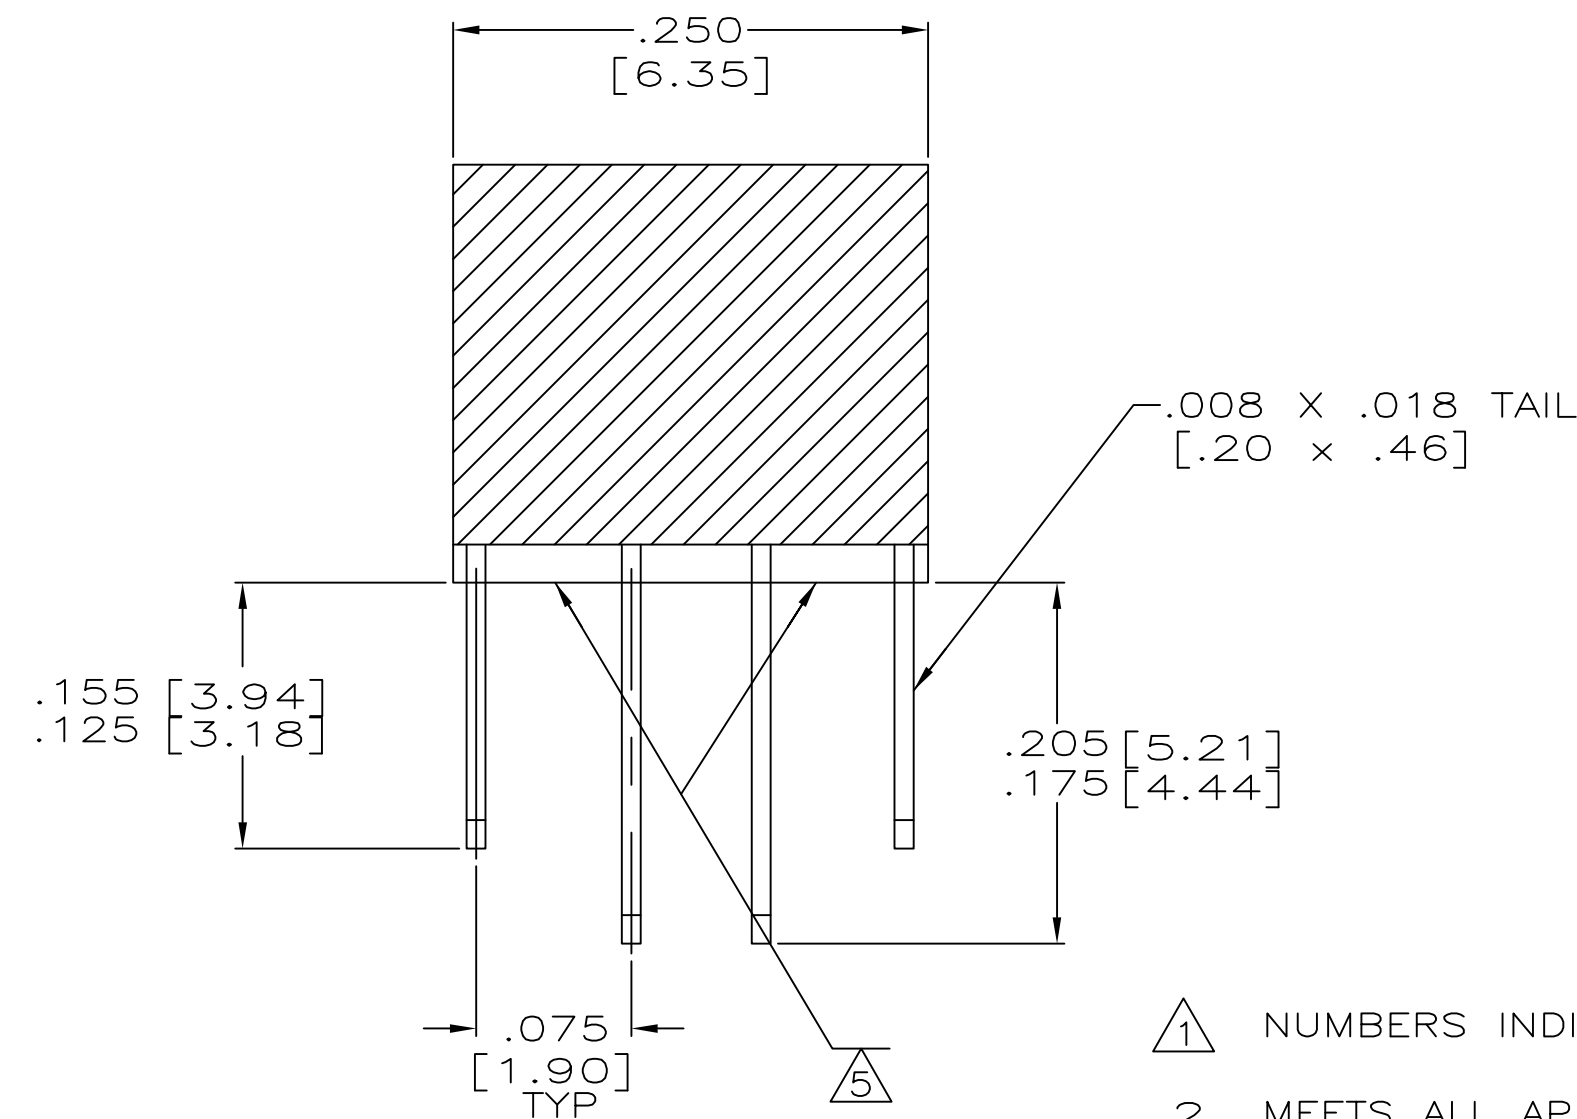

1	NUMBERS INDICATING END POSITIONS MARKED THIS SIDE ONLY.	
2	MEETS ALL APPLICABLE REQUIREMENTS OF MIL-C-55302.	
3	HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER MIL-M-24519, GLCP-30F; COLOR: GRAY.	
4	BRIDGE IN GROOVE N/A FOR 20 THRU 50 POSITIONS.	
5	EPOXY IS ADDED TO BOTTOM OF HOUSING FOR INCREASED CONTACT RETENTION.	
6	AMP, 00779, PART NO., MILITARY P/N AND DATE CODE MARKED IN THIS APPROXIMATE AREA.	
7	CONNECTOR HAS NO EPOXY ADDED FOR CONTACT RETENTION OR SEALING.	

5	3	M55302/119-11	1 - 64	3.000	[76.20]	3.450	[87.63]	3.150	[80.01]	63	3.740	[95.00]	128	2-530745-2
↑	↑	M55302/119-10	1 - 55	2.550	[64.77]	3.000	[76.20]	2.700	[68.58]	54	3.290	[83.57]	110	2-530745-1
		M55302/119-09	1 - 50	2.300	[58.42]	2.750	[69.85]	2.450	[62.23]	49	3.040	[77.22]	100	2-530745-0
		M55302/119-08	1 - 45	2.050	[52.07]	2.500	[63.50]	2.200	[55.88]	44	2.790	[70.87]	90	1-530745-9
		M55302/119-07	1 - 40	1.800	[45.72]	2.250	[57.15]	1.950	[49.53]	39	2.540	[64.52]	80	1-530745-8
		M55302/119-06	1 - 35	1.550	[39.37]	2.000	[50.80]	1.700	[43.18]	34	2.290	[58.17]	70	1-530745-7
		M55302/119-05	1 - 30	1.300	[33.02]	1.750	[44.45]	1.450	[36.83]	29	2.040	[51.82]	60	1-530745-6
		M55302/119-04	1 - 25	1.050	[26.67]	1.500	[38.10]	1.200	[30.48]	24	1.790	[45.47]	50	1-530745-5
↓		M55302/119-03	1 - 20	.800	[20.32]	1.250	[31.75]	.950	[24.13]	19	1.540	[39.12]	40	1-530745-4
		M55302/119-02	1 - 15	.550	[13.97]	1.000	[25.40]	.700	[17.78]	14	1.290	[32.77]	30	1-530745-3
5		M55302/119-01	1 - 10	.300	[7.62]	.750	[19.05]	.450	[11.43]	9	1.040	[26.42]	20	1-530745-2
7		M55302/119-11	1 - 64	3.000	[76.20]	3.450	[87.63]	3.150	[80.01]	63	3.740	[95.00]	128	1-530745-1
↑		M55302/119-10	1 - 55	2.550	[64.77]	3.000	[76.20]	2.700	[68.58]	54	3.290	[83.57]	110	1-530745-0
		M55302/119-09	1 - 50	2.300	[58.42]	2.750	[69.85]	2.450	[62.23]	49	3.040	[77.22]	100	530745-9
		M55302/119-08	1 - 45	2.050	[52.07]	2.500	[63.50]	2.200	[55.88]	44	2.790	[70.87]	90	530745-8
		M55302/119-07	1 - 40	1.800	[45.72]	2.250	[57.15]	1.950	[49.53]	39	2.540	[64.52]	80	530745-7
		M55302/119-06	1 - 35	1.550	[39.37]	2.000	[50.80]	1.700	[43.18]	34	2.290	[58.17]	70	530745-6
		M55302/119-05	1 - 30	1.300	[33.02]	1.750	[44.45]	1.450	[36.83]	29	2.040	[51.82]	60	530745-5
		M55302/119-04	1 - 25	1.050	[26.67]	1.500	[38.10]	1.200	[30.48]	24	1.790	[45.47]	50	530745-4
↓	↓	M55302/119-03	1 - 20	.800	[20.32]	1.250	[31.75]	.950	[24.13]	19	1.540	[39.12]	40	530745-3
		M55302/119-02	1 - 15	.550	[13.97]	1.000	[25.40]	.700	[17.78]	14	1.290	[32.77]	30	530745-2
7	3	M55302/119-01	1 - 10	.300	[7.62]	.750	[19.05]	.450	[11.43]	9	1.040	[26.42]	20	530745-1
REMARKS	HSG MAT'L	MILITARY P/N	CAVITY ID	E		D		C		B	A		POSN.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 06JUN2015 MANJUNATH C M CHK. 06JUN2015 CHARLES THOMAS APVD. 06JUN2015 CHARLES THOMAS		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1/2 PLC ± 2 PLC ± 4 PLC ± 6 PLC ± 8 PLC ± 10 PLC ± 12 PLC ± 14 PLC ± 16 PLC ± 18 PLC ± 20 PLC ± 22 PLC ± 24 PLC ± 26 PLC ± 28 PLC ± 30 PLC ± 32 PLC ± 34 PLC ± 36 PLC ± 38 PLC ± 40 PLC ± 42 PLC ± 44 PLC ± 46 PLC ± 48 PLC ± 50 PLC ± 52 PLC ± 54 PLC ± 56 PLC ± 58 PLC ± 60 PLC ± 62 PLC ± 64 PLC ± 66 PLC ± 68 PLC ± 70 PLC ± 72 PLC ± 74 PLC ± 76 PLC ± 78 PLC ± 80 PLC ± 82 PLC ± 84 PLC ± 86 PLC ± 88 PLC ± 90 PLC ± 92 PLC ± 94 PLC ± 96 PLC ± 98 PLC ± 100 PLC ±		NAME RECEPTACLE ASSY, MINI BOX MILITARY, WITH LOW FORCE CONTACTS —	
MATERIAL —		APPLICATION SPEC WEIGHT CUSTOMER DRAWING		SIZE A1 CAGE CODE 00779 DRAWING NO C=530745 RESTRICTED TO —	
FINISH —		SCALE 5:1		SHEET 1 OF 1 REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-530745-5](#)