SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA 22.2, # 0,0.4,8

VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 3 AMP/40°C, 120/250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

0.16 mA@ 120V 60Hz EACH LINE TO GROUND:

0.28 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_0 - \sqrt{100 - T_0}$ 100 - T_a $I_0 = I_r -$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDZ

CATALOG # 3ERK1 EC # APPRVD. DATE 08-028933 PJ 19N0V08

CUSTOMER DRAWING

TEST SPECIFICATIONS:

INDUCTANCE: 7.0 mH NDMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

0.0044 μF ±20% 0.741 μF±20% LINE TO GROUND: LINE TO LINE: DISCHARGE RESISTOR: 470K △

L/G AND L/L I.R.

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

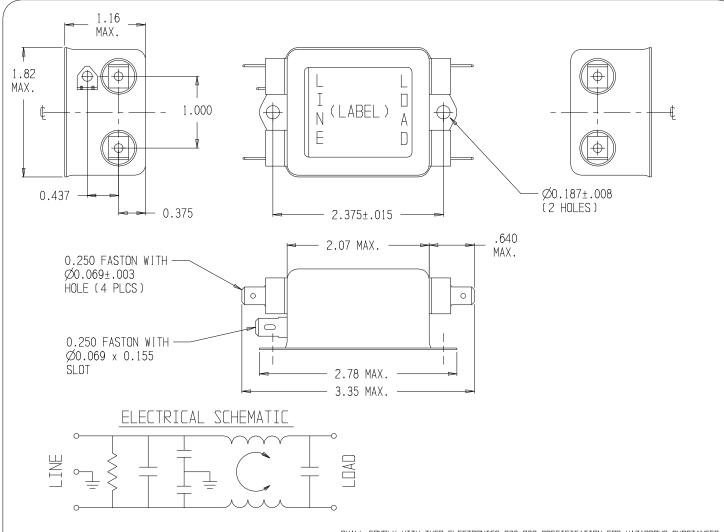

SHALL COMPLY WITH TYCO ELECTRONICS 230-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES

50A- 50A(MINIMUM) INSERTION LOSS											THIRD ANGLE		
FREQUENCY MHz	. 05	. 10	. 15	. 50	1.0	2.0	5.0	10	20	30	PROJECTION TYCO Electronics UNLESS OTHERWISE SPECIFIED, CURCOM PRODUCTS, 620 S. BUTTERFIELD RD. MANDELEIN IL 60060		
COMMON dB	21	27	30	43	49	50	50	48	50	49	TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED THIS INFORMATION IS CONFIDENTIAL AND PROPRETARY TO TYPE ELECTRONICS PART NO. 1-1609036-7 TYPE DETRONICS OPERATION AND TS WORK DUBYES SUBSIDIARIES TO THE PROPRETATION AND THE PROPERTY TO THE PROPRETATION AND THE PROPERTY TO THE PRO		
DIFF.	9	20	35	67	78	78	72	66	61	60	NOT ELECTRONICS CURRICALIDA AND ITS WINCHWILD ANY STADILIDARIES SCALE: AND AFFILIATES. IT MAY NOT BE DISCUSSED TO ANYTHIS OTHER THAN TYCE ELECTRONICS PERSONEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCE ELECTRONICS CURRORATION. FROM TYCE ELECTRONICS CURRORATION. DRW. BY: DRW. BY: DRIFT		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: