


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/20/98	XXXXXX	INITIAL RELEASE
A	10/03/98	XXXXXX	ADD GROOVES TO BARREL
B	03/30/10	XXXXXX	THE PACKAGED WAS CHAGNED AND THE NOTE WAS CHANGED

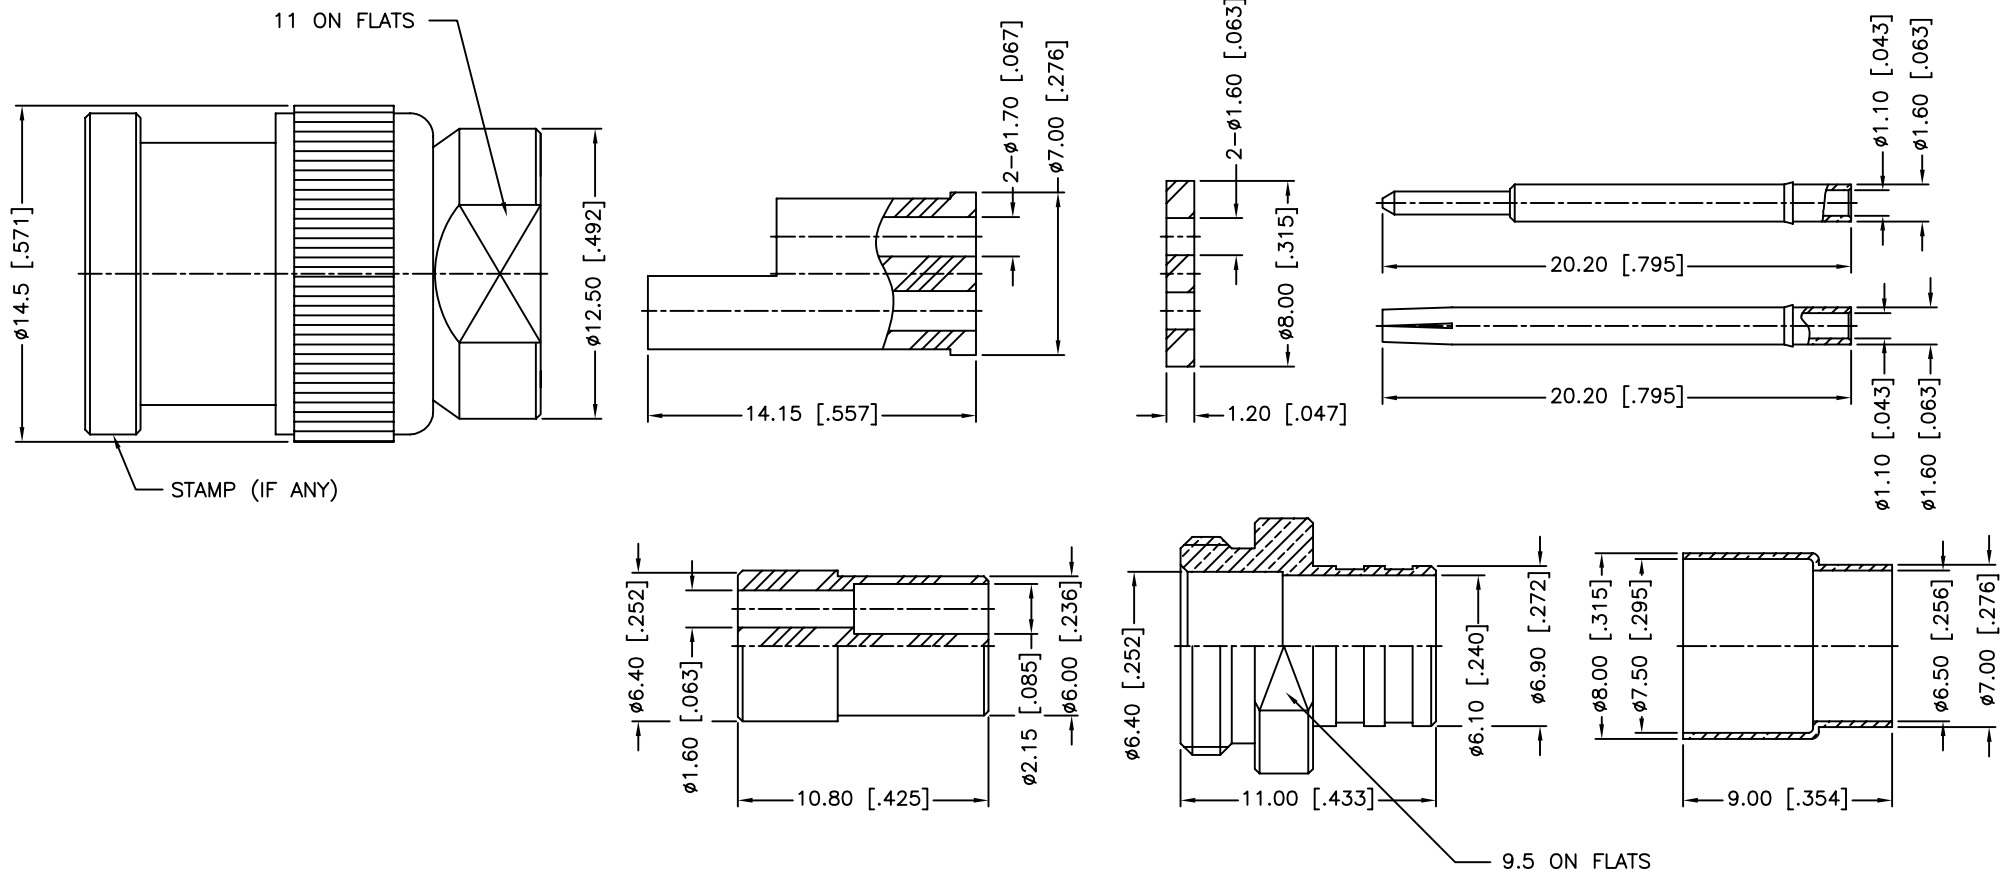

13	FERRULE	BRASS	NICKEL	1
12	BARREL	BRASS	NICKEL	1
11	INSULATOR	PBT	WHITE	1
10	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
9	CONTACT PIN	BRASS	GOLD	1
8	GASKET	SILICONE	RED	1
7	INSULATOR	PBT	WHITE	1
6	WASHER	BRASS	NICKEL	1
5	SPRING	BER. COPPER	NICKEL	1
4	RETAINER RING	BRASS	NICKEL	1
3	GASKET	RUBBER	RED	1
2	BODY	BRASS	NICKEL	1
1	SHELL	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	03/30/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/162108.DWG

Amphenol Connex			
BNC TWIN PLUG (FOR RG-108A/U CABLE)			
162108			
DWG. NO.	162108.DWG	REV.	B
SIZE	A	SCALE	NA

1. CRIMPED FERRULE
HEX. CRIMP SIZE .278"
2. SOLDER CENTER CONTACTS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[162108](#)