



**SPECIFICATIONS**

**MECHANICAL:**  
 SHOCK: MIL-STD 202 METHOD 213B, COND. K.  
 VIBRATION: MIL-STD 202 METHOD 201  
 LIFE: 300 INSERTION/WITHDRAWAL CYCLES (MINIMUM)

**ELECTRICAL**  
 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC  
 INSULATION RESISTANCE: 100 MEGOHMS (MIN) AT 77°F  
 CONTACT RESISTANCE: 5.0 MILLOHMS MAX.  
 CURRENT RATING: 7.5 AMPS (#20 CONTACT)  
 6.5 AMPS (7 & 8 PIN #20 CONTACT)  
 13.0 AMPS (#16 CONTACT)

**ENVIRONMENTAL**  
 TEMPERATURE LIMITS: -40°C TO +65°C (NON-OPERATING)  
 MOISTURE RESISTANCE: MIL-STD 202 METHOD 106F  
 INSULATION RESISTANCE: MIL-STD 202 METHOD 302, COND. B  
 THERMAL SHOCK: MIL-STD 202 METHOD 107G  
 SALT SPRAY: MIL-STD 202 METHOD 101D, COND. B  
 WATER TIGHTNESS TEST: U.S. COAST GUARD CFR 46 PART 110.20

- NOTES:**
- HEX NUT TORQUE: 8 TO 10 INCH-LBS. OF TORQUE (MUST NOT EXCEED 10 INCH-LBS.)
  - HEX NUT SHIPPED UNASSEMBLED.




**CONTACT ARRANGEMENT**

SHOWN ARE REAR VIEWS OF MALE PANEL CONNECTORS



**MATERIALS:**  
 PANEL CONNECTOR SHELL, CONTACT LOCKING DISC: THERMOPLASTIC POLYMER GLASS FIBER, FLAME RETARDANT  
 CONNECTOR SHELL INTERIOR: THERMOPLASTIC RUBBER  
 CONTACTS: COPPER BASE ALLOY GOLD-PLATED OVER NICKEL UNDERPLATE  
 HEX NUT: THERMOPLASTIC

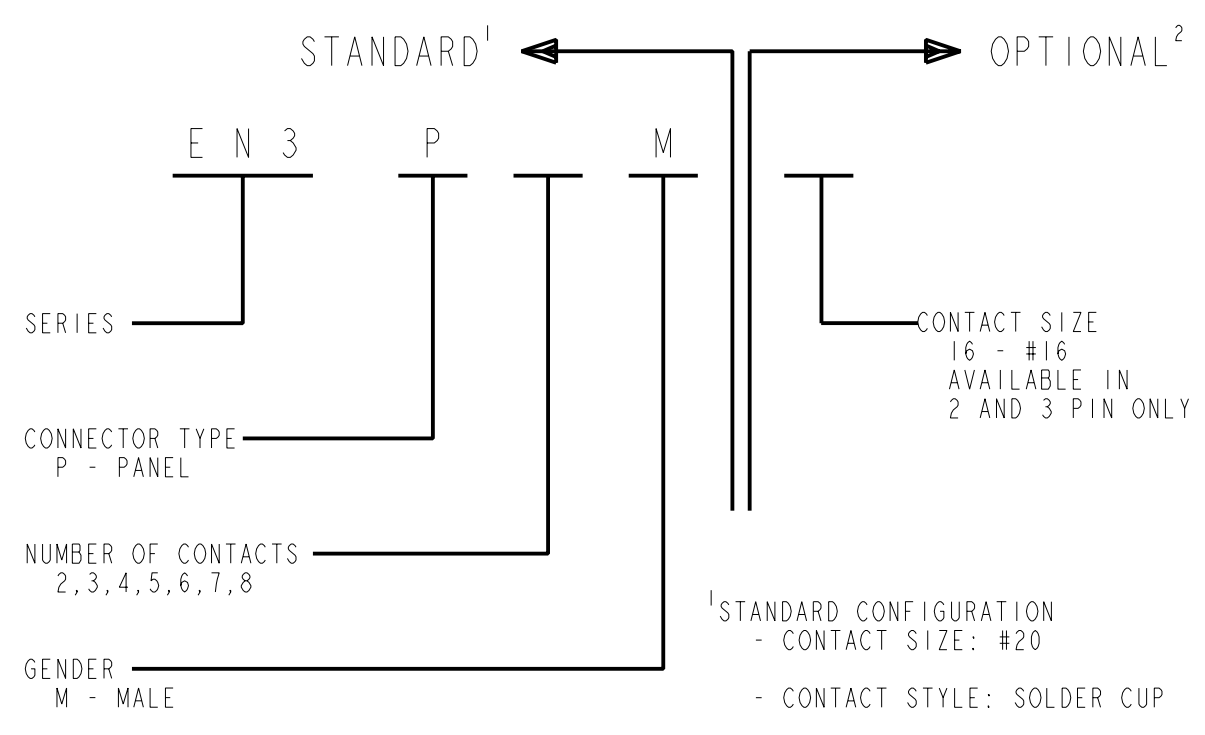

- <sup>1</sup>STANDARD CONFIGURATION  
 - CONTACT SIZE: #20  
 - CONTACT STYLE: SOLDER CUP  
 - CONTACT PLATING: GOLD  
 - CONTACTS FACTORY INSTALLED  
 - PACKAGED IN BULK
- <sup>2</sup>OPTIONAL CONFIGURATION  
 - LEAVE BLANK FOR STANDARD CONFIGURATION

REV	ECO NUMBER	DATE	BY	APVD
G	24661	3-4-04	JL	EB
F	23595	2-6-01	JL	DK
E	22232	4-30--98	SG	RB
D	ECO #21461	12-2-96	MM	FL
C	ECO #19815	10-9-95	RC	KS
B	FIRST DRAWN	1-28-95	SG	FL
REVISIONS				

★ STAR SYMBOL DENOTES CRITICAL DIMENSION

UNLESS OTHERWISE SPECIFIED

- ALL DIMENSIONS IN INCHES  
 - TWO PLACE DECIMALS ±0.01  
 - THREE PLACE DECIMALS ±0.005  
 - ANGLES ±1°  
 - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.
- FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002
- REMOVE ALL BURRS

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
SIZE	WIDTH	MULT	LBS/M	TEMPER
FINISH SPEC No.		MATERIAL SPEC No.		
FIRST USED ON		SCALE 3:1		
DATE DRAWN	BY	CHKD	APVD	
1-28-95	SG	2-27-95	FL	
NAME MALE PANEL CONNECTORS EN3P_M SERIES			PART No.	REV
			EN3P_M	G

CUSTOMER DRAWING

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Switchcraft:

[EN3P4MPX](#) [EN3P4MX](#) [EN3P3FX](#) [EN3P5FX](#) [EN3P5MX](#) [EN3P6FX](#) [EN3P6MX](#) [EN3P8MX](#) [EN3P10F26SX](#)  
[EN3P10F26X](#) [EN3P10M26SX](#) [EN3P10M26X](#) [EN3P11F26SX](#) [EN3P11F26X](#) [EN3P11M26SX](#) [EN3P11M26X](#)  
[EN3P12F26X](#) [EN3P12M26SX](#) [EN3P12M26X](#) [EN3P13F26SX](#) [EN3P13F26X](#) [EN3P13M26SX](#) [EN3P13M26X](#)  
[EN3P14F26SX](#) [EN3P14F26X](#) [EN3P14M26SX](#) [EN3P14M26X](#) [EN3P15F26SX](#) [EN3P15F26X](#) [EN3P15M26SX](#)  
[EN3P15M26X](#) [EN3P16F26SX](#) [EN3P16F26X](#) [EN3P16M26SX](#) [EN3P16M26X](#) [EN3P17F26SX](#) [EN3P17F26X](#)  
[EN3P17M26SX](#) [EN3P17M26X](#) [EN3P18F26SX](#) [EN3P18F26X](#) [EN3P18M26SX](#) [EN3P18M26X](#) [EN3P2F16CKX](#)  
[EN3P2F16CX](#) [EN3P2F16KX](#) [EN3P2F16PX](#) [EN3P2F16X](#) [EN3P2FCKX](#) [EN3P2FCX](#) [EN3P2FKX](#) [EN3P2FPX](#)  
[EN3P2FRAPCX](#) [EN3P2FX](#) [EN3P2M16CKX](#) [EN3P2M16CX](#) [EN3P2M16KX](#) [EN3P2M16PX](#) [EN3P2M16X](#)  
[EN3P2MCKX](#) [EN3P2MCX](#) [EN3P2MKX](#) [EN3P2MPX](#) [EN3P2MX](#) [EN3P3F16CX](#) [EN3P3F16KX](#) [EN3P3F16PX](#)  
[EN3P3F16X](#) [EN3P3FCKX](#) [EN3P3FCX](#) [EN3P3FKX](#) [EN3P3FPX](#) [EN3P3FRAPCX](#) [EN3P3M16CKX](#) [EN3P3M16CX](#)  
[EN3P3M16KX](#) [EN3P3M16PX](#) [EN3P3M16X](#) [EN3P3MCKX](#) [EN3P3MCX](#) [EN3P3MKX](#) [EN3P3MPX](#) [EN3P4FCKX](#)  
[EN3P4FCX](#) [EN3P4FKX](#) [EN3P4FPX](#) [EN3P4MCKX](#) [EN3P4MCX](#) [EN3P4MKX](#) [EN3P5FCKX](#) [EN3P5FCX](#) [EN3P5FKX](#)  
[EN3P5FPX](#) [EN3P5FRAPCX](#) [EN3P5MCKX](#) [EN3P5MCX](#) [EN3P5MKX](#) [EN3P6FCKX](#) [EN3P6FCX](#) [EN3P6FPX](#)