


# ALUMINUM ELECTROLYTIC CAPACITORS

# UZG

3.95mmL MAX. Chip Type,  
Wide Temperature Range




- Chip type with 3.95mmLMAX height. Operating over wide temperature range of -40 to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).
- AEC-Q200 compliant. Please contact us for details.




## Specifications

Item	Performance Characteristics								
Category Temperature Range	-40 to +105°C								
Rated Voltage Range	6.3 to 50V								
Rated Capacitance Range	1 to 100μF								
Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.								
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25	35	50	120Hz 20°C	
	tan δ (MAX.)	0.38	0.32	0.20	0.16	0.14	0.14		
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	50	120Hz	
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	6	5	3	3	3		3
		Z-40°C / Z+20°C	10	10	6	6	4		4
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.						Capacitance change	tan δ	Leakage current
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.								
							Capacitance change	tan δ	Leakage current
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.						Capacitance change	tan δ	Leakage current
Marking	Black print on the case top.								

## Chip Type

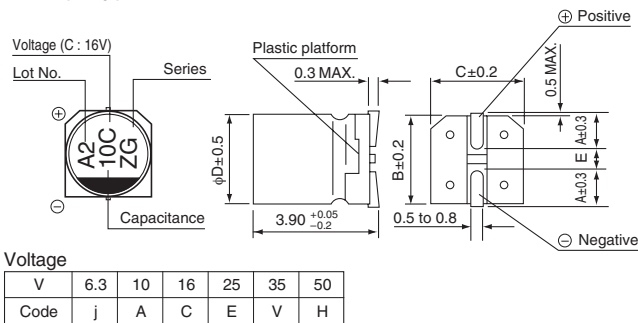

## Type numbering system (Example : 16V 10μF)

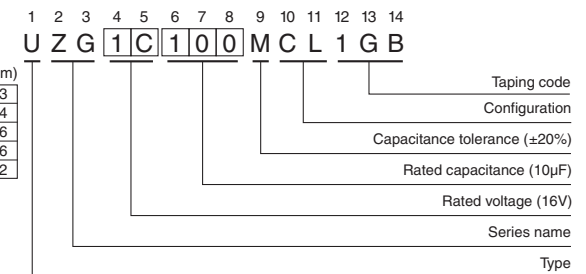

## Dimensions

Cap. (μF)	Code	6.3		10		16		25		35		50	
		4	19	5	24	5	26	6.3	33	6.3	36	4	5.4
1	010												
2.2	2R2												9.6
3.3	3R3												12
4.7	4R7												16
10	100					4	16	4	11	4	13	5	16
22	220	4	19	5	24	5	26	6.3	33	6.3	36	6.3	26
33	330	5	26	5	30	6.3	35	6.3	42				
47	470	5	32	6.3	40	6.3	44						
100	101	6.3	52										

Rated ripple current (mA Arms) at 105°C 120Hz

## Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size soldering by reflow are given in page 18,19.
- Please refer to page 3 for the minimum order quantity.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nichicon:

[UZE1V4R7MCL1GB](#) [UZG0J101MCL1GB](#) [UZG0J220MCL1GB](#) [UZG0J330MCL1GB](#) [UZG0J470MCL1GB](#)  
[UZG1A220MCL1GB](#) [UZG1A330MCL1GB](#) [UZG1A470MCL1GB](#) [UZG1C100MCL1GB](#) [UZG1C220MCL1GB](#)  
[UZG1C330MCL1GB](#) [UZG1C470MCL1GB](#) [UZG1E100MCL1GB](#) [UZG1E220MCL1GB](#) [UZG1E330MCL1GB](#)  
[UZG1E4R7MCL1GB](#) [UZG1H010MCL1GB](#) [UZG1H0R1MCL1GB](#) [UZG1H100MCL1GB](#) [UZG1H2R2MCL1GB](#)  
[UZG1H3R3MCL1GB](#) [UZG1H4R7MCL1GB](#) [UZG1HR22MCL1GB](#) [UZG1HR33MCL1GB](#) [UZG1HR47MCL1GB](#)  
[UZG1V100MCL1GB](#) [UZG1V220MCL1GB](#)