

# Features

# Unregulated Converters

- Qualified with 65kV/ $\mu$ s @ common mode = 1KV
- Isolation 6.4kVDC
- Optional continuous short circuit protection
- Unique transformer system
- Compact SIP7 package
- /X2 version with >9mm input/output clearance
- very low isolation capacitance



## RxxP2xx

**2 Watt  
SIP7  
Single and Dual  
Output**



EN/IEC62368-1 certified  
UL/CSA60950-1 certified  
UL/CSA62368-1 certified  
EN61010-1 certified  
EN55032 compliant

## Description

The RxxP2xxS\_D series of DC/DC converters are certified to UL/CSA60950-1 and UL/CSA62368-1 as well as IEC/EN62368-1 and EN61010-1. This makes them ideal for medical and safety applications where approved isolation is required. The /X2 version has an input/output clearance of more than 9mm.


## Selection Guide

Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. (1) [%]	max. Capacitive Load (2) [ $\mu$ F]
RxxP23.3S (3,4)	5, 12, 15, 24	3.3	600	70	3300
RxxP205S (3,4)	5, 12, 15, 24	5	400	70 - 75	1200
RxxP209S (3,4)	5, 12, 15, 24	9	222	70 - 75	1200
RxxP212S (3,4)	5, 12, 15, 24	12	167	70 - 75	680
RxxP215S (3,4)	5, 12, 15, 24	15	133	75 - 80	680
RxxP23.3D (3,4)	5, 12, 15, 24	$\pm$ 3.3	$\pm$ 300	70	$\pm$ 1500
RxxP205D (3,4)	5, 12, 15, 24	$\pm$ 5	$\pm$ 200	70 - 75	$\pm$ 470
RxxP209D (3,4)	5, 12, 15, 24	$\pm$ 9	$\pm$ 111	70 - 75	$\pm$ 470
RxxP212D (3,4)	5, 12, 15, 24	$\pm$ 12	$\pm$ 83	70 - 75	$\pm$ 330
RxxP215D (3,4)	5, 12, 15, 24	$\pm$ 15	$\pm$ 66	75 - 80	$\pm$ 330

### Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient  
 Note2: Max. Capacitive Load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter

## Model Numbering

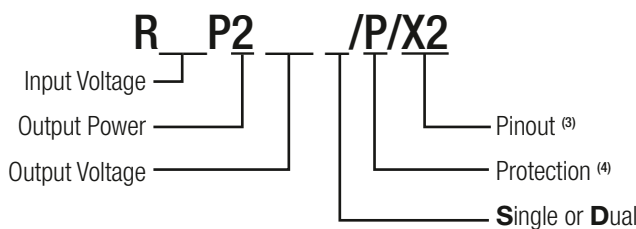

### Notes:

- Note3: add suffix „/X2“ for single output with alternative pinout  
 Note4: add suffix „/P“ for continuous short circuit protection

### Ordering Examples:

- R05P205S/P = 5V Input, 5V Output, Single Output, Continuous Short Circuit Protection  
 R05P23.3D/P = 5V Input, 3.3V Output, Dual Output, Continuous Short Circuit Protection  
 R05P205S/P/X2 = 5V Input, 5V Output, Single Output, Continuous Short Circuit Protection, Alternative Pinout



[www.recom-power.com/eval-ref-boards](http://www.recom-power.com/eval-ref-boards)

[www.recom-power.com/bier](http://www.recom-power.com/bier)

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**BASIC CHARACTERISTICS**

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range			±10%	
Minimum Load <sup>(5)</sup>			0%	
Internal Operating Frequency		20kHz	50kHz	85kHz
Output Ripple and Noise <sup>(6)</sup>	20MHz BW			200mVp-p


**Notes:**

Note5: Operation below 10% load will not harm the converter, but specifications may not be met


Note6: Measurements are made with a 0.1µF MLCC across output (low ESR)

**Efficiency vs. Load**


**PxxP205S and PxxP209S**

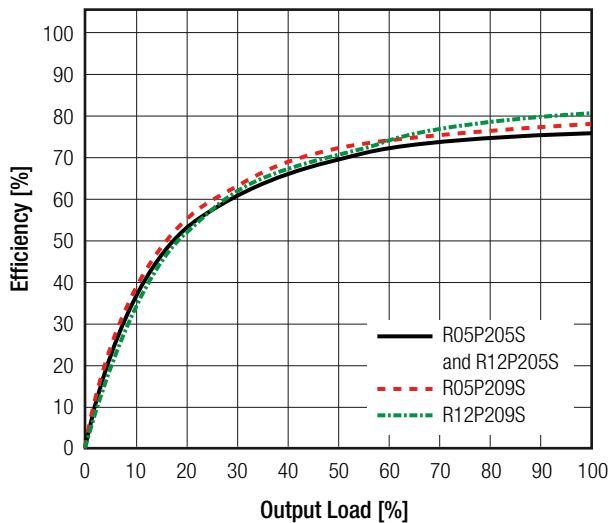


**PxxP205D and PxxP209D**

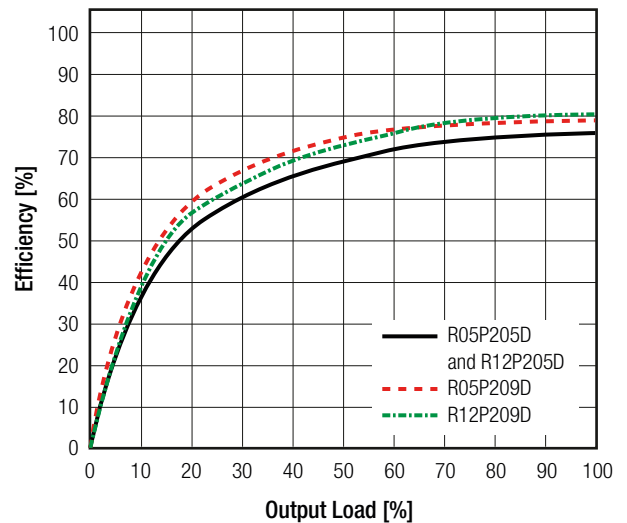

**PxxP212S and PxxP215S**

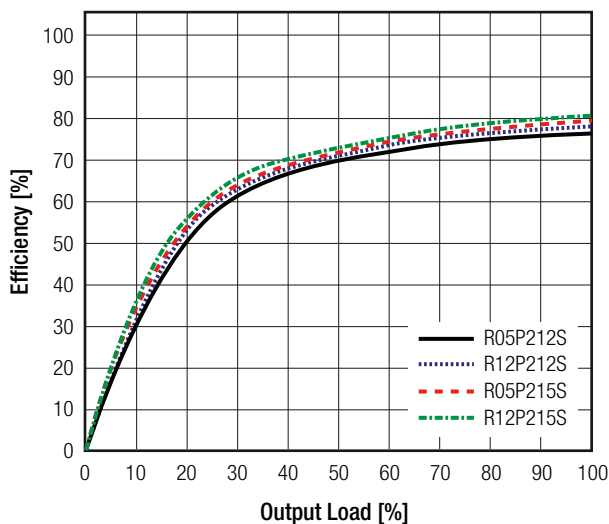

**PxxP212D and PxxP215D**

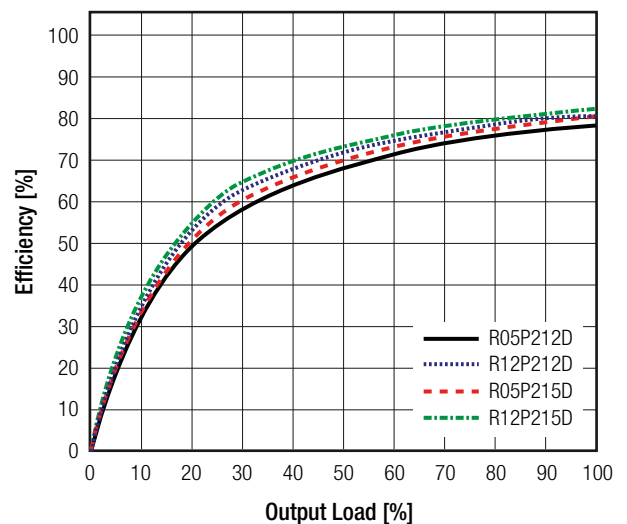


**REGULATIONS**

Parameter	Condition		Value
Output Accuracy			±5.0% max.
Line Regulation	low line to high line, full load		1.2%/1% of Vin typ.
Load Regulation	10% to 100% load	3.3, 5VDC 9, 12, 15VDC	15% typ. 10% typ.

continued on next page


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Tolerance Envelope

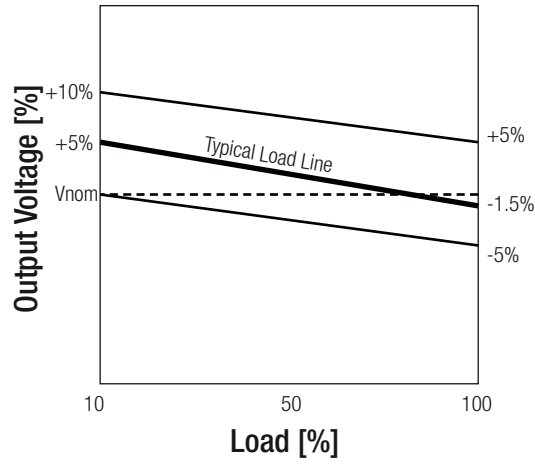


Deviation vs. Load


PxxP205S and PxxP209S

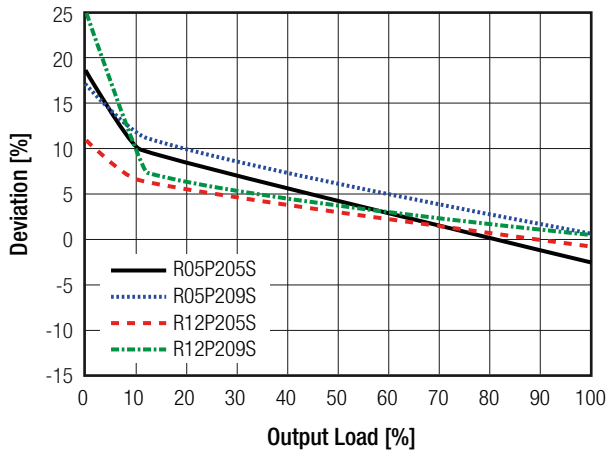


PxxP205D and PxxP209D

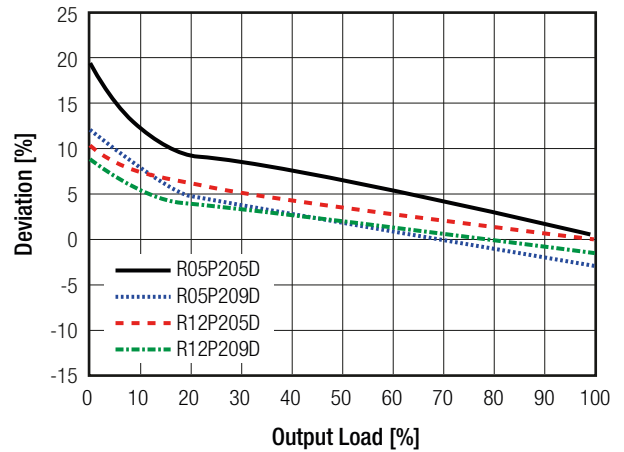

PxxP212S and PxxP215S

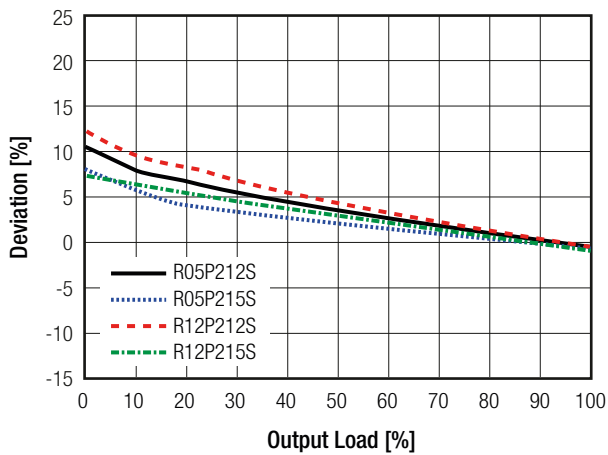

PxxP212D and PxxP215D

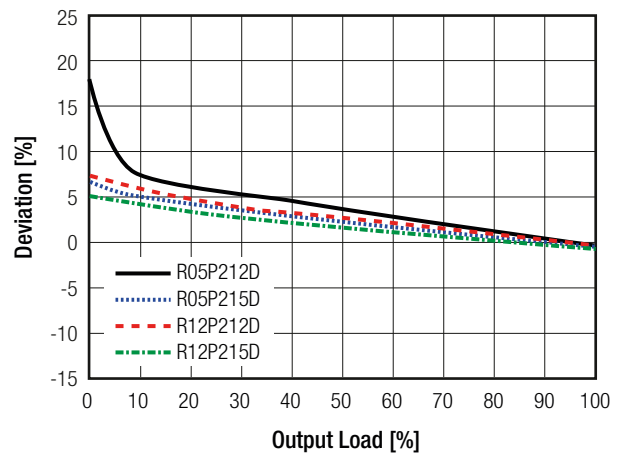


**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

PROTECTIONS			
Parameter	Type		Value
Short Circuit Protection (SCP)	without Suffix "/P" with Suffix "/P"		1 second continuous
Isolation Voltage <sup>(7)</sup>	I/P to O/P	tested for 1 second	6.4kVDC
		rated for 1 minute	3.2VAC/60Hz
Isolation Resistance			15GΩ min.
Isolation Capacitance			1.5pF min. / 10pF max.
Insulation Grade			basic
<b>Notes:</b>			
Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage			
Note8: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: T1A slow blow type			

ENVIRONMENTAL				
Parameter	Condition		Value	
Operating Temperature Range	without derating @ free air convection (see graph)		-40°C to +90°C	
Operating Altitude			2000m	
Operating Humidity	non-condensing		95% RH max.	
Pollution Degree			PD2	
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	Single Dual	2113 x 10 <sup>3</sup> hours 2434 x 10 <sup>3</sup> hours
		+85°C	Single Dual	299 x 10 <sup>3</sup> hours 334 x 10 <sup>3</sup> hours

**Derating Graph**

(@ Chamber and free air convection)

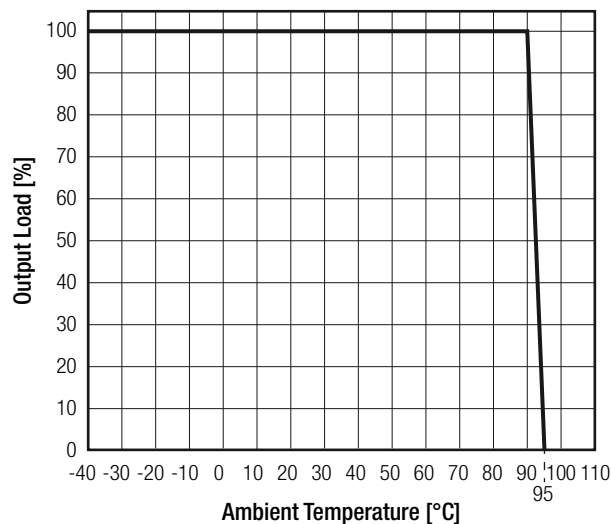


**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E224736-A56-UL	UL60950-1, 2nd Edition, 2014 CAN/CSA C22.2 No. 60950-1, 2nd Edition, 2014
Audio/video, information and communication technology equipment. Safety requirements	E224736-A56-UL	UL62368-1, 2nd Edition, 2014 CAN/CSA C22.2 No. 62368-1, 2nd Edition, 2014
Audio/video, information and communication technology equipment. Safety requirements	ATTCB106076	IEC62368-1:2014, 2nd Edition EN62368-1:2014 +A11:2017
Safety Requirements for Electrical Equipment for Measurement, Control and Laboratory Use - Part 1: General Requirements	PS080601010	EN61010-1:2010
EAC	RU-AT.49.09571	TP TC 004/2011
RoHs 2+		RoHS-2011/65/EU + AM2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter	EN55032, Class A/B

**EMC Filtering Suggestions according to EN55032 Class A and Class B**

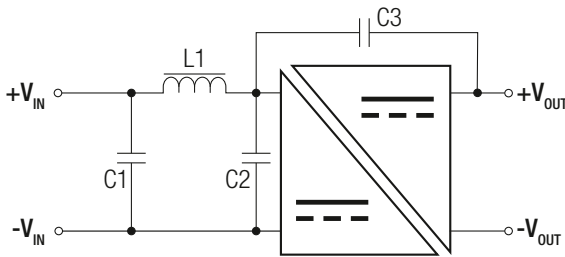

**Component List Class A**

C1	L1	C3
10µF 100V MLCC	-	-


**Component List Class B**

C1	C1	L1	C3
10µF 100V MLCC	10µF 100V MLCC	470µH choke WE 744 045 120	2n2F 8kV Vishay HGZ222MBP

DIMENSION AND PHYSICAL CHARACTERISTICS		
Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic, (UL94 V-0) silicon rubber compound, (UL94 V-0) FR4, (UL94 V-0)
Package Dimension (LxWxH)		19.5 x 9.8 x 12.5mm
Package Weight		4.3g typ.

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

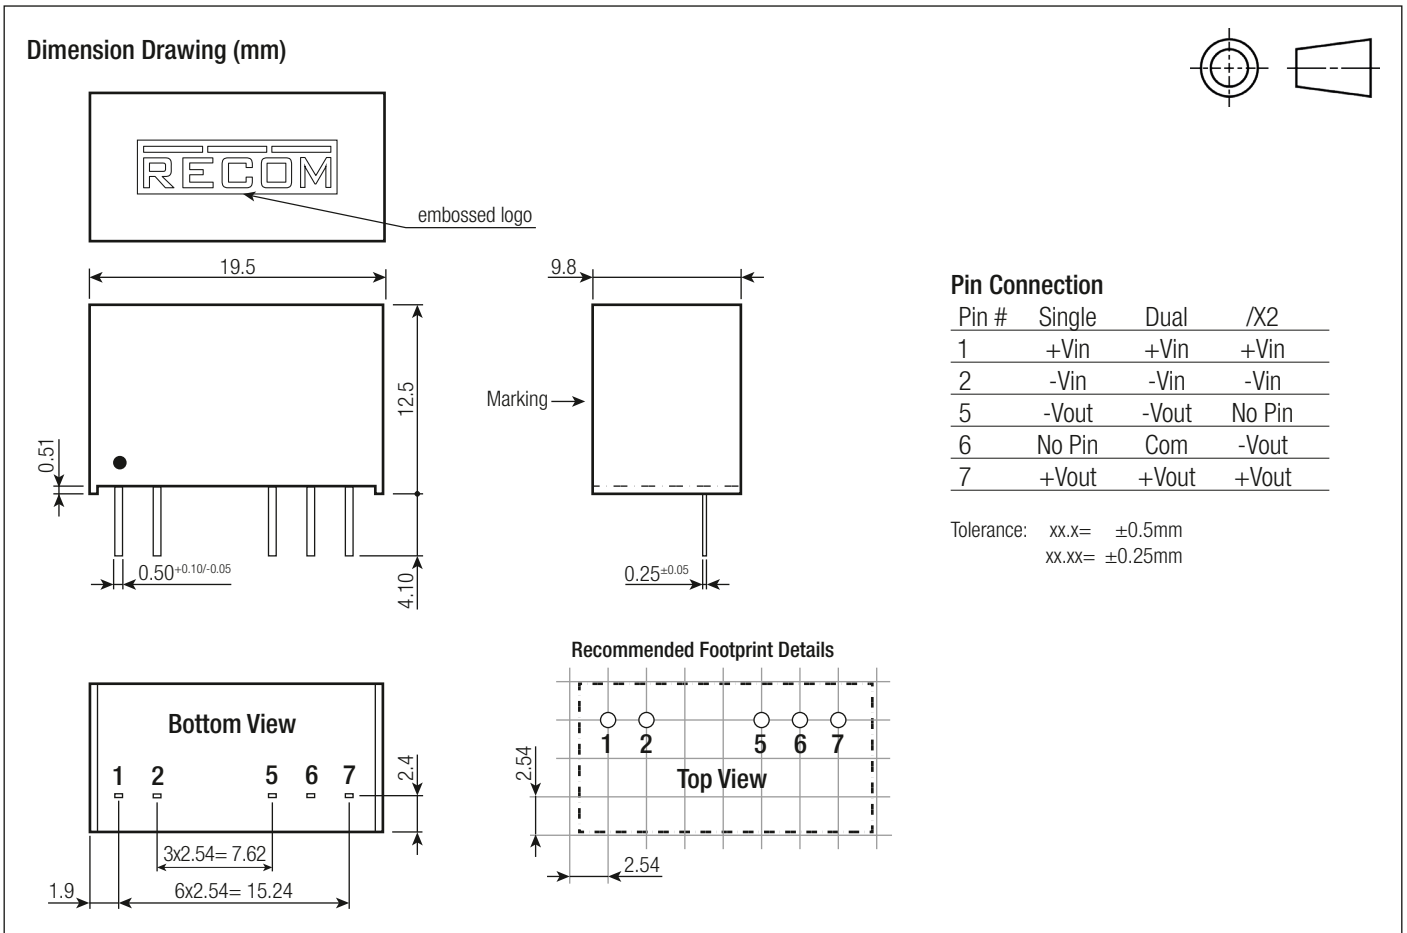

<b>PACKAGING INFORMATION</b>		
Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 22.3 x 12.0mm
Packaging Quantity	tube	25pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[R05P205S](#) [R05P209S](#) [R12P212S](#) [R05P205D](#) [R05P205D/P](#) [R05P205S/P](#) [R05P209D](#) [R05P209D/P](#) [R05P209S/P](#)  
[R05P212D](#) [R05P212D/P](#) [R05P212S](#) [R05P212S/P](#) [R05P215D](#) [R05P215D/P](#) [R05P215S](#) [R05P215S/P](#) [R05P23.3D](#)  
[R05P23.3D/P](#) [R05P23.3S](#) [R05P23.3S/P](#) [R12P205D](#) [R12P205D/P](#) [R12P205S](#) [R12P205S/P](#) [R12P209D](#)  
[R12P209D/P](#) [R12P209S](#) [R12P209S/P](#) [R12P212D](#) [R12P212D/P](#) [R12P212S/P](#) [R12P215D](#) [R12P215D/P](#) [R12P215S](#)  
[R12P215S/P](#) [R12P23.3D](#) [R12P23.3D/P](#) [R12P23.3S](#) [R12P23.3S/P](#) [R15P205D](#) [R15P205D/P](#) [R15P205S](#)  
[R15P205S/P](#) [R15P209D](#) [R15P209D/P](#) [R15P209S](#) [R15P209S/P](#) [R15P212D](#) [R15P212D/P](#) [R15P212S](#) [R15P212S/P](#)  
[R15P215D](#) [R15P215D/P](#) [R15P215S](#) [R15P215S/P](#) [R15P23.3D](#) [R15P23.3D/P](#) [R15P23.3S](#) [R15P23.3S/P](#)  
[R24P205D](#) [R24P205D/P](#) [R24P205S](#) [R24P205S/P](#) [R24P209D](#) [R24P209D/P](#) [R24P209S](#) [R24P209S/P](#) [R24P212D](#)  
[R24P212D/P](#) [R24P212S](#) [R24P212S/P](#) [R24P215D](#) [R24P215D/P](#) [R24P215S](#) [R24P215S/P](#) [R24P23.3D](#)  
[R24P23.3D/P](#) [R24P23.3S](#) [R24P23.3S/P](#) [R05P205S/P/X2](#) [R05P205S/X2](#) [R05P209S/P/X2](#) [R05P209S/X2](#)  
[R05P212S/P/X2](#) [R05P212S/X2](#) [R05P215S/P/X2](#) [R05P215S/X2](#) [R05P23.3S/P/X2](#) [R05P23.3S/X2](#) [R12P205S/P/X2](#)  
[R12P205S/X2](#) [R12P209S/P/X2](#) [R12P209S/X2](#) [R12P212S/P/X2](#) [R12P212S/X2](#) [R12P215S/P/X2](#) [R12P215S/X2](#)  
[R12P23.3S/P/X2](#) [R12P23.3S/X2](#)