

- **Ideal Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**




The RF1407D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 868.60 MHz receivers. Receiver designs using this filter include superhet IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220, in Germany under FTZ 17 TR 2100, in the United Kingdom under DTI MPT 1340 (for automotive only), in France under PTT Specifications ST/PAA/TPA/AGH/1542, and in Scandinavia.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included).

## RF1407D

## 868.60 MHz SAW Filter



**SM3838-8 Case**  
**3.8 x 3.8**

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency @ 25°C	$f_c$	1, 2, 3		868.60		MHz
Minimum I.L. (868.210-868.990 MHz)		1, 3		3.0	4.2	dB
1dB Bandwidth 868.05-869.15		-45°C to +90°C -25°C to +60°C	960 1000			kHz
Pass Bandwidth (relative to $IL_{min}$ )	$BW_3$	1, 3	1200	1800		kHz
Rejection (relative to $IL_{min}$ )		10-700 MHz 700-830 MHz 830-850 MHz 850-865.02 MHz 871-874.5 MHz 874.5-883 MHz 883-900 MHz 900-1000 MHz	50 40 32 25 11 16 30 40	55 45 37 28 14 21 33 45		dB
Temperature Coeff				0.032		ppm/°C <sup>2</sup>
Operating Temperature Range			-45		+90	°C
Impedance @ $f_c$		Input $Z_{IN} = R_{IN} \parallel C_{IN}$ Output $Z_{OUT} = R_{OUT} \parallel C_{OUT}$	$Z_{IN}$ $Z_{OUT}$	1 1	117Ω    3.7pf 117Ω    3.7pf	
Lid Symbolization (in addition to Lot and/or Date Codes)				505 // YWWS		
Standard Reel Quantity		7 Inch Reel 13 Inch Reel		8	500 Pieces/Reel 3000 Pieces/Reel	



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


### NOTES:

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss and bandwidth are dependent on the impedance matching component values and quality.
2. The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
3. Where noted, specifications apply over the entire specified operating temperature range of -45°C to +90°C.
4. Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
5. The design, manufacturing process, and specifications of this device are subject to change.
6. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
7. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
8. Tape and Reel Standard Per ANSI / EIA 481.
9. This product complies with directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.


Rating	Value	Units
Input Power Level	+10	dBm
DC Voltage	12	VDC
Storage Temperature	-45 to +90	°C
Soldering Temperature	(10 seconds / 5 cycles max.)	260 °C

### Electrical Connections

Pin	Connection
1	Input
2	Ground
3	Ground
4	Case Ground
5	Output
6	Ground
7	Ground
8	Case Ground

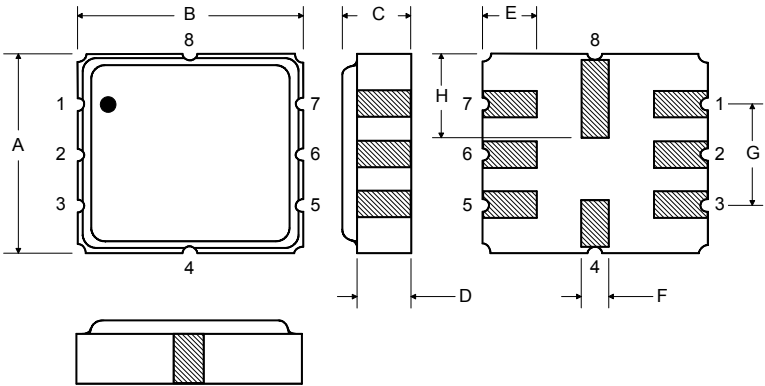

### Matching Circuit to 50Ω

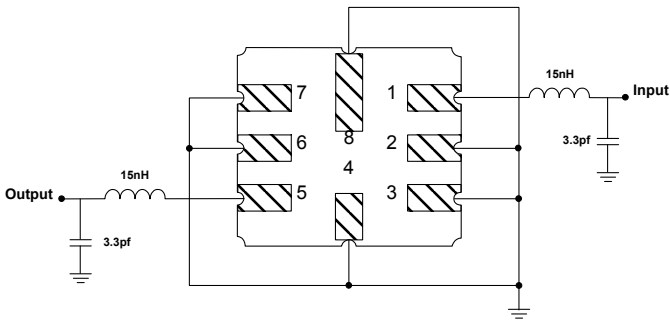

### Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.6	3.8	4.0	0.14	0.15	0.16
B	3.6	3.8	4.0	0.14	0.15	0.16
C	1.00	1.20	1.40	0.04	0.05	0.055
D	0.95	1.10	1.25	0.033	0.043	0.05
E	0.90	1.0	1.10	0.035	0.04	0.043
F	0.50	0.6	0.70	0.020	0.024	0.028
G	2.39	2.54	2.69	0.090	0.100	0.110
H	1.40	1.75	2.05	0.055	0.069	0.080

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murata:](#)

[RF1407D](#)