


REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
	C3	REVISED PER ECR-16-011494	20JUN2017	NK	CX


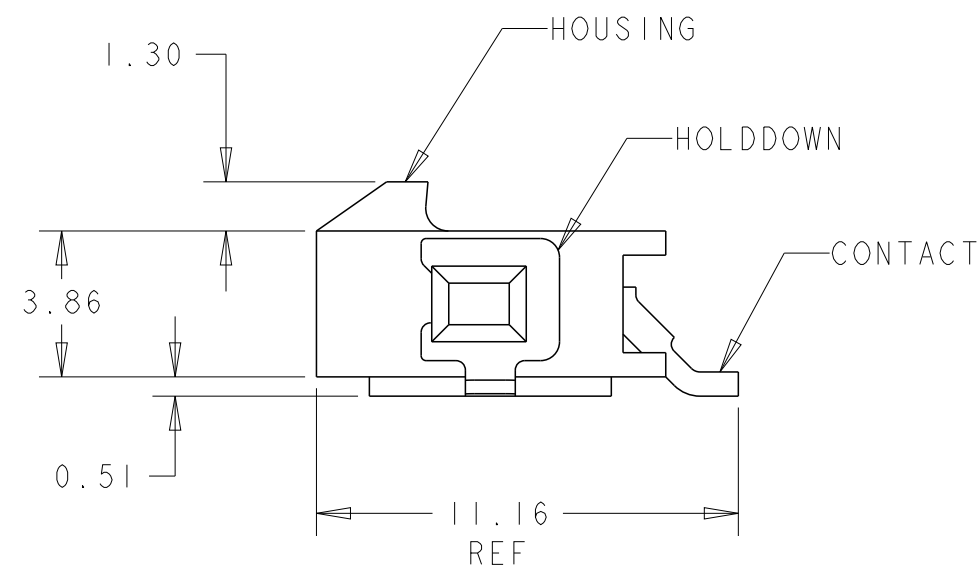


⚠ MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.

2 PLATING: CONTACTS- 2.54μm MINIMUM TIN LEAD OVER 1.27μm MINIMUM NICKEL.
HOLDDOWNS- 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.

△ 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

5 PLATING: CONTACTS-2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.
HOLDDOWNS- 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.

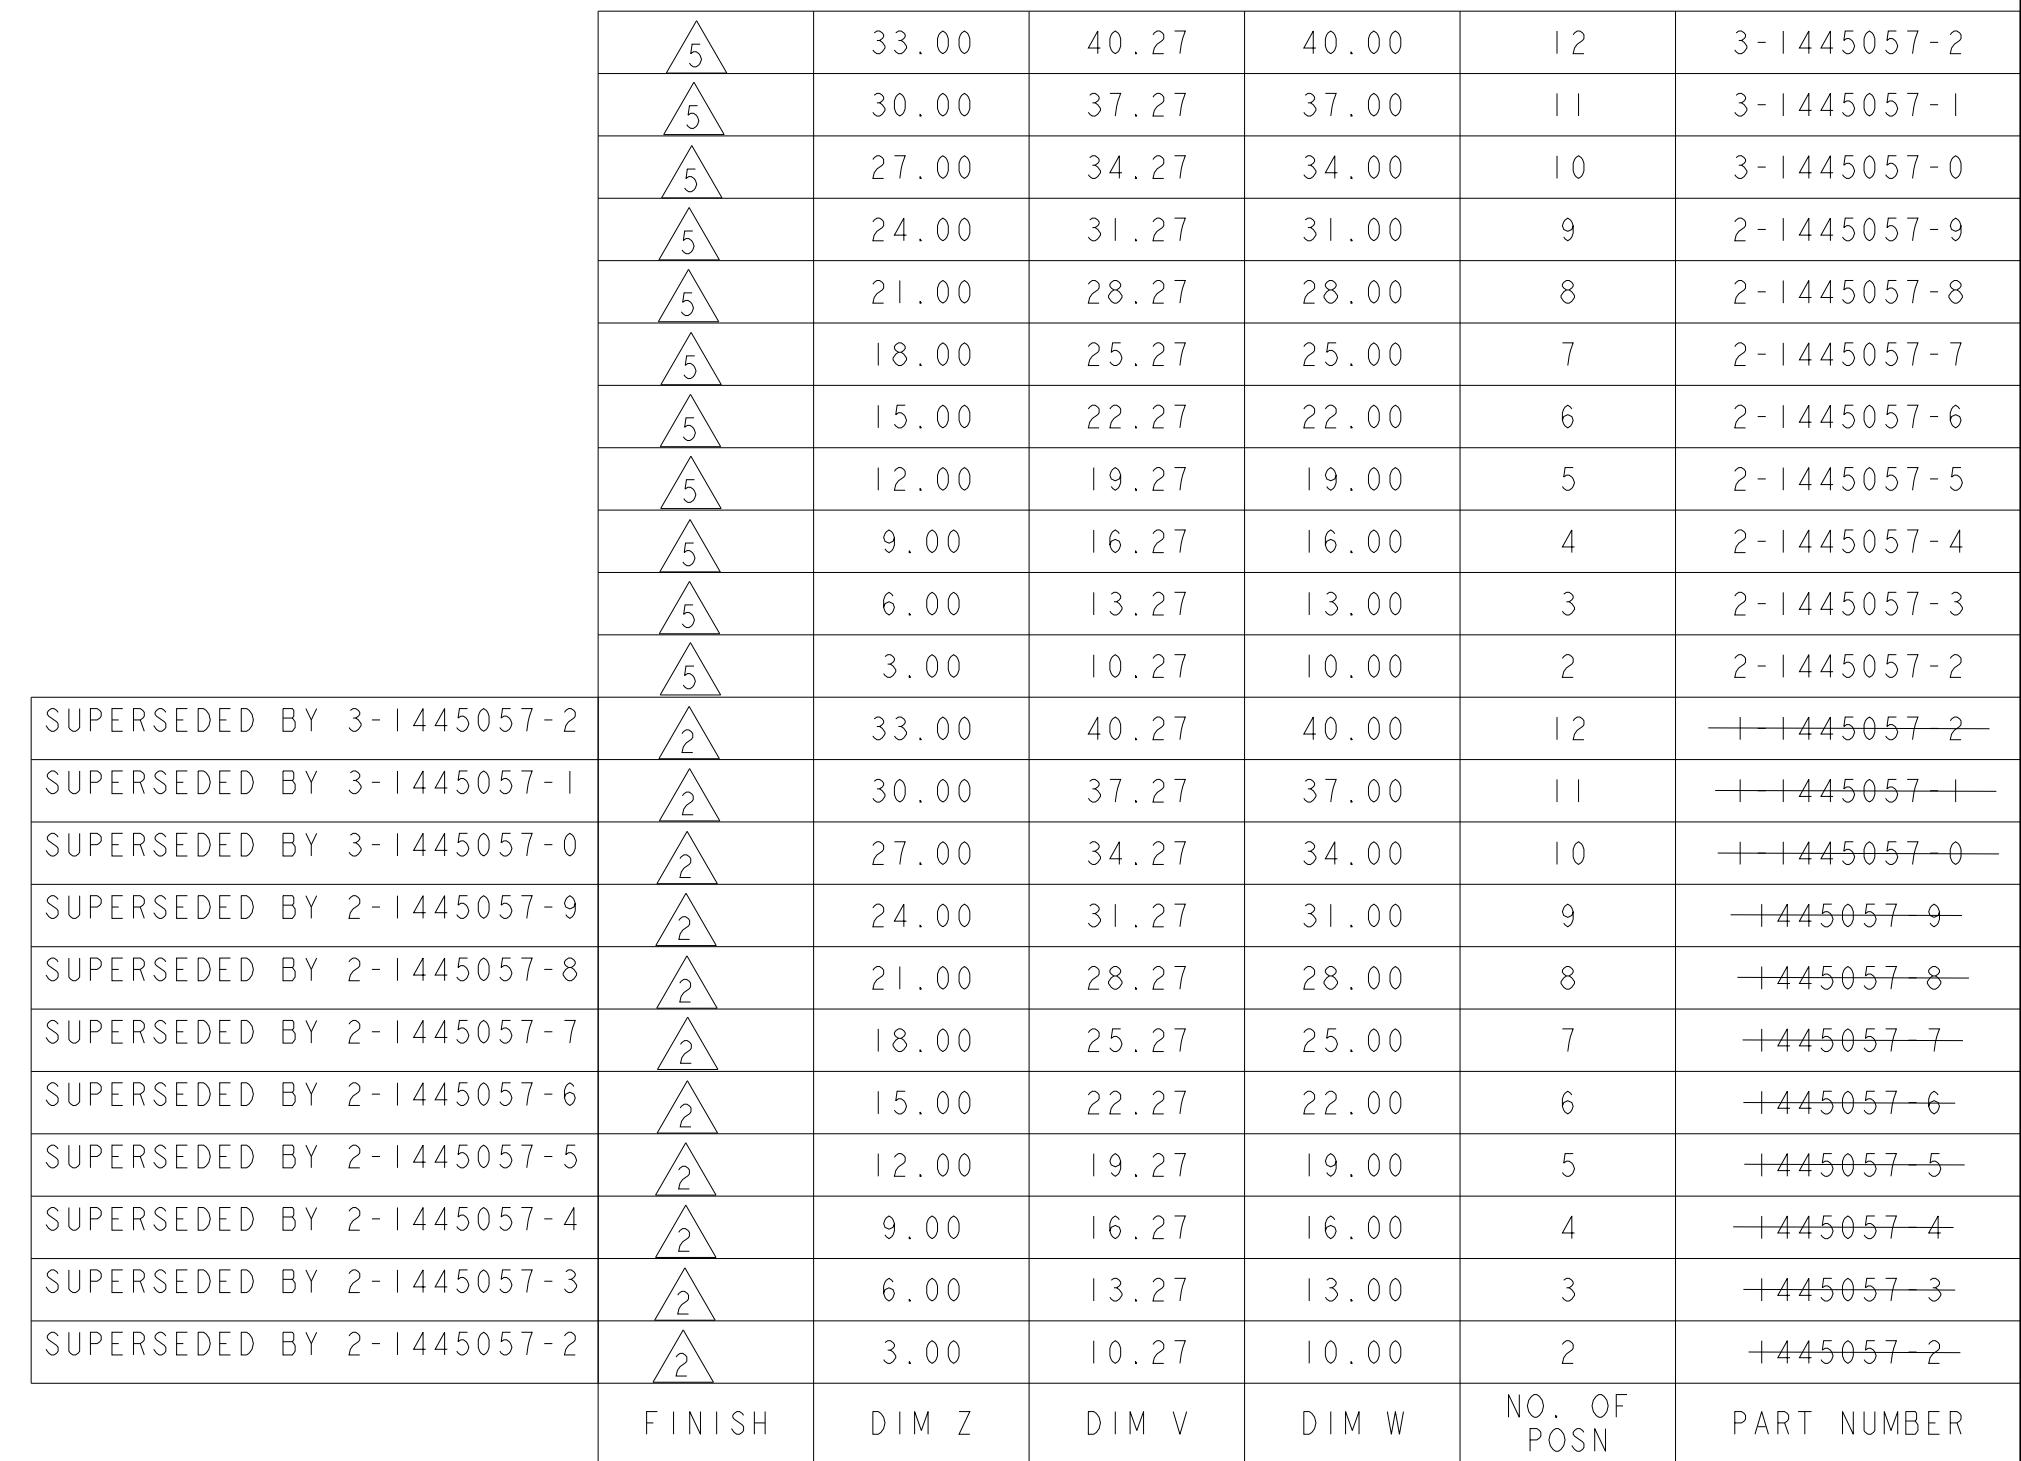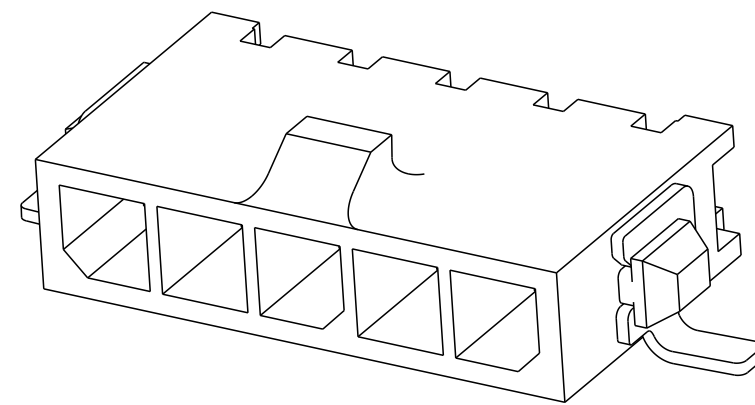

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 03-OCT-2000		 TE Connectivity	
		CHK K. WHITAKER 13-MAR-2001			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.13 2 PLC ±. 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH		NAME RT ANGLE SURFACE MOUNT HEADER ASSY, TIN CONTACTS W/SURF MOUNT HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™	
mm					
		PRODUCT SPEC 108-1836		SIZE A2	
		APPLICATION SPEC 114-13000			
MATERIAL		WEIGHT -		CAGE CODE 00779	
		SEE TABLE		DRAWING NO C-1445057	
		CUSTOMER DRAWING		RESTRICTED TO -	
				SCALE 5:1	
				SHEET 1 OF 1	
				REV C3	

PCB LAYOUT COMPONENT SIDE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1445057-2](#)