
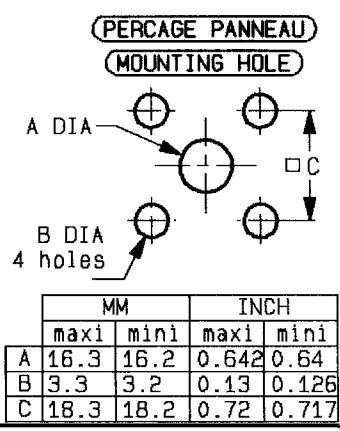
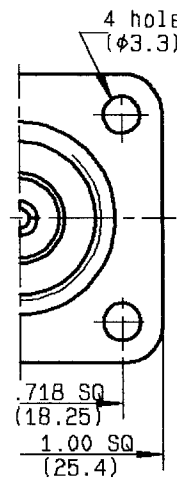


ADAPTOR FEMALE BNC - FEMALE N
FLANGE TYPE

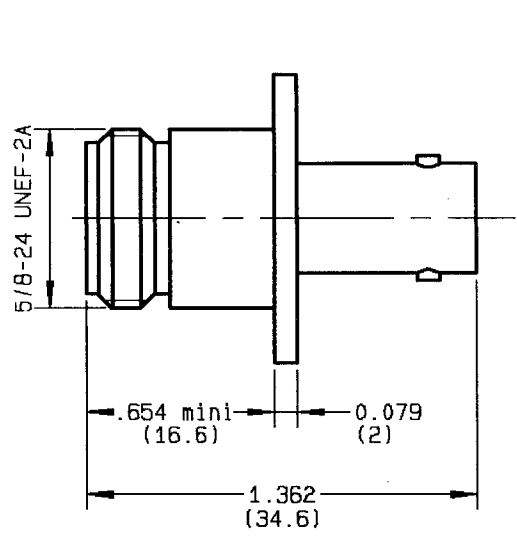

CABLES : -

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0 - 4	GHz
TEMPERATURE RATING	-65/+165	°C
VSWR	1.30	Maxi
RF INSERTION LOSS	.12	√F(GHz) dB Maxi
VOLTAGE RATING	500	Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	1500	Vrms min
INSULATION RESISTANCE	5000	MΩ min
HERMETIC SEAL	-	cc/s Atm.cm3/s
LEAKAGE (pressurized only)	-	psi MPa
WEIGHT	0	Oz g
-	-	-

STANDARDISATION	-
CABLE RETENTION	- lb min N
CENTER CONTACT RETENTION	-
Axial force - mating end	5.95 ²⁷ lb min N
Axial force - opposite end	5.95 ²⁷ lb min N
Torque (Min)	NA ^{NA} Inch.oz cm.N
RECOMMENDED TORQUES	-
Mating	NA ^{NA} Inch.lb cm.N
Panel nut	NA ^{NA} Inch.lb cm.N
Clamp nut	NA ^{NA} Inch.lb cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	BRASS	NICKEL
OUTER CONTACT	-	-
CENTER CONTACT	BERYLLIUM COPPER	GOLD over NICKEL
INSULATOR	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.

Initiated on 19-04-93	The information given here is subject to change without notice. Design changes may be in order to improve the product.	R RADIALL [®]
Superseded on - - -	-	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R191424000](#)