

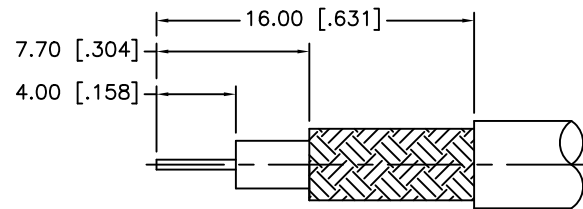
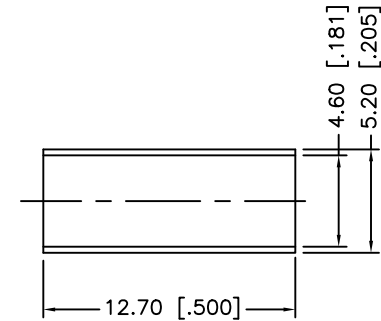


REV.	DATE	DESCRIPTION
A	04/05/03	UPDATE DRAWING FORMAT
B	07/19/07	REVISE BARREL AND FERRULE DIMENSIONS

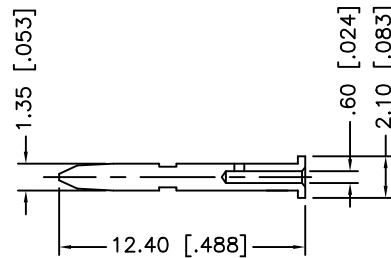

RECOMMENDED CABLE
STRIPPING DIM'S

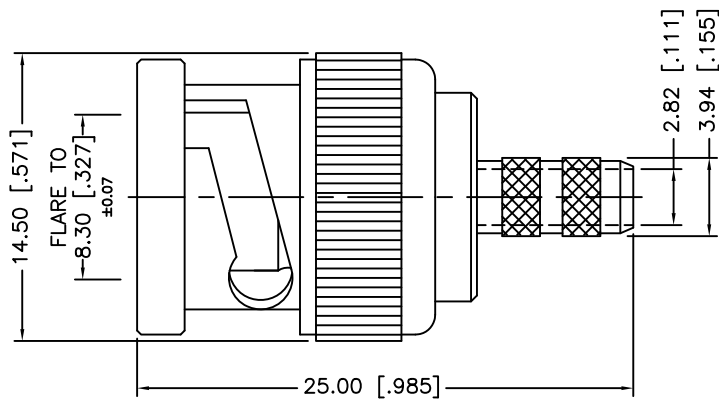

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	07/19/07							
7						CHECKED									
6											PART DESCRIPTION				
5	FERRULE	BRASS	NICKEL	1							BNC CRIMP PLUG				
4	GASKET	RUBBER	RED	1							(BELDEN 8218/VFM 809/1407B/1167B-75ohms)				
3	INSULATOR	TEFLON	NATURAL	1						PART NO. 112955					
2	CONTACT PIN	BRASS	GOLD	1	SHEET 1 OF 1										
1	SHELL/BODY	BRASS	NICKEL	1						DWG. NO. 112955.DWG REV. B SIZE A SCALE NA					
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING										
					CAD FILE C:/112/112955.DWG										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112955](#)