

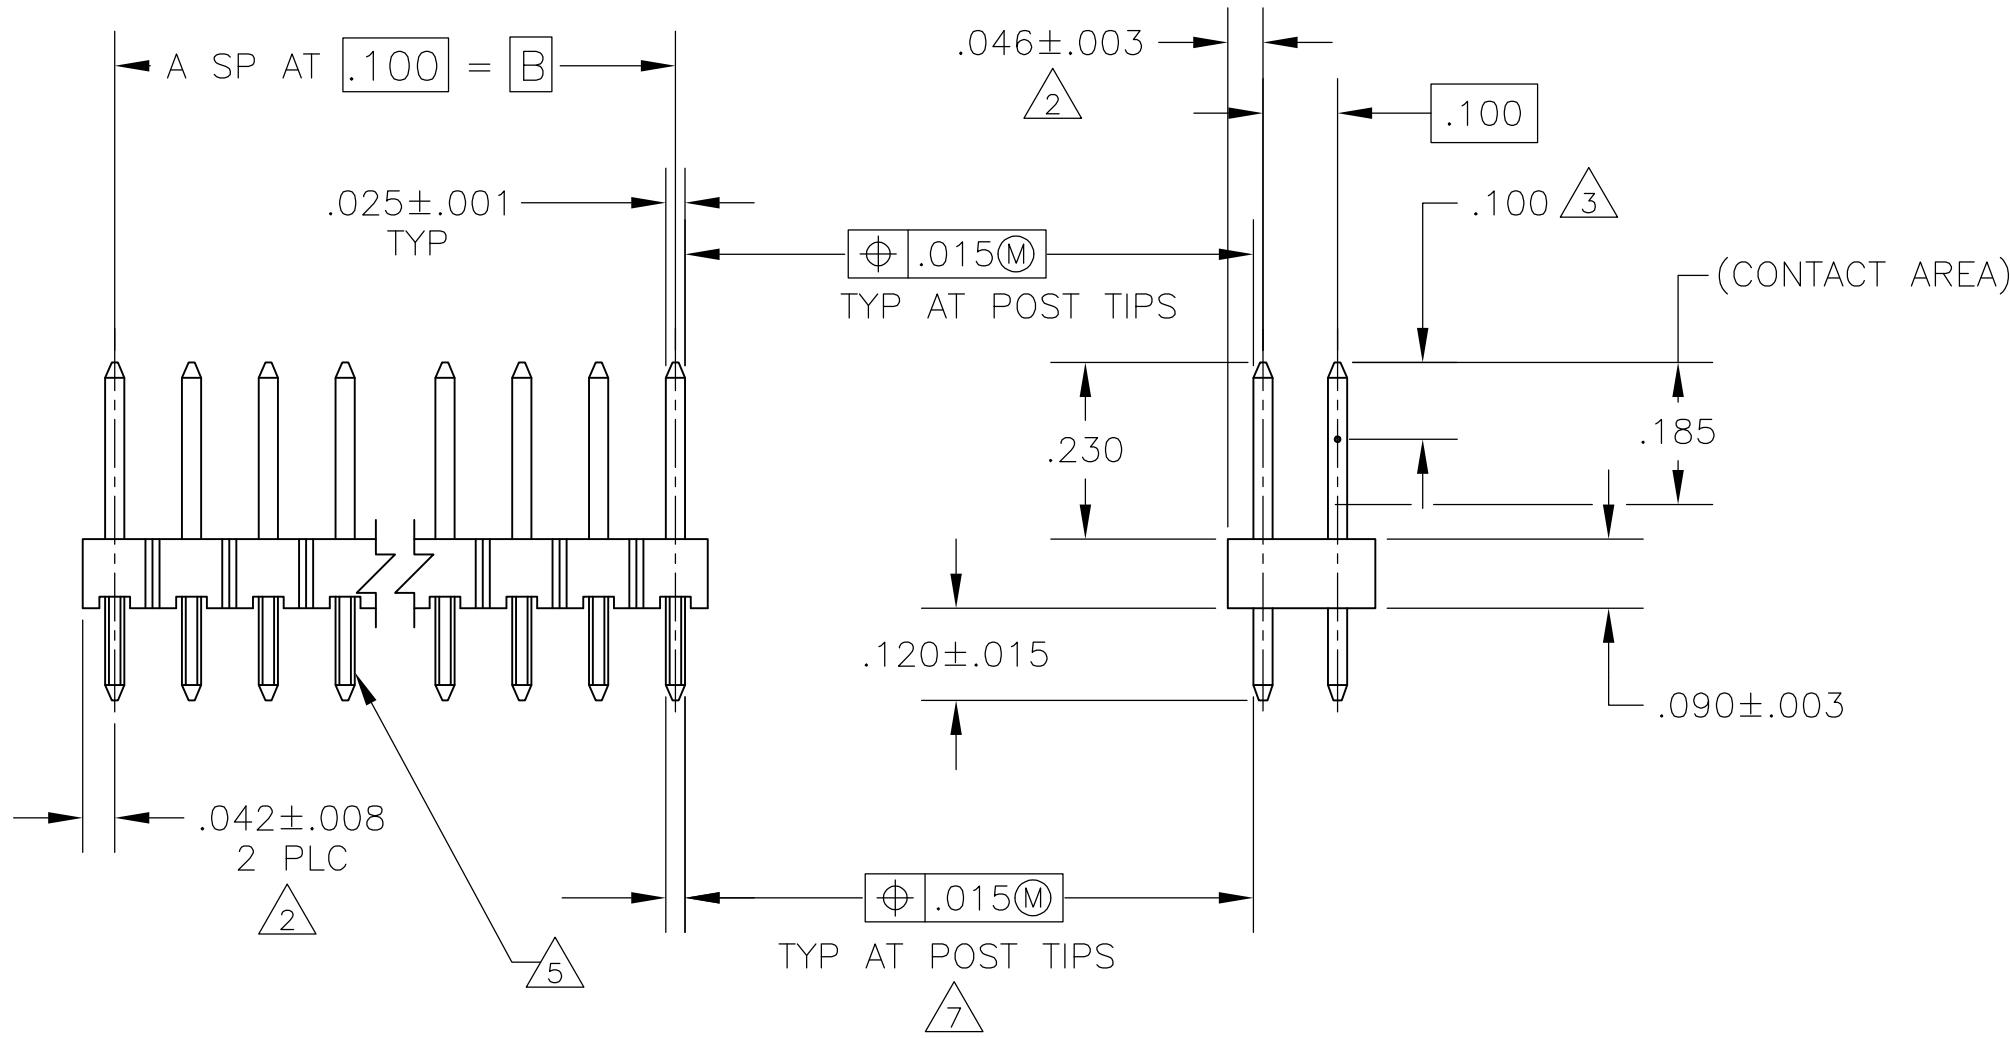


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
		S	REVISED	PER ECO-14-000066				

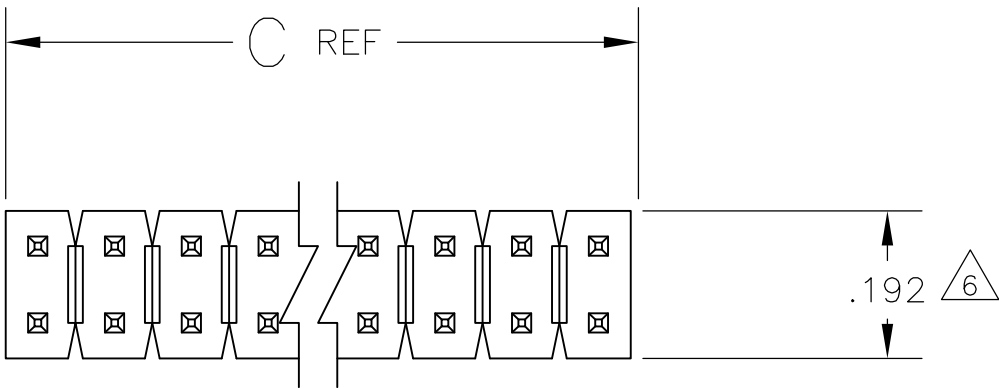


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 4 PART INDICATED IS PACKAGED IN SINGLE TUBES.
- 5 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 6 FOR 2 POSITION PART ONLY, THE NOTED DIMENSION IS .184
- 7 $\varnothing .020 \text{ (M)}$ FOR KINKED TAILS
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 104351-8	8 OBSOLETE		1.784	1.700	17	36	2-104351-3
	4	4	.784	.700	7	16	2-104351-2
SUPERSEDED BY 1-104351-3	4	4	1.284	1.200	12	26	2-104351-1
	8 OBSOLETE		3.984	3.900	39	80	2-104351-0
8 OBSOLETE			2.984	2.900	29	60	1-104351-9
			2.484	2.400	24	50	1-104351-8
OBSOLETE			1.984	1.900	19	40	1-104351-7
	8		1.684	1.600	16	34	1-104351-6
SUPERSEDED BY 6-146268-4			1.484	1.400	14	30	1-104351-5
			1.384	1.300	13	28	1-104351-4
SUPERSEDED BY 6-146268-1			1.284	1.200	12	26	1-104351-3
			1.184	1.100	11	24	1-104351-2
8 OBSOLETE			1.084	1.000	10	22	1-104351-1
			.984	.900	9	20	1-104351-0
8 OBSOLETE			.884	.800	8	18	104351-9
			.784	.700	7	16	104351-8
			.684	.600	6	14	104351-7
			.584	.500	5	12	104351-6
			.484	.400	4	10	104351-5
			.384	.300	3	8	104351-4
			.284	.200	2	6	104351-3
			.184	.100	1	4	104351-2
			.084	—	—	2	104351-1
	REMARKS	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

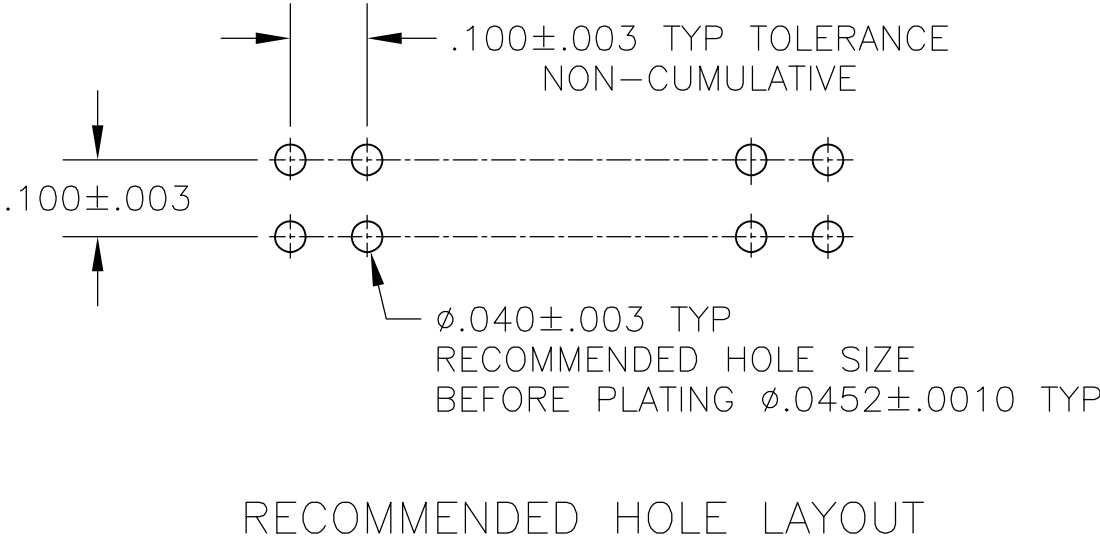

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN H MOLL	08FEB88	 TE Connectivity				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK R FEJDT	08FEB88					
	0 PLC ± -		1 PLC ± -	APVD R FEJDT	08FEB88	NAME				
	2 PLC ± -		3 PLC ± .005	PRODUCT SPEC		HEADER ASSY, MOD II, BREAKAWAY, DBL ROW, .100X.100 CL VERT, .025 SQ POSTS, WITH RETENTION FEATURE				
	4 PLC ± -		ANGLES ± -	APPLICATION SPEC		SIZE				
	MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR: BLACK CONTACT: COPPER ALLOY		FINISH: .00015 GOLD IN CONTACT AREA .000125-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL		WEIGHT		CAGE CODE		DRAWING NO	RESTRICTED TO
	A1		C104351		CUSTOMER DRAWING		SCALE		SHEET	REV
						4:1		1 OF 1	S	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104351-5](#)