#### SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REDUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN HET:

UL RECOGNIZED: UL 1283 CSA CERTIFIEO: CSA 22.2, # 8 VDE APPROVED: EN60939-2

#### OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 6 AMP, 120/250 VAC

6 AMP/40°C, 250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND:

@120V 60Hz 5 µA @250V 50Hz

DPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir. IN AN AMBIENT,  $T_0$ , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT,  $T_0$ , IS AS FOLLOWS:  $T_0 = T_0 - \sqrt{100 - T_0}$ 100 - To Io=Ir 7

### RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS € 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONOS

CATALOG # 6EAHP ECN # [APPRVO.] DATE PJO O1DEC08

17-001208

01/27/17

### TEST SPECIFICATIONS:

INDUCTANCE: 0.465 mH NOMINAL CAPACITANCE: (MEASURED @ IKHz, 0.250VAC MAX., 25°C±1°C) NONE

LINE TO GROUND: LINE TO LINE: 0.009 µF ±20% DISCHARGE RESISTOR:

1.5 MA

NO DISCHARGE RESISTOR:

5000M∧ (MIN.) @ 100VDC,


20°C AND 50% RH

## RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500VAC DR 2250VDC FOR 1 MINUTE LINE TO LINE: 1450VDC FOR 1 MINUTE

### FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

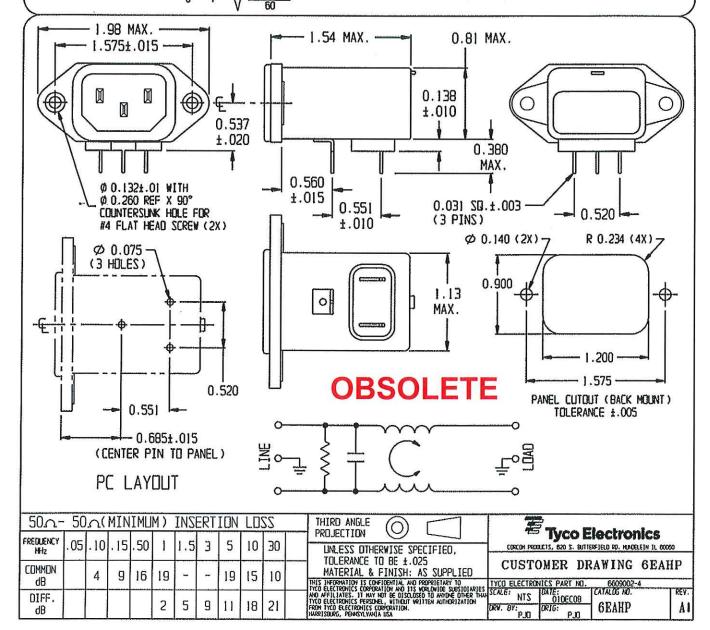

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: