



R-100/SS

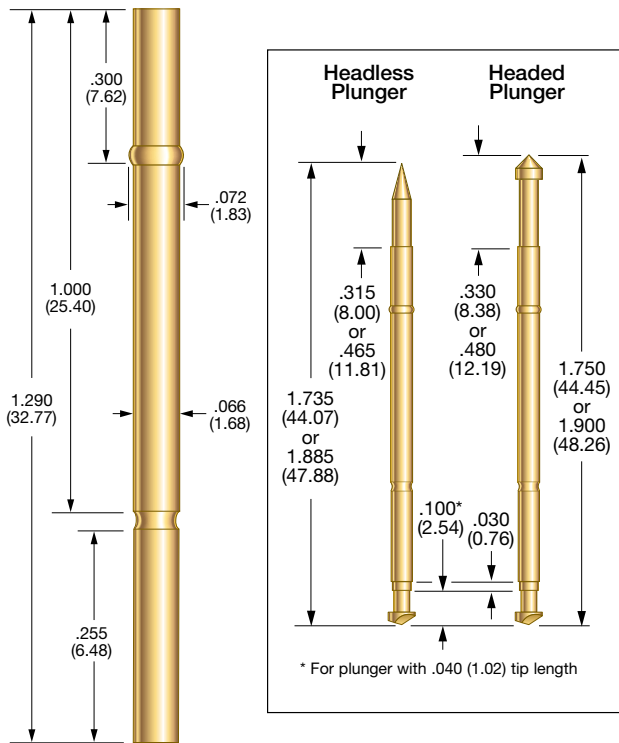

R-SS/SS

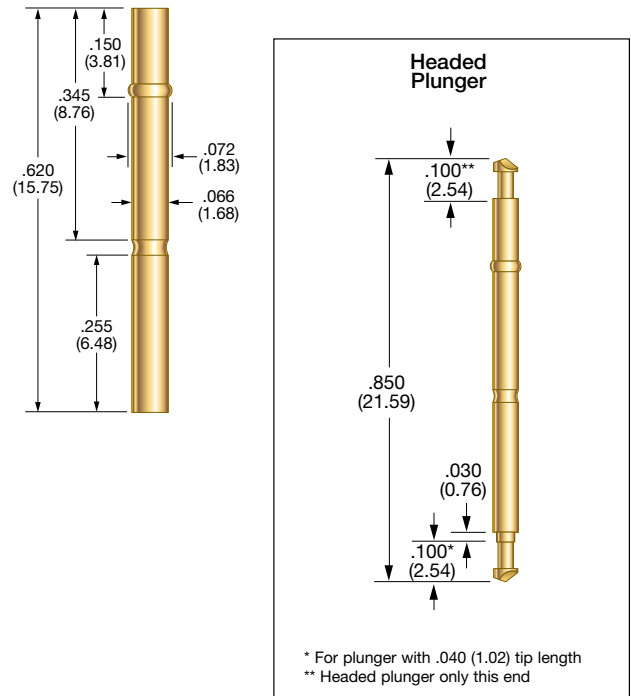

RECEPTACLE SPECIFICATIONS

Minimum Centers: .100 (2.54)
 Drill Size: #50
 Mounting Hole Size: .068/.070 (1.73/1.78)

MATERIALS

High Performance Series: Nickel/silver, gold plated
 Standard Series: Nickel/silver
 This receptacle houses a S-100, ICT-100 or ICT-L100 probe on the top end and an SS100 or GSS100 probe on the bottom end.

RECEPTACLE SPECIFICATIONS

Minimum Centers: .100 (2.54)
 Drill Size: #50
 Mounting Hole Size: .068/.070 (1.73/1.78)

MATERIALS

High Performance Series: Nickel/silver, gold plated
 Standard Series: Nickel/silver
 This receptacle houses an SS100 or GSS100 probe on each end.

HOW TO ORDER

R-100/SS High Performance Series
 RS-100/SS Standard Series

HOW TO ORDER

R-SS/SS High Performance Series
 RS-SS/SS Standard Series

Specifications subject to change without notice. Dimensions in inches (millimeters)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Smiths Interconnect:](#)

[RSS/SS](#) [RSS-100-CR](#) [R-SS-100-NT](#)